



FirstSpirit™

Unlock Your Content

FirstSpirit™ Release Notes

FirstSpirit™ Version 5.2 Releases 2-20

| | |
|-------------------|--------------------------------|
| Version | 5.2R2-20 |
| Status | RELEASED |
| Date | 2018-04-17 |
| Department | FS-Core |
| Copyright | 2018 e-Spirit AG |
| File name | Combined_Releasenotes_5.2R2-20 |

e-Spirit AG

Stockholmer Allee 24
44269 Dortmund | Germany

T +49 231 . 477 77-0
F +49 231 . 477 77-499

info@e-Spirit.com
www.e-Spirit.com

e-Spirit

Table of contents

| | | |
|-----------|---|--------------|
| 1 | Welcome to the Release Notes for FirstSpirit Version 5.2 Release 2! | |
| | 5.2R2 | 18 |
| 2 | Discontinuation of the proprietary installation packages for FirstSpirit version 5.2R5 | 5.2R4 |
| | | 19 |
| 3 | Notes concerning downgrades / upgrades | 5.2R4 |
| | | 19 |
| 4 | Documentation for FirstSpirit SiteArchitect: now available in HTML format, too | 5.2R4 |
| | | 20 |
| 5 | New user interface for the trouble ticket system | 5.2R5 |
| | | 22 |
| 6 | FirstSpirit HTML documentation | 5.2R5 |
| | | 22 |
| 7 | Code signing certificates | 5.2R5 |
| | | 23 |
| 8 | System requirements | 5.2R7 |
| | | 24 |
| 9 | Incompatibilities with specific Java versions | 5.2R7 |
| | | 25 |
| 10 | Innovations concerning the FirstSpirit Release Management | |
| | 5.2R12 | 25 |
| 11 | FirstSpirit Manual for Administrators | 5.2R12 |
| | | 26 |
| 12 | Indexing of referenced datasets ("indexing.maxNoOfAssociations") | |
| | 5.2R12 | 26 |
| 13 | Java support (Oracle Java 9) | 5.2R13 |
| | | 27 |
| 14 | Support for the distributed development of FirstSpirit projects (External Synchronization) | 5.2R14 |
| | | 27 |
| 15 | FirstSpirit documentation in HTML format | 5.2R14 |
| | | 29 |



| | | | |
|----|--|--------|----|
| 16 | Oracle Java 9 | 5.2R14 | 29 |
| 17 | Support of Oracle Java | 5.2R15 | 30 |
| 18 | FirstSpirit Third Party Preview (TPP) | 5.2R16 | 30 |
| 19 | Advance notice: Rebrush for FirstSpirit components | 5.2R16 | 31 |
| 20 | Rebrush for FirstSpirit graphical user interfaces | 5.2R17 | 31 |
| 21 | Database schemata: New system column | 5.2R17 | 33 |
| 22 | Changes regarding AccessControlDb / ACL in FirstSpirit 5.2R16 / 5.2R17 | 5.2R17 | 33 |
| 23 | FirstSpirit product update 2018 | 5.2R18 | 34 |
| 24 | Oracle Berkeley DB 7 | 5.2R18 | 35 |
| 25 | Oracle Java | 5.2R18 | 36 |
| 26 | Eclipse Jetty | 5.2R18 | 37 |
| 27 | Browser integration | 5.2R18 | 38 |
| 28 | FirstSpirit product update 2018 | 5.2R19 | 39 |
| 29 | Oracle Berkeley DB | 5.2R19 | 40 |
| 30 | Oracle Java | 5.2R19 | 41 |
| 31 | FirstSpirit Content Experience Tools (Start of EAP phase) | 5.2R20 | 44 |
| 32 | Use of Oracle Java 9 and 10 | 5.2R20 | 46 |
| 33 | Oracle Berkeley DB 7: Optimizations and tips on conversion time | 5.2R20 | 50 |



| | | | |
|-----------|---|----------------|-----------|
| 34 | Microsoft Edge Support | 5.2R20 | 53 |
| 35 | Administration / Modules | | 53 |
| 35.1 | HTTPS Support for the Module "Eclipse Jetty" (EAP) | 5.2R19 | 53 |
| 35.2 | Log in via Kerberos ticket "KerberosLoginModule") | 5.2R2 | 54 |
| 36 | Administration | | 55 |
| 36.1 | Apache Tomcat / Java Servlet Specification 3.0: Disabling Pluggability features | 5.2.611, 5.2R7 | 55 |
| 36.2 | Archiving: Tagged revisions are now partly taken into account | 5.2R13 | 56 |
| 36.3 | Automatic deletion of files from local user directories | 5.2R15 | 57 |
| 36.4 | Caching of preview files | 5.2.615, 5.2R7 | 57 |
| 36.5 | Changed standard configuration of session cookies for new installations | 5.2R5 | 58 |
| 36.6 | Configuration of session cookies (fs-server.conf) | 5.2.426, 5.2R5 | 59 |
| 36.7 | Conversion of the Oracle Berkeley DB (EAP) | 5.2R19 | 60 |
| 36.8 | Conversion of the Oracle Berkeley DB (EAP) | 5.2R20 | 64 |
| 36.9 | Encryption of passwords in FirstSpirit configuration files | 5.2R16 | 65 |
| 36.10 | Expired license warning | 5.2R2 | 65 |
| 36.11 | FirstSpirit ServerMonitoring: Display of user sessions | 5.2R16 | 66 |
| 36.12 | Forwarding of HTTP Header Information to an External Preview URL | 5.2R3 | 66 |
| 36.13 | Importing a project with missing presentation channel | 5.2R13 | 67 |
| 36.14 | Isolated mode: Jetty web server is now also available as a module | 5.2R13 | 67 |
| 36.15 | Log in via the HTTP request header ("RequestHeaderLoginModule") | 5.2R2 | 69 |



| | | | |
|-------|--|----------------|----|
| 36.16 | Logging in "fs-server.log" (NoRouteToHostException) | 5.2R7 | 70 |
| 36.17 | MBeans for visualization and control of database connections ("ConnectionPool") | 5.2.426, 5.2R5 | 70 |
| 36.18 | Media Constraints: MIME Type Detection | 5.2R17 | 71 |
| 36.19 | Media: Assigning File Extensions to MIME Types | 5.2R10 | 71 |
| 36.20 | Modified protocol for FirstSpirit web applications | 5.2R4 | 72 |
| 36.21 | New Configuration Opportunity for Timeouts in LDAP Sections and for Login to the Root Web Application (fs-server.conf) | 5.2R20 | 72 |
| 36.22 | New MBeans | 5.2R15 | 73 |
| 36.23 | Optimization in Schedule Management | 5.2R18 | 74 |
| 36.24 | Optimizations related to use of the FirstSpirit Launcher | 5.2R3 | 74 |
| 36.25 | Permissions for FirstSpirit modules (Template Wizard, Template Debugger, Template Inspection) | 5.2R2 | 75 |
| 36.26 | Project archiving: Abort archival due to insufficient available storage space | 5.2R15 | 77 |
| 36.27 | Proxy authentication via Kerberos/SPNEGO or NTLM | 5.2R2 | 78 |
| 36.28 | Reduce project exports by excluding pre-calculated image resolutions | 5.2R2 | 79 |
| 36.29 | Refactoring of the file fs-webapp.xml (web server "Jetty") | 5.2R12 | 80 |
| 36.30 | SMTP Authentication | 5.2R3 | 81 |
| 36.31 | Schedule Tasks: Option "Execute even in case of error" is turned off by default | 5.2R19 | 82 |
| 36.32 | Schedule management, action "Execute generation": New setting - Generate release version or current state | 5.2R15 | 83 |



| | | |
|-----------|--|----------------------|
| 36.33 | Security improvements in FirstSpirit ServerMonitoring and web applications | |
| | 5.2R2 | 84 |
| 36.34 | Server Update: File name change for backup copies of files | 5.2R6 |
| | | 84 |
| 36.35 | Server update: Improved schedule logging | 5.2.515, 5.2R6 |
| | | 85 |
| 36.36 | Server updates using "pull" method | 5.2R5 |
| | | 86 |
| 36.37 | Start-up process: FirstSpirit server starts up independently of web application updates | 5.2R6 |
| | | 87 |
| 36.38 | Starting process: Improved stability when accessing FirstSpirit web applications on external web servers | 5.2.515, 5.2R6 |
| | | 87 |
| 36.39 | The new FirstSpirit Health Center | 5.2R4 |
| | | 88 |
| 36.40 | Updating web applications on external web servers | 5.2.615, 5.2R7 |
| | | 91 |
| 36.41 | Using preview applications in the ContentCreator (TPP) | 5.2R16 |
| | | 92 |
| 36.42 | Web server "Jetty" is now system module | 5.2R20 |
| | | 93 |
| 36.43 | Web server Apache Tomcat: Automatic update of web applications | 5.2R6 |
| | | 95 |
| 37 | Compatibility..... | 97 |
| 37.1 | Downgrade to FirstSpirit 5.1 when using Berkeley DB V5 | 5.2R3 |
| | | 97 |
| 38 | ContentCreator..... | 98 |
| 38.1 | Create new list items using the FS_BUTTON | 5.2R2 |
| | | 98 |
| 38.2 | Deletion of bookmarks and master copies | 5.2.611, 5.2R7 |
| | | 100 |
| 38.3 | Dynamically resizable report sidebar | 5.2R8 |
| | | 100 |
| 38.4 | FS_CATALOG: New Entry Form Is Opened Immediately | 5.2R19 |
| | | 101 |
| 38.5 | FS_INDEX: multiple selection possible in selection dialog | 5.2R20 |
| | | 101 |



- 38.6 Filter in FS_REFERENCE via <SOURCES> 5.2R3 102
- 38.7 Identification of user interface elements 5.2R7 103
- 38.8 Improved performance when displaying datasets in input components
5.2R4 103
- 38.9 Move sections into other content areas 5.2R2 104
- 38.10 Project-specific action menu 5.2R6 104
- 38.11 Selection dialog for next editor(s) of a workflow 5.2R4 105
- 38.12 Stepless Resizing of the Input Component "Link-Sensitive
Graphic" (CMS_INPUT_IMAGE_MAP) 5.2R3 107
- 38.13 Visualization of frequently used objects 5.2R2 107
- 38.14 Workflows on media and media folder elements 5.2.611, 5.2R7 109
- 39 External Synchronization / Content Transport..... 110**
- 39.1 Export of database schema information has been modified 5.2R13 110
- 40 External Synchronization..... 111**
- 40.1 Consideration of Custom Properties in External Synchronization 5.2R17 111
- 40.2 Deletion of obsolete files and additional logging 5.2R7 112
- 40.3 Detection of empty directory structures (missing meta files) 5.2R14 114
- 40.4 Export: Additional information about exported files (interface
"ExportOperation.Result") 5.2R14 114
- 40.5 Export: Explicitly and implicitly selected objects 5.2R14 114
- 40.6 Export: Folder "Lost & Found" will no longer be exported 5.2R14 115
- 40.7 External Synchronization: More stable identification of objects (using GIDs)
5.2R12 115



| | | | |
|-----------|--|--------|------------|
| 40.8 | GUI will be omitted | 5.2R4 | 116 |
| 40.9 | General changes to the data format | 5.2R14 | 116 |
| 40.10 | Import: Abort in case of required but missing objects | 5.2R14 | 117 |
| 40.11 | Import: Deletion of objects | 5.2R14 | 118 |
| 40.12 | Import: Identification of new and modified datasets using API (interface "ImportOperation.Result") | 5.2R14 | 118 |
| 40.13 | New method "getModifiedProjectProperties" returns imported project properties | 5.2R4 | 119 |
| 40.14 | New method "setExportRelease" to specify whether the release or the current state of elements should be exported | 5.2R4 | 119 |
| 40.15 | New method "setIgnoreEntities" replaces "setCreateEntities" | 5.2R4 | 120 |
| 40.16 | Optimized performance | 5.2R2 | 121 |
| 41 | General | | 121 |
| 41.1 | Code signing certificate updated | 5.2R5 | 121 |
| 41.2 | Code signing certificate updated | 5.2R9 | 121 |
| 41.3 | Databases: Support for Microsoft SQL Server 2016 and data type "ntext" | 5.2R10 | 121 |
| 41.4 | Datenbases: Support for MariaDB | 5.2R12 | 122 |
| 41.5 | Main memory requirements for FirstSpirit SiteArchitect | 5.2R15 | 122 |
| 41.6 | Publication of FirstSpirit Javadoc via separate Jar files | 5.2R9 | 123 |
| 42 | Input components | | 123 |
| 42.1 | Dynamic Forms: New Property "PRESET" | 5.2R17 | 123 |
| 42.2 | Extended snippet access for FS_INDEX and FS_CATALOG | 5.2R4 | 123 |



| | | | |
|-----------|---|----------------|------------|
| 42.3 | FS_CATALOG: Nesting of language-dependent input components | 5.2R5 | 126 |
| 42.4 | FS_CATALOG: Representing language independent content (link lists) | 5.2R16 | 130 |
| 42.5 | FS_INDEX: Editorial functionality using drag-and-drop | 5.2.424, 5.2R5 | 130 |
| 42.6 | FS_INDEX: Emptiness check with ".isEmpty" | 5.2.611, 5.2R7 | 136 |
| 42.7 | FS_INDEX: Manually Sorting Datasets | 5.2R17 | 137 |
| 42.8 | FS_LIST, FS_INDEX, FS_CATALOG: Optimization of Multi-Language Display | 5.2R19 | 140 |
| 42.9 | Methods ".convert" and ".convert2" in FS_LIST | 5.2R4 | 141 |
| 43 | Media | | 141 |
| 43.1 | Optimized identification of file format of media uploaded via drag-and-drop | 5.2R4 | 141 |
| 43.2 | Recognition of file types when uploading media using drag-and-drop improved | 5.2.515, 5.2R6 | 142 |
| 43.3 | Support for files with more than one dot character in their names | 5.2R5 | 143 |
| 44 | Module Development, Scripts, API | | 143 |
| 44.1 | Getting the host name per API (interface "ServerInformationAgent") | 5.2R10 | 143 |
| 44.2 | "WE_API" has new events | 5.2R20 | 143 |
| 44.3 | API Extension: RenderingAgent - Generating FirstSpirit content via API | 5.2R15 | 144 |
| 44.4 | Changed Behavior for Data Stream Builder Implementations With Aspect "Filterable" | 5.2R2 | 145 |
| 44.5 | Changes to GOM implementation class "GomButton" | 5.2R14 | 146 |



44.6 ContentCreator: Detection of the user interface language ("Locale") selected by the current user [5.2.611](#), [5.2R7](#) 146

44.7 ContentCreator: Displaying page-related status information prominently [5.2.518](#), [5.2R6](#) 147

44.8 ContentCreator: Extended configuration possibilities for information displays (WE_API) [5.2R15](#) 148

44.9 ContentCreator: Modify view of the dialog "Manage media" (de.espirit.firstspirit.webedit.plugin.media) [5.2R7](#) 149

44.10 ContentCreator: Opening the "Edit image section" dialog via API [5.2R5](#) 149

44.11 ContentCreator: Use of "setTitle" for a dialog's main title [5.2.611](#), [5.2R7](#) 152

44.12 ContentCreator: Using dropdown menus via API [5.2R5](#) 153

44.13 Creating maintenance mode schedule tasks via API [5.2.518](#), [5.2R6](#) 155

44.14 Deleting Elements [5.2R18](#) 157

44.15 Discontinuation ("Deprecation") of methods for the "Content2" interface [5.2R2](#) 157

44.16 E-mail addresses with special characters in the domain part [5.2R6](#) 158

44.17 Establishing connections via API in schedule task scripts [5.2.515](#), [5.2R6](#) 159

44.18 Examples for integration of external data sources using generic DataAccessPlugins [5.2R5](#) 160

44.19 Expansion of functions for communication between client-side Single Page Application (SPA) and ContentCreator (TPP) [5.2R16](#) 160

44.20 Extended functionality for FS_BUTTON scripts [5.2R18](#) 162

44.21 Extension of the interface "RenderingAgent" [5.2R18](#) 162

44.22 Extension of the interface "ScheduleStorage" [5.2R18](#) 164



| | | |
|-------|--|-----|
| 44.23 | External Synchronization / Content Transport: Selecting a database layer for import 5.2R5 | 165 |
| 44.24 | General information 5.2R2 | 166 |
| 44.25 | Handling dependent modules 5.2R2 | 166 |
| 44.26 | Identification of server mode (isolated vs. legacy) 5.2.611, 5.2R7 | 167 |
| 44.27 | Improved detection of identical or compatible module resources 5.2R6 | 168 |
| 44.28 | Individualizing the global FirstSpirit web applications 5.2R4 | 169 |
| 44.29 | Individualizing the global FirstSpirit web applications (BETA!) 5.2R3 | 170 |
| 44.30 | Interface "DataProvider": Creating a new dataset 5.2R19 | 173 |
| 44.31 | Interface "Executable" (package "de.espirit.firstspirit.access.script") improved 5.2R13 | 173 |
| 44.32 | Interface "PasswordAgent": encrypt passwords through the API 5.2R19 | 174 |
| 44.33 | Isolated mode (BETA) - Realignment of module development 5.2R6 | 174 |
| 44.34 | Making media language-dependent or language-independent via API 5.2R16 | 177 |
| 44.35 | Method save() observes the option "Server locks in content store" 5.2R2 | 178 |
| 44.36 | Methods for determining the absolute path to the schedule entry directory 5.2R2 | 178 |
| 44.37 | Modifying FeatureDescriptor objects stored server-side via API 5.2R12 | 178 |
| 44.38 | Multi Perspective Preview: Creating and configuring viewports via API 5.2R6 | 179 |
| 44.39 | New API interface "ConnectionExtractor" allows access to the connection of the logged-in user 5.2R16 | 180 |



| | | | |
|-----------|---|----------------|------------|
| 44.40 | New API interface "ProjectMembersAgent" provides information about users and groups | 5.2R15 | 180 |
| 44.41 | New Interfaces to Open Version Comparison and Merge Dialogs | 5.2R3 | 181 |
| 44.42 | New Method for Cancelling Maintenance Mode | 5.2R3 | 183 |
| 44.43 | New functions in "WE-API" | 5.2R20 | 184 |
| 44.44 | New interfaces and methods for implementing personal schedule actions | 5.2R3 | 184 |
| 44.45 | New method "getServiceConfig" in interface "ModuleAdminAgent" | 5.2R12 | 185 |
| 44.46 | Obtaining the most recent login date of a user via API | 5.2R16 | 185 |
| 44.47 | Reacting to page navigation events in ContentCreator | 5.2R13 | 185 |
| 44.48 | Recalculation of references for individual elements via ProjectReferencesAgent | 5.2R3 | 186 |
| 44.49 | RenderingAgent supports remote links | 5.2R16 | 186 |
| 44.50 | Repairing broken references (rebuildReferences) | 5.2R7 | 187 |
| 44.51 | Retrieving global system web apps | 5.2R20 | 187 |
| 44.52 | Saving Elements | 5.2R18 | 187 |
| 44.53 | Schedules: Creating and configuring an archival schedule action via API (de.espirit.firstspirit.access.schedule.ProjectCleanupTask) | 5.2R9 | 188 |
| 44.54 | SwingGadget Development: New Class "SwingFormViewMode" | 5.2R9 | 188 |
| 44.55 | Triggering a preview update via API (SiteArchitect and ContentCreator) | 5.2.615, 5.2R7 | 189 |
| 44.56 | Update of Web Applications | 5.2R4 | 190 |
| 45 | Modules (general) | | 191 |



- 45.1 Distribution of FirstSpirit web applications as modules (.fsm) 5.2R4 191
- 45.2 Distribution of the FirstSpirit web applications as modules (.fsm) 5.2R6 191
- 45.3 Library dependencies added in FirstSpirit web applications 5.2.515, 5.2R6 191
- 46 Modules: Content Transport.....192**
- 46.1 Moving datasets and changing the explicit/implicit state of elements 5.2R20 ... 192
- 47 Modules: Corporate Content..... 195**
- 47.1 Allowed section templates are now only "optionally" required during an import process 5.2R13 195
- 47.2 ContentTransport: Archival of deleted feature collections 5.2R7 197
- 47.3 ContentTransport: Deleting feature collections 5.2.611, 5.2R7 199
- 47.4 Editing multiple packages 5.2R4 200
- 47.5 Multisite Management: Export of image resolutions 5.2.611, 5.2R7 200
- 47.6 Multisite Management: Transport of table templates into projects with different language counts 5.2.615, 5.2R7 202
- 47.7 Refresh package display 5.2R4 205
- 47.8 Removal of write permissions in subscribing projects ("Changeable") 5.2R15 205
- 48 Modules: Corporate Media.....208**
- 48.1 Limiting selections from remote projects to objects with a release state 5.2R4 208
- 48.2 Specifying URL creation method for remote projects 5.2R10 210
- 49 Modules: FOP.....212**



| | | | |
|-----------|--|--------|------------|
| 49.1 | Specify Standard Image Resolution | 5.2R4 | 212 |
| 50 | Modules: OfficeConnect | | 213 |
| 50.1 | Pasting as plain text with Ctrl+Shift+V | 5.2R11 | 213 |
| 51 | Modules: Security | | 214 |
| 51.1 | Improved Problem Recognition When Accessing an Access Control Database | 5.2R20 | 214 |
| 52 | Repository | | 214 |
| 52.1 | Berkeley DB 7: Optimizations | 5.2R20 | 214 |
| 52.2 | Faster migration from Oracle Berkeley DB 3 to 5 | 5.2R16 | 214 |
| 52.3 | Oracle Berkeley DB 7 (EAP) | 5.2R18 | 215 |
| 53 | Search | | 217 |
| 53.1 | Controlling indexing of referenced datasets | 5.2R12 | 217 |
| 53.2 | Project-specific configuration of indexing for referenced datasets | 5.2R15 | 221 |
| 53.3 | Weighting of Contents in Input Components | 5.2R3 | 222 |
| 54 | Security | | 225 |
| 54.1 | Behavior of the HTTP header "X-Frame-Options" is now configurable for the FirstSpirit web applications fs5root and fs5webmon | 5.2R12 | 225 |
| 54.2 | Java Vulnerability (Serialization/Deserialization) | 5.2R3 | 226 |
| 55 | SiteArchitect / ContentCreator | | 227 |
| 55.1 | Access to FS_INDEX value set | 5.2R2 | 227 |
| 55.2 | Different Validation Behavior for Different Languages | 5.2R19 | 228 |



| | | | |
|-----------|---|----------------|------------|
| 55.3 | Dynamic forms: New property "CONTAINERTYPE" | 5.2R6 | 229 |
| 55.4 | Optimized Search | 5.2R18 | 230 |
| 55.5 | Rebrush for FirstSpirit graphical user interfaces | 5.2R19 | 231 |
| 55.6 | Reports: Handling has been improved | 5.2.515, 5.2R6 | 231 |
| 55.7 | Snippets: Outputting Metadata | 5.2R18 | 232 |
| 56 | SiteArchitect / ServerManager | | 233 |
| 56.1 | Client Logging | 5.2R7 | 233 |
| 56.2 | Configurable directory for log messages | 5.2R10 | 234 |
| 56.3 | Configuration of the FirstSpirit start page | 5.2R19 | 235 |
| 56.4 | Reconnecting after Communication Errors | 5.2R5 | 238 |
| 56.5 | Speeding up file selection from directory structure of the client workstation | 5.2.515, 5.2R6 | 239 |
| 57 | SiteArchitect | | 240 |
| 57.1 | 'Group exclusion' function for transitions in workflows | 5.2R3 | 240 |
| 57.2 | Code completion optimizations | 5.2R7 | 244 |
| 57.3 | Configuring e-mail messaging in workflows | 5.2R2 | 246 |
| 57.4 | Context menu functionality and horizontal toolbar | 5.2R5 | 247 |
| 57.5 | Creating a section reference via context menu or keyboard shortcut | 5.2R8 | 248 |
| 57.6 | Display of Default Values in Data Sources | 5.2.426, 5.2R5 | 248 |
| 57.7 | Drag-and-drop support for CMS_INPUT_DOMTABLE | 5.2.424, 5.2R5 | 250 |
| 57.8 | Extended Filter and Sorting Functionality for Datasets | 5.2R3 | 251 |



| | | | |
|-----------|---|--------|------------|
| 57.9 | FS_INDEX: Reuse of tabs in the details view | 5.2R5 | 256 |
| 57.10 | Integrated preview: Updated third-party software | 5.2R7 | 256 |
| 57.11 | Jumping to References in Template Code | 5.2R9 | 258 |
| 57.12 | List view at folder level in the Media Store | 5.2R13 | 261 |
| 57.13 | Logging the Integrated Preview (Browser Engines) | 5.2R10 | 261 |
| 57.14 | Optimization of selection dialog | 5.2R5 | 262 |
| 57.15 | Optimized keyboard control for consideration of pages and sections in generation | 5.2R4 | 263 |
| 57.16 | Optimized keyboard control of CMS_INPUT_LIST | 5.2R4 | 264 |
| 57.17 | Optimizing code completion in templates | 5.2R2 | 265 |
| 57.18 | Repeating a search after erroneous input | 5.2R8 | 265 |
| 57.19 | Revised selection dialog and opening new workspaces | 5.2R4 | 266 |
| 57.20 | Revised version comparison | 5.2R2 | 267 |
| 57.21 | Selection of revisions for merge | 5.2R4 | 268 |
| 57.22 | Simplified Creation of Entries in FS_CATALOG | 5.2R4 | 270 |
| 57.23 | Workflows / Task list: Aborting workflows now requires project administrator privileges | 5.2R10 | 271 |
| 58 | System | | 272 |
| 58.1 | Integrated Software | 5.2R4 | 272 |
| 58.2 | Integrated Software | 5.2R3 | 273 |
| 58.3 | Integrated Software | 5.2R12 | 273 |
| 58.4 | Integrated Software | 5.2R19 | 273 |



| | | | |
|-----------|---|----------------|------------|
| 58.5 | Integrated Software | 5.2R20 | 273 |
| 58.6 | Integrated software | 5.2R14 | 274 |
| 58.7 | Signing with SHA-256 | 5.2.615, 5.2R7 | 274 |
| 58.8 | Update of libraries | 5.2R16 | 274 |
| 58.9 | Updated third-party software | 5.2R18 | 275 |
| 58.10 | Updating Apache FOP | 5.2R14 | 275 |
| 58.11 | Using Java 9 (EAP) | 5.2R18 | 275 |
| 58.12 | Using Jetty as a module (EAP) | 5.2R18 | 276 |
| 59 | Template Wizard | | 278 |
| 59.1 | Activate/deactivate crawling | 5.2R2 | 278 |
| 59.2 | Configure overview | 5.2R2 | 279 |
| 59.3 | Detecting and merging changes | 5.2R2 | 280 |
| 59.4 | Protection against simultaneous project editing | 5.2R2 | 280 |
| 60 | Deprecations | | 281 |
| 61 | Overview | | 282 |



1 Welcome to the Release Notes for FirstSpirit Version 5.2 Release 2!

5.2R2

These release notes contain an overview of all new functionality, improvements, and bugfixes in FirstSpirit Version 5.2 Release 2.

Release notes for FirstSpirit release versions (“R”) are generated using FirstSpirit. As of this new version, we are increasingly using datasets in order to profit from the more comfortable reuse and sortability of content. Furthermore, the use of datasets enables integration with the internal bug tracking database: this is another building block in the software-supported interlocking of work items and deliverables of the FirstSpirit Core Development, Quality Assurance, and Documentation groups.

The use of an additional FirstSpirit project in the development group that maintains and enhances FirstSpirit provides yet another valuable opportunity to test FirstSpirit in everyday use.

This document's header line indicates the FirstSpirit build to which these release notes apply: the bold number (in this edition of the document, “210”) indicates the build version which has officially been released for the FirstSpirit release version (“5.2 Release 2”). For better traceability, the header also lists all previously released build versions of the corresponding minor version line (in this edition of the document, “102”). The first digit of a three-digit build version number generally indicates the release version: build version numbers of the format “1xx” indicate Release 1, while build version numbers of the format “2xx” indicate Release 2.

The first chapters of these release notes contain descriptions of new features which are roughly grouped by target audience and include references to FirstSpirit documentation.

The chapter “Overview” provides a list of the new functionality which has been implemented in the current version as well as a table of bugfixes relevant to this version, categorized and sorted by their ID in the internal bug tracking system. The bugfix categories contain links to the third section of this document (“Categories”) which lists all bugfixes by category, again in tabular form. Here, you can quickly find changes made to the functionality groups that you find relevant. For easier navigation in the document, you can click on a bugfix ID in the “Categories” chapter to return to the overview.

Several IDs in the internal bug tracking system may be merged into one release notes comment (in this edition of the document, e.g. “175454” and “176337”) if several changes to one aspect of the software cause similar effects, or if several bugfixes share a common cause but each bugfix affects the software's behavior in a different way. If several bug reports share a common cause, bugfix measures are often



only applied using one ID in the internal bug tracking system but cover related bug report IDs as well. Related IDs are shown below the main ID.

2 Discontinuation of the proprietary installation packages for FirstSpirit version 5.2R5 5.2R4

Discontinuation of the proprietary installation packages for RPM Package Manager (.rpm) and Debian (.deb). The installation packages named above are no longer available from FirstSpirit version 5.2R5 onward.

Still supported are TGZ (for all Unix platforms) and EXE (for Windows).

In future, FirstSpirit will offer a standardized, platform-neutral update management system for all FirstSpirit servers. FirstSpirit ServerMonitoring already provided an update check for all FirstSpirit servers in the “Health Center” area of version 5.2R4. An additional update mechanism is planned from FirstSpirit 5.2R5 onward.

3 Notes concerning downgrades / upgrades 5.2R4

Usually, FirstSpirit versions are forward and backward compatible if only the number of the minor or build version changes. When upgrading to FirstSpirit version 5.2R4 or downgrading please take into account the following notices:

Upgrade

It is recommended for all FirstSpirit server updates to newly create all self-produced modules vis-a-vis the new FirstSpirit version. In addition to this, all the installed modules delivered by e-Spirit and all web applications should also always be updated. Especially, the protocol for FirstSpirit web applications has changed in FirstSpirit version 5.2R4 (see also chapter “Administration: Modified protocol for FirstSpirit web applications”).

Downgrade

FirstSpirit Servers can not be downgraded to FirstSpirit version 5.2R3 or older by means of an in-place downgrade because of the update of the integrated Apache Derby database. Error report after downgrade:




ERROR XSLAN: Database at [path] has an incompatible format with the current version of the software. The database was created by or upgraded by version 10.12.

Workaround: Export with FirstSpirit version 5.2R4 and import with FirstSpirit version 5.2R3.

See also chapter “System: Integrated Software”.

4 Documentation for FirstSpirit SiteArchitect: now available in HTML format, too 5.2R4

In addition to the Documentation for FirstSpirit ContentCreator, FirstSpirit Release-Notes and the FirstSpirit Online Documentation (ODFS), the Documentation for FirstSpirit SiteArchitect is now also created and managed by FirstSpirit. This means that FirstSpirit replaces Microsoft Word for the process of creating documentations. While the documentation has been available so far only in PDF format, it is now also available in HTML format (accessible from the ODFS). Up to now, approximately one half of the content of the documentation could be transferred to FirstSpirit. The result is published as beta version in FirstSpirit 5.2R4.

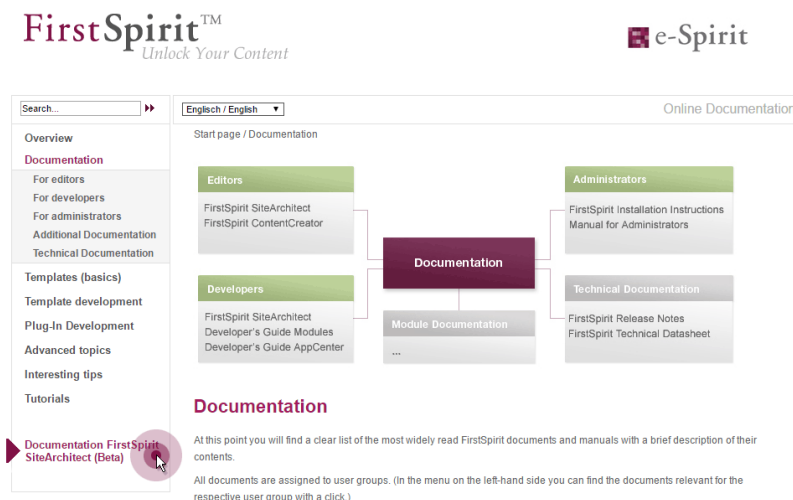

Advantages of FirstSpirit compared to conventional text processing programmes:

- simplified cooperation of editors
- all in one single place: structured, integrated storage of texts and pictures



- FirstSpirit standard functionality that facilitate editorial activities: for example integrated version history, integration of workflows, easy reuse of texts and media
- any additional functions required can be developed inhouse (for example Plug-in for project wide search and replace of text)
- PDF file at the push of a button
- system-supported translation process

Advantages for the customer:

- early internal testing of new FirstSpirit versions in productive use before official release
- links between the single documentations are possible (in the HTML edition, “FirstSpirit CorporateMedia” / Remote functionality)
- central search in all documentation is possible (in the HTML edition)

Review:

The **Documentation for developers** (the “ODFS”) is generated using FirstSpirit from the start. Publication medium: HTML. It can be accessed among other things from FirstSpirit SiteArchitect and constitutes an important part of the FirstSpirit documentation.

Since FirstSpirit 5.0 (09/2012) the **Documentation for ContentCreator** is created using FirstSpirit, too. Since then, it has been not only published in HTML but also in PDF format. The HTML edition can be accessed contextually from ContentCreator. In addition to the content pages, tooltips for icons and buttons in ContentCreator et al. are managed using this documentation project. Thus, we build another bridge between the core product and documentation.

The **Release Notes** for the release versions have been created using FirstSpirit for some time now, too (since FirstSpirit 4.0.25, 09/2007). The concerning project is closely connected with the internal build and bug tracking systems. Since FirstSpirit 5.2R2 the project works primarily with database content, for example in order to profit from the more comfortable reuse and sortability of content. Publication medium: PDF.



Outlook:

Further FirstSpirit documentation should be transferred to FirstSpirit in the future. Then it will be possible to establish more cross references, for increasing comprehensibility, redundancies are to be removed in return. Central management of the templates and distributing them into the single FirstSpirit projects by using external synchronization is envisaged.

5 New user interface for the trouble ticket system 5.2R5

The user interface of the trouble ticket system for the e-Spirit Technical Support has been greatly enhanced to provide better access to the most important information and functionality. Starting today you can, for example, find information about planned release dates of upcoming FirstSpirit versions and answers to frequently asked questions. Naturally, we will continuously update and extend the information available.

You can find the new Help Center at <https://help.e-spirit.com>. It replaces the previous address *helpdesk.e-spirit.com*.

In addition, please use help@e-spirit.com instead of the previous e-mail address *helpdesk@e-spirit.com*.


6 FirstSpirit HTML documentation 5.2R5

In addition to the Documentation for FirstSpirit ContentCreator, FirstSpirit Release Notes and the FirstSpirit Online Documentation (ODFS), the Documentation for FirstSpirit SiteArchitect and the “FirstSpirit Manual for Developers (Components)” are now also created and managed by FirstSpirit. This means that FirstSpirit replaces Microsoft Word for the process of creating documentations. While the documentation has been available so far only in PDF format, it is now also available as HTML edition.

- The complete HTML documentation for FirstSpirit SiteArchitect has left the beta stage and is now generally available. The migration process for this documentation is now complete, and it is now managed entirely within a FirstSpirit project.
- The HTML documentation “FirstSpirit Manual for Developers (Components)” is currently at beta stage: It is only available in German and is currently being revised.

The HTML documentation for FirstSpirit SiteArchitect and the “Manual for Developers (Components)” can be reached from the left navigation sidebar in *FirstSpirit Online Documentation* (“ODFS”):



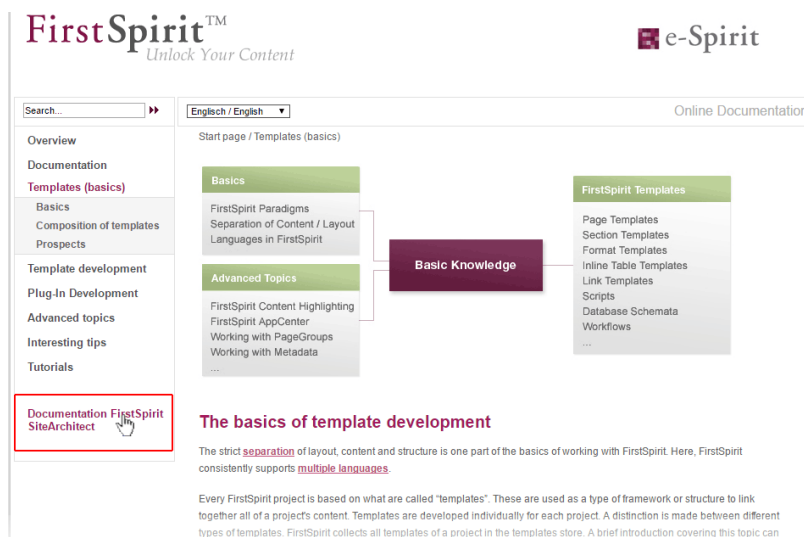

The HTML documentation for FirstSpirit SiteArchitect can also be reached via the menu “Help” (menu entry “User (SiteArchitect)”). Context-sensitive navigation from within SiteArchitect to the documentation can be achieved by pressing **F1** or by using the help button in the horizontal toolbar.

The PDF version of these documentations continues to be available via ODFS in the chapter “Documentation”. The PDF containing the documentation for FirstSpirit SiteArchitect as well as the HTML version are generated from the same FirstSpirit project.

The URLs of the HTML documentations have been modified in this context, too. Bookmarks to the FirstSpirit online documentation should, therefore, be adapted accordingly.

7 Code signing certificates 5.2R5

The content of FirstSpirit JAR files is signed with a certificate. This procedure is also called “code signing”. At all times, e-Spirit aims to use up-to-date certificates for all FirstSpirit components. Release Management ensures that customers who update FirstSpirit at least once a year always use a valid certificate.

Using older FirstSpirit versions with invalid certificates primarily affects the use of SiteArchitect and ServerManager: Depending on the configuration of the individual Java security options, the system may, at the very least, show security warnings.

In the current FirstSpirit version, the content is signed with a new certificate that is valid until 2018-06-13 (13 June 2018).



Overview of certificates currently used by FirstSpirit:

| FirstSpirit version (major line) | FirstSpirit version | valid until |
|----------------------------------|---------------------|-------------|
| 4.2 | up to 4.2.503 | 13.06.2016 |
| | from 4.2.504 | 21.05.2017 |
| | from 4.2.509 | 13.06.2018 |
| 5.0 | | 13.06.2016 |
| 5.1 | up to 5.1.502 | 13.06.2016 |
| | from 5.1.503 | 21.05.2017 |
| 5.2 | up to 5.2.501 | 21.05.2017 |
| | from 5.2.502 | 13.06.2018 |

Information for customers with “Deployment Rule Set”: If you are using a Deployment Rule Set, which allows you to centrally manage Java security settings and determine which applications are permitted to start in the browser, you should ensure that the rule set matches the certificate when a certificate is updated by e-Spirit.

8 System requirements 5.2R7

FirstSpirit aims to support the very latest browsers, databases, and operating systems. The following products and versions have been released for use with the current version of FirstSpirit.

Operating systems:

Reference operating system for the clients is now

- Microsoft Windows 10

Furthermore, in addition to Ubuntu 12.04 LTS, the latest FirstSpirit version also passively supports

- Ubuntu 16.04 LTS


as an operating system for both the FirstSpirit Server and the FirstSpirit Clients SiteArchitect and Server-Manager.

For more information, see the *FirstSpirit Technical Data Sheet*.



9 Incompatibilities with specific Java versions 5.2R7

FirstSpirit is always released for a main version of a JDK. For FirstSpirit version 5.2R7, for example, this is Oracle Java 7 and 8. JDK updates are regularly issued as part of JDK bug fixes. These updates are checked for compatibility with FirstSpirit as part of quality assurance. In very rare cases, bugs in the JDK that cannot be bypassed by programming may cause incompatibilities. These bugs are not related to FirstSpirit.

 Due to a bug that occurs when checking the signature of Jar files in older Java versions, Java **7u76** or higher must be used for FirstSpirit version 5.2R7 and above.

FirstSpirit SiteArchitect and ServerManager, for example, will not start with defective Java versions.

For more information on which Java versions can be used, see the *FirstSpirit Technical Data Sheet*.

10 Innovations concerning the FirstSpirit Release Management 5.2R12

e-Spirit develops software on the basis of a continuous improvement process. The aim is to develop functions in an agile and needs-based manner, to make them available to customers more quickly, and to continue elevating the quality of the software. This means that:

- New features and extensions are released immediately after development, testing, and documentation – irrespective of the version number.
- Wherever possible, large extensions are rolled out incrementally – even if a feature has not yet achieved its full intended range of functions, an initial version is released as soon as it provides a useful additional benefit (minimum viable product). Additional features and convenience functions are then gradually added in the following releases.
- There are no more big-bang releases. Releasing features immediately allows the software development output to be distributed evenly over time.


This approach affects our usual handling of FirstSpirit version updates and involves new best practices. For more information, please refer to [FirstSpirit Community](https://community.e-spirit.com/docs/DOC-2091) (<https://community.e-spirit.com/docs/DOC-2091>).



11 FirstSpirit Manual for Administrators 5.2R12

The “FirstSpirit Documentation for administrators” is now also created and managed by FirstSpirit. While the documentation has been available so far only in PDF format, it is now also available as HTML edition. The HTML edition is currently at beta stage: It is currently still being revised.

The HTML documentation can be reached from the left navigation sidebar in *FirstSpirit Online Documentation* (“ODFS”):

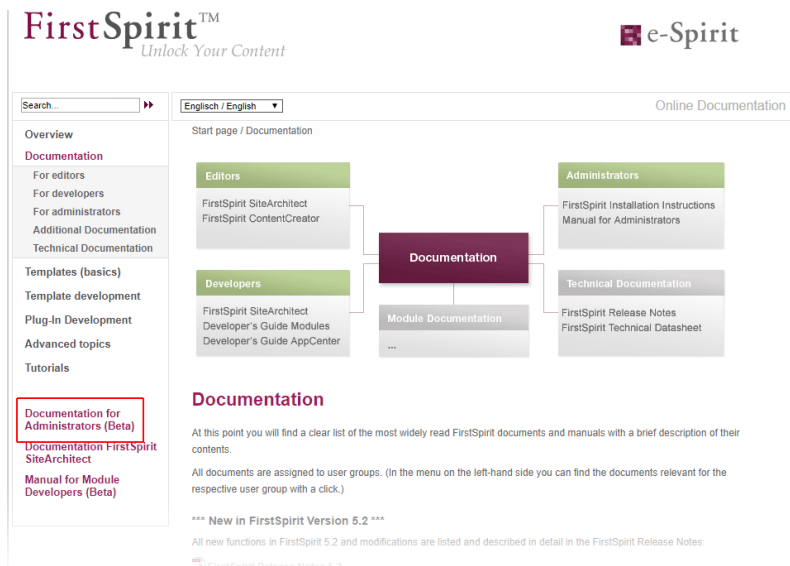

The PDF version of this documentation continues to be available via ODFS in the chapter “Documentation”, as well as from within SiteArchitect (menu “Help” (menu entry “Administrators”) and **F1**) or by using the help button in the horizontal toolbar).

12 Indexing of referenced datasets ("indexing.maxNoOfAssociations")

5.2R12

As of the current FirstSpirit version, it is possible to more precisely control indexing of referenced datasets.

The `indexing.maxNoOfAssociations` parameter will no longer be evaluated. If it is used in existing configurations, it should be removed from the configuration file `fs-server.conf` and replaced appro-



priately with the new parameters `indexing.relationshipPathLengthToFollow` and `index-Treatment`.

For a more detailed description of the new parameters please see Chapter “Controlling indexing of referenced datasets”.


13 Java support (Oracle Java 9) 5.2R13

FirstSpirit 5.2 is compatible with Oracle Java 7 and Oracle Java 8 (for information on restrictions and reference versions please see “FirstSpirit Technical Datasheet”).

Internal testing has shown that FirstSpirit is not compatible with Oracle Java 9, which will be officially released in September 2017. However it is intended to support Java 9 in the future.

14 Support for the distributed development of FirstSpirit projects (External Synchronization) 5.2R14

FirstSpirit projects are generally developed in a team. For distributed project development involving several team members, each team member works in their own local FirstSpirit development environment. The development processes operate at several workplaces (decentrally), at different times (asynchronously), and often at different development strands (nonlinearly). To support these projects successfully, adequate tools (such as version control systems, integrated development environments, etc.) need to be used.

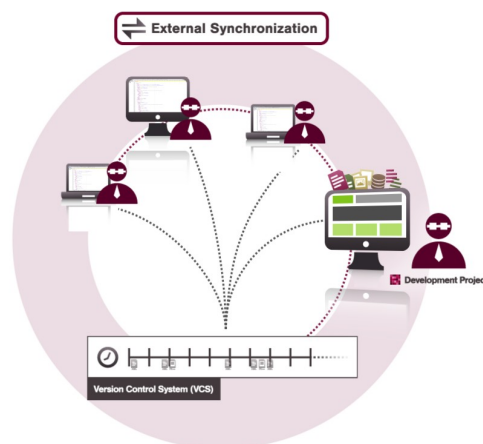

FirstSpirit External Synchronization supports these concepts by providing FirstSpirit objects in a format which allows developers to export templates (and other project content):

- from a FirstSpirit project into a file system structure with a folder hierarchy and
- to import modified content from the file system structure back into a FirstSpirit project.

This export/import functionality makes it possible to:

- edit FirstSpirit objects externally,
- version FirstSpirit objects via an external version control system.

Entry points for External Synchronization are the following interfaces:

- ImportOperation
- ExportOperation

(Package: `de.espirit.firstspirit.store.access.nexport.operations`)

We recommend performing all export and import actions using **FSDevTools**. This tool uses pre-defined commands to automatically import and export data between the FirstSpirit project and the file system. The interfaces therefore do not have to be implemented individually.

Source code and documentation for the compilation, use, and functional expansion of the “FSDevTools” command line tool are published and available to download at:

- <https://github.com/e-Spirit/FSDevTools>

Technical requirements, configuration and concrete examples are described in the documentation *Introduction* (→*Documentation “External Synchronization”*) (`.../help/odfs/edocs/sync/index.html`).

Compatibility with other FirstSpirit versions: Functionality for being able to export templates and other content from a FirstSpirit project into a file system structure with folder hierarchy and thus for being able editing these externally has been already introduced with FirstSpirit version 5.1.



This functionality has been extensively enhanced and revised with the current release. For example, the export format has been changed and API methods added.

Exports which were created in earlier FirstSpirit versions using the “External Synchronization” function can still be used. Relevant changes in software behavior are described in detail in Chapter 4.

! After a FirstSpirit version which still uses the old export format is upgraded or updated, the project in question must be fully exported so that the format changes take effect. The method `setDeleteObsoleteFiles` must be set to `true`. (This is the default setting when using FSDevTools.)

! Downgrading FirstSpirit versions which use the new export format (to versions which use the old export format) is not supported. In such cases, please contact e-Spirit directly.

15 FirstSpirit documentation in HTML format 5.2R14

The complete FirstSpirit HTML documentation for Administrators has left the beta stage and is now generally available. The migration process for this documentation is now complete, and it is now managed entirely within a FirstSpirit project.

Another new documentation is the one for the “FirstSpirit External Synchronization” functionality (see also Chapter 1. and 4.).

The HTML documentation can be reached from the left navigation sidebar in *FirstSpirit Online Documentation* (“ODFS”).

The HTML documentation for Administrators can also be reached via the menu “Help” (menu entry “Administrators”). Context-sensitive navigation from within SiteArchitect to the documentation can be achieved by pressing **F1** or by using the help button in the horizontal toolbar. The PDF version of these documentation continues to be available via ODFS in the chapter “Documentation”.

16 Oracle Java 9 5.2R14

FirstSpirit 5.2 is supported when used with Oracle Java 7 or Oracle Java 8 (for limitations and reference versions, see “FirstSpirit Technical Data Sheet”). Internal tests have shown that FirstSpirit is not yet



functional when used with Oracle Java 9. However, it is planned that FirstSpirit will be compatible with Java 9 in the future.

Currently, starting a FirstSpirit server or FirstSpirit clients on Java 9 will be prevented. A message will be logged:

```
Running FirstSpirit using Java 9 or newer is not yet supported! Your version: 9
```

17 Support of Oracle Java 5.2R15

Generally, FirstSpirit is released for use with a major version of a JDK, e.g. Oracle Java 8 (JDK 1.8). FirstSpirit 5.2 is currently released for use with Oracle Java 7 and Oracle Java 8.

Support of Oracle Java 9 is currently in development. Release of this support is planned for the near future.

After a transitional period, during which Oracle Java 7, 8, and 9 will be supported in parallel, support for Oracle Java 7 will end: as of summer 2018, FirstSpirit will no longer support Oracle Java 7. This means that FirstSpirit will no longer be operable under Oracle Java 7, and e-Spirit AG will no longer take measures to resolve errors or problems that are related to Java 7.

Modules which are currently being developed by e-Spirit (e.g. "FirstSpirit Third Party Preview") are already optimized for Java 8 and are not operable under Oracle Java 7.

Oracle has ceased to provide public updates of Java 7 in 2015 and recommends that developers and end users upgrade to Java 8 in order to continue to receive publicly accessible updates and security improvements.

18 FirstSpirit Third Party Preview (TPP) 5.2R16

To enable content that originates from external applications ("apps") rather than being generated directly from FirstSpirit to still be displayed and used in FirstSpirit, "FirstSpirit Third Party Preview" (TPP for short) can be used. This displays the content from the external app in FirstSpirit ContentCreator. Content that is maintained in FirstSpirit (editorial content) can also be displayed and edited there. In contrast to conventional FirstSpirit projects, individual items of content can (depending on the project design) be edited and released independently of each other (by different editors), even if they are displayed on a (HTML) page. TPP allows also previewing content deriving from FirstSpirit CaaS.



To enable the functionality to be used,

- the FirstSpirit module `fs-tp-[version].fsm` is required,
- a corresponding preview URL must be stored in the project properties (area “ContentCreator settings”).

This module is currently in ramp-up stage. If you are interested, please contact your e-Spirit customer representative.

For more information please see also

- “FirstSpirit Third Party Preview” documentation
- FirstSpirit documentation “Content as a Service”
- FirstSpirit Manual for editors (ContentCreator)


19 Advance notice: Rebrush for FirstSpirit components 5.2R16

The graphics of the FirstSpirit start page, FirstSpirit ContentCreator, and FirstSpirit SiteArchitect are currently being revised. They will feature a more modern design, but their proven user prompting and guidance will be preserved. Release of the new design is planned for FirstSpirit version 5.2R17.


20 Rebrush for FirstSpirit graphical user interfaces 5.2R17

With the new FirstSpirit version comes a fresh design in a familiar software environment. A modern color scheme and style enhances the User Experience (UX) for editors and paves the way for upcoming FirstSpirit extensions.




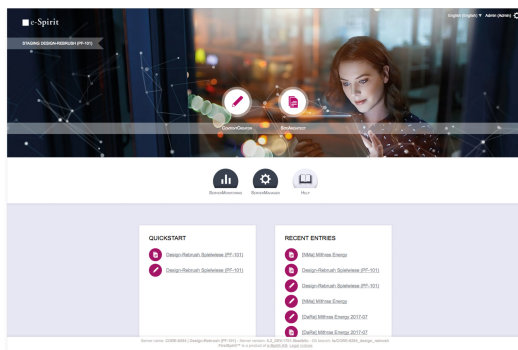

Homepage

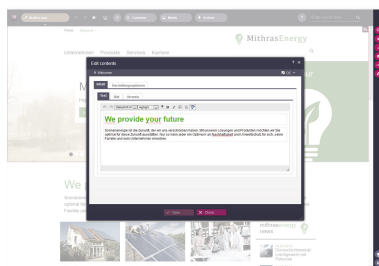

ContentCreator

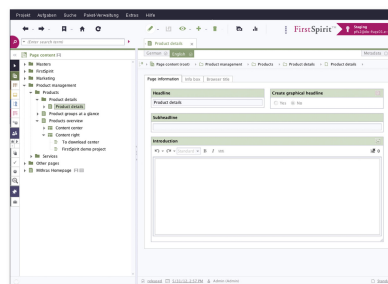

SiteArchitect

With the new FirstSpirit upgrade, editors, developers and administrators see “their” FirstSpirit revitalised. The most striking change: the new FirstSpirit start screen. The tiles for selecting clients UIs are replaced by new icons - editorial and administrative tools are visually more distinguished from each other. Large visual elements and micro-animations shape the first impression.

SiteArchitect and ContentCreator have also undergone changes to the look and feel: A unified, modernized color palette with contrasting, fresh tones gives the FirstSpirit tools a harmonized design. The color spectrum shifts from classic software gray with low-saturation colors to a modern blue-gray with glowing accents. Buttons and icons are rounder in many places, and the toolbar is even more clearly arranged.

The design update does not involve any functional changes for editors or developers. All functions are still available in familiar places. Also, it drives no additional effort for developers and operations.

As of the current FirstSpirit version, the design overhaul is not yet completed and will be pursued over future releases.

Documentation will be revised incrementally. Thus, screenshots in documentation may not yet reflect the current design.



Note about customer-specific modules and plugins: controls which are added to the graphical user interfaces of FirstSpirit SiteArchitect and/or ContentCreator by way of customer-specific plugin implementations and modules should be adjusted as needed to fit the new design.

21 Database schemata: New system column 5.2R17

Within the scope of a new feature, a new system column named

```
FS_META_DATA
```

has been introduced to database schemata.

In **newly created** database schemata or tables, this column is automatically created.

In **already existent** database schemata, this column will be created in tables as soon as the respective schema is updated, i.e. the schema is modified and saved. Alternatively, the context menu item “Edit externally” may be used on the respective schema; either closing the dialog “Externally edited elements” via “Apply changes and close” or a sequence of clicking “Apply changes” and closing the dialog will cause the column to be created in the schema. During a project import into a FirstSpirit server, the column will also be added automatically.

For further information, see chapter 5.2, “FS_INDEX: Manually Sorting Datasets”.

22 Changes regarding AccessControlDb / ACL in FirstSpirit 5.2R16 / 5.2R17 5.2R17

While preparing for a new backend technology we moved the internal class `AccessControlDb` from the package `de.espirit.firstspirit.acl.db` with FirstSpirit version 5.2R16. After discussing this change with our customers and partners we decided to rollback this change with FirstSpirit version 5.2R17 to restore the behaviour from before FirstSpirit version 5.2R16.

If you have not yet refactored your code to use the new interface you do not need to do anything and existing implementations will continue to work with FirstSpirit version 5.2R17 (but will not work with FirstSpirit version 5.2R16). If you already did the refactoring, please rollback your changes to use the old classpath. It is unfortunately not possible to be compatible with both versions.



Regarding Downgrades: If you are using this functionality and want to downgrade after an update to FirstSpirit version 5.2R17 manual intervention is needed.

Further details can be found in our Community at <https://community.e-spirit.com/community/customer/blog/2017/12/19/info-changes-in-52r16-regarding-accesscontroldb-acl>.

If you have questions regarding this, please let us know by contacting our Technical Support team at <https://help.e-spirit.com>.

23 FirstSpirit product update 2018 5.2R18

In keeping with its best-of-breed strategy, FirstSpirit uses a range of software components that are provided by third-party vendors. For security reasons, and to stay abreast of the latest developments in each type of technology, the ways in which these software components are used in FirstSpirit undergo regular updates.

In today's approach to product development, updates are being provided with increasing frequency and the length of time for which "older" versions can rely on support is becoming shorter and shorter.

As a result of this, it is becoming inevitable that customers will need to switch to a newer software version more frequently. It is also important to address the fact that individual third-party components are becoming dependent on one another in more and more ways. Oracle Java is a system that many components rely on, for example, but there are some third-party components that are not available in a version compatible with Oracle Java 9.

Here at e-Spirit, we are setting a challenge for ourselves. To ensure that using third-party components with FirstSpirit achieves the same levels of accuracy and quality that are achieved with the core product itself, we are investing a great deal of time and consideration in implementing and organizing processes, and performing quality control measures for them. e-Spirit is committed to making it as easy as possible for customers to update to new FirstSpirit releases at any time, and offers support during the process of rolling out new functions. However, it will not be possible to rule out the need for some outlay in this project altogether. 2018 will be a year characterized by a handful of new features in the area of third-party components integrated into FirstSpirit. In order for customers to benefit from these features, they will need to take certain actions.

As is the case with the FirstSpirit core, the use of third-party components will be subject to intensive quality assurance processes consisting of both manual tests and software-supported, automated tests, and incorporating the experiences gained from using the components in production applications in-house at e-Spirit. With such a multitude of operating systems being supported, as well as Java versions, inter-



faces with third-party components, and the various possibilities for combining and configuring all these systems, the test environment will naturally be extremely complex. Consequently, there will remain a certain degree of probability that the QA activities will not be able to identify and resolve every single problem in advance.

With this in mind, e-Spirit wishes to emphasize that it is relying on customers to assist it in this process: Some new features will be provided to customers in an early development stadium as part of an Early Access Program (“EAP”). In this context, the status “EAP” means that the functionality is not yet in the state “General Availability” (GA). With e-Spirit’s agile approach, new features are being developed in small increments and provided to customers successively in order to reduce potential problems and susceptibility to errors as well as to be able to react in a timely manner to customer feedback. Thus, EAP features will very likely be augmented with further functionality in later versions. Features in EAP state have already been subjected to extensive quality assurance, however, due to the test complexity described above, may still show problems when used on production systems. Generally, features in EAP state are mature enough to be put to use by customers. They should, however, be initially used on testing systems, and e-Spirit should be notified of potential problems. Customer feedback is expressly requested.

24 Oracle Berkeley DB 7 5.2R18

Oracle Berkeley DB is used in FirstSpirit as a repository for saving content data. Until now, versions 3 and 5 have been in use and running reliably and stably for many years. However, in order to benefit from performance advantages, to remain at the forefront of technical development, and last but not least, for security reasons, plans are in place to update the internal Berkeley DB to version 7 in the near future.

FirstSpirit uses Berkeley DB firstly for the repositories of individual projects (“project repositories”) and secondly to save system data (“internal repositories”, e.g., registry, archiving database, Access Control Database). Both points of use are affected by the update to version 7 and must be handled accordingly on existing FirstSpirit servers: From a technical point of view, the data saved in the Berkeley DBs has to be converted to the new data format. This normally takes just a few seconds.

From FirstSpirit version 5.2R19 (March 2018, planned), a conversion tool will be available, which will enable all data saved in the Berkeley DBs to be conveniently converted via command line to existing FirstSpirit servers in just a few commands. As server-level data also has to be converted, a conversion of this nature can only be performed when the FirstSpirit Server is offline in order to prevent any loss of data. A conversion will generally be completed in a short time. Only in exceptional cases may it take up to several hours; for example, in the event of very large and/or numerous projects. To make it easier for customers to calculate appropriate maintenance windows, plans are underway to publish comparison



values relating to project size and conversion duration in future release notes. These values will have been established from conversions that have already been performed in production conditions.

FirstSpirit version 5.2R18 already allows individual project repositories to be converted to version 7, under the early access program (“EAP”, see chapter “Oracle Berkeley DB 7”). This function can be used to gather experience on the conversion process. Should problems unexpectedly be encountered when using Berkeley 7, these should be reported to e-Spirit immediately to enable them to be resolved before the official release of Berkeley 7.

A conversion can generally be completed in just a few seconds. It is also possible to convert data back to an older Berkeley version; however, this takes much longer and requires additional disk space.

Berkeley 7 is not compatible with Java 7. The FirstSpirit Server therefore requires at least Java 8 in order to use Berkeley 7.

Compatibility of FirstSpirit versions

An official release of Berkeley version 7 is intended for the time frame between FirstSpirit version 5.2R19 and R21 (March to May 2018). Following a transitional period, during which Berkeley versions 3, 5, and 7 will be able to be used in parallel on FirstSpirit servers, it is planned – for reasons relating to maintainability – to only offer version 7 and to withdraw support for versions 3 and 5 from around the end of 2018. After this point in time, FirstSpirit servers which are still running version 3 and/or 5 will then no longer start. Consequently, a server-wide switch to version 7 must be completed by this date. Switching from version 3 or 5 to 7 at the earliest possible opportunity is therefore recommended.

Following a conversion to Berkeley version 7, a FirstSpirit downgrade to versions earlier than version 5.2R18 will no longer be possible. However, downgrading to FirstSpirit versions above 5.2.R18 will be possible. For a downgrade, the file `fs-berkeleydb7.fsm` should be manually deleted from the `../data/modules` sub-directory.

When switching from FirstSpirit version 5.2R17 or earlier to FirstSpirit version 5.2R27 or later, a conversion using the conversion tool must be completed beforehand.

25 Oracle Java 5.2R18

FirstSpirit 5.2 is currently released for use with Oracle Java 7 and Oracle Java 8.

Work on Oracle Java 9 support capability is currently underway, with the release planned for the near future.

Following a transitional period during which Oracle Java 7, 8, and 9 will be supported in parallel with each other, support for Java 7 will expire: From summer 2018, FirstSpirit will no longer support Oracle



Java 7. This means that FirstSpirit will no longer be able to run with Oracle Java 7 and e-Spirit AG will no longer implement any measures designed to eliminate errors or problems associated with Java 7. Modules currently being developed by e-Spirit for the first time (e.g., “FirstSpirit Third Party Preview”) are already optimized for Java 8 and no longer compatible with Oracle Java 7.

Not least because it is in the customers’ interest, FirstSpirit preferably supports Long-Term Support versions. For development activities that have dependencies to Java, e-Spirit regards Oracle’s release plan. Oracle itself has not provided any public updates for Java 7 since 2015 and recommends that developers and end users transition to Java 8 in order to continue receiving public updates and security enhancements. In the medium term, the aim is to provide FirstSpirit support for Java 10 or 11, since Java 9 is not a long-term support version (for more information, see <http://www.oracle.com/technetwork/java/eol-135779.html>).

From FirstSpirit version 5.2R18, support for Java 9 (for FirstSpirit Server and Clients) will be part of the early access program (“EAP”). Using existing FirstSpirit installations with Java 9 will require slight changes to configuration files in the file system

Due to the extended security checks in Java 9, the use of this Java version will lead to slowdown, especially during client start-up and during the first execution of functionality that is dynamically downloaded by the client.

If Java 9 is being used, a corresponding message is logged when the Server is started.

In cases where Oracle Java 9 is being used, it is important to note that some functions in FirstSpirit are based on third-party software. However, not all vendors of third-party software have converted it in order to ensure compatibility with Java 9. Consequently, functions that are based on third-party software of this kind will not be available if FirstSpirit is being operated with Oracle Java 9. See also Chapter “Using Java 9 (EAP)”.

26 Eclipse Jetty 5.2R18

“Eclipse Jetty”, the open-source product integrated in FirstSpirit, is used to provide a web server and a JSP/servlet engine that run as part of the FirstSpirit Server in the same VM. This integrated web server is only intended to be used for test purposes, so that customers can use FirstSpirit directly with web server functions and do not need to install and connect an external web server beforehand. In productive operation, and especially in operational scenarios that require a more complex configuration, a web server of an Apache Tomcat type, for example, should be used and integrated into FirstSpirit.



An integrated Jetty web server in version 9.2 is currently being used in FirstSpirit. This version is no longer receiving support from the manufacturer, which means that it no longer provides security patches; additionally, it is not compatible with Oracle Java 9. For these reasons, switching to a more recent Jetty version is essential. In the future, Jetty will be made available as a module so that it is less reliant on implementation by the manufacturer, and so that it is easier to provide support for the functions within FirstSpirit.

Jetty has already been released as a module (`fs-jetty.fsm`) in FirstSpirit version 5.2R13. Due to the isolated class loading in “isolated mode”, the amount of potential library conflicts in customer-specific web applications is noticeably reduced in this mode. Thus, the Jetty module is especially suitable for use with FirstSpirit servers that operate in “isolated mode”.

As of FirstSpirit version 5.2R18, this module can also be used with FirstSpirit servers that are not operated in “isolated mode” but in “legacy mode”. For usage in “legacy mode” it is part of the early access program (“EAP”). This module bases on the most recent version: 9.4. However, this version is not compatible with Java 7 and requires at least Java 8.

Both the earlier implementation “InternalJetty” and the new implementation as a module run within the same JavaVM as the FirstSpirit server. This configuration is not suitable for production operation and should only be used for tests. For more complex configuration requirements (e.g. adjustment of memory size, timeouts, number of threads per deployed application, ...), use of an external web server (e.g. Tomcat) is recommended.


The functions of the integrated Jetty server will be discontinued with FirstSpirit version 5.2R18, and are scheduled to cease existing at all in August 2018 (FirstSpirit version 5.2R24). In the meantime, the currently integrated Jetty functions as well as Jetty as a module will be available in parallel with one another. During this period, it will be possible to test out the module and convert the operation of existing FirstSpirit installations that use Jetty to the Jetty module.

For more information please see Chapter “Using Jetty as a module (EAP)”.

27 Browser integration 5.2R18

Special software is used for the “integrated preview” function in FirstSpirit SiteArchitect; this is integrated in SiteArchitect and is based on the browser being used in each case (Mozilla Firefox, Microsoft Internet Explorer or Google Chrome).



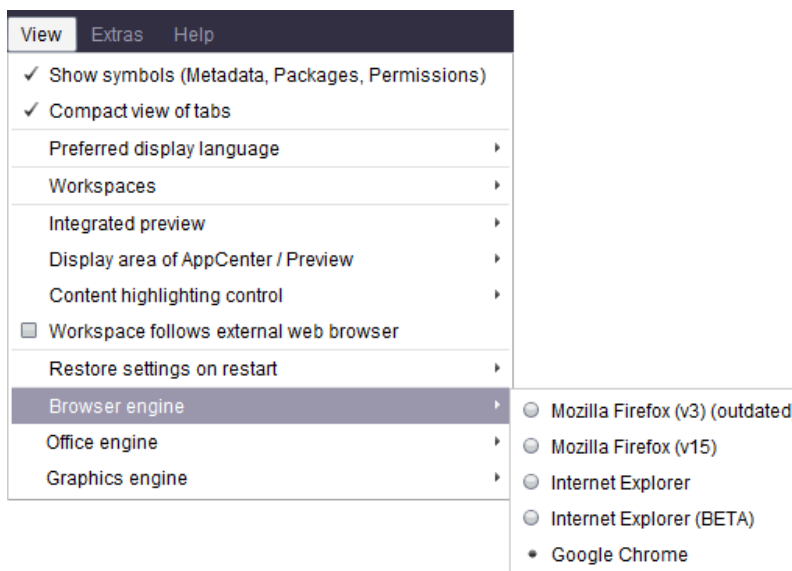

Microsoft and Mozilla are no longer developing their respective products (Internet Explorer or Firefox). The most recent version of Mozilla “Quantum” and Microsoft Edge as well unfortunately lack the interfaces required for embedding the browser into FirstSpirit. The versions of Firefox that are currently being used in FirstSpirit do not provide any support for Java 9. Firefox as a browser engine for the integrated preview function will therefore be discontinued as of FirstSpirit version 5.2R18.

The versions of Internet Explorer that are currently used in FirstSpirit also provide no support for Java 9. The plan is to provide support for Microsoft Edge in the future, both in order to operate Content-Creator and in order to use the integrated preview function in SiteArchitect. Until this time, it will be possible to continue using Internet Explorer for the integrated preview function with Java 8. Support for the current “Internet Explorer” version will expire and, as such, will be discontinued in advance of May 2018 (FirstSpirit version 5.2R21). As a replacement, the previous BETA variant (“Internet Explorer (BETA)”) will be released and will then be called “Internet Explorer”.

28 FirstSpirit product update 2018 5.2R19

The following sections outline the latest developments relating to relevant third party components being used in FirstSpirit or to support Oracle Java.



29 Oracle Berkeley DB 5.2R19

Oracle Berkeley DB is used in FirstSpirit as a repository for saving content data. Until now, versions 3 and 5 have been in use and running reliably and stably for many years. However, in order to benefit from performance advantages, to remain at the forefront of technical development, and last but not least, for security reasons, plans are in place to update the internal Berkeley DB to version 7 in the near future.

FirstSpirit uses Berkeley DB on the one hand for the repositories for the individual projects (“project repositories”), as well as for storing system data (“internal repositories”, for example registry, archiving database, access control database). Both places where these are used are affected by an update to version 7 and must be handled accordingly on existing FirstSpirit servers: from a technical point of view, to do this the data stored in the Berkeley DBs must be converted into the new data format. This is normally carried out in a few seconds.

Since FirstSpirit version 5.2R18, individual project repositories can also be converted to version 7 as part of the Early Access Program (“EAP”).

FirstSpirit version 5.2R19 provides a conversion tool (also as part of the Early Access Program (“EAP”)), that can be used for the simple conversion of all data stored in existing FirstSpirit servers with just a few commands (“project repositories” and “internal repositories”). For more details, see the “Conversion of the Oracle Berkeley DB (EAP)” chapter.

Berkeley 7 is not compatible with Java 7. The FirstSpirit Server therefore requires at least Java 8 in order to use Berkeley 7.

Compatibility of FirstSpirit versions

An official release of Berkeley version 7 is intended for FirstSpirit version 5.2R20 or R21 (April/May 2018). Following a transitional period, during which Berkeley versions 3, 5, and 7 will be able to be used in parallel on FirstSpirit servers, it is planned – for reasons relating to maintainability – to only offer version 7 and to withdraw support for versions 3 and 5 from around the end of 2018. After this point in time, FirstSpirit servers which are still running version 3 and/or 5 will then no longer start. Consequently, a server-wide switch to version 7 must be completed by this date. Switching from version 3 or 5 to 7 at the earliest possible opportunity is therefore recommended.

Following a conversion to Berkeley version 7, a FirstSpirit downgrade to versions earlier than version 5.2R18 will no longer be possible. A downgrade to FirstSpirit version 5.2R18 is possible, however.

For downgrading servers which have not been converted yet, the file `fs-berkeleydb7.fsm` should be manually deleted from the `../data/modules` sub-directory.



30 Oracle Java 5.2R19

Release Plan for Oracle 9, 10 and 11

FirstSpirit is currently released for use with Oracle Java 7 and Oracle Java 8.

Since FirstSpirit version 5.2R18 (February 2018), Oracle Java 9 is supported as part of the Early Access Program (EAP). Work is currently in progress on support for Oracle Java 10 (in accordance with the new version scheme: 18.3); at present FirstSpirit does not run on Oracle Java 10 however.

In the interest of the customer, FirstSpirit supports Long-Term-Support (LTS) versions as a priority. In the case of Oracle Java, it is planned to support at least the current Java version and the last LTS version up to the end of public updates for Oracle (“End of Public Updates”). Variants that do not have LTS status will no longer be officially supported by FirstSpirit following the end of public updates. This means that for these versions, no further tests on compatibility with FirstSpirit and no measures to resolve any problems arising will be undertaken. For the Java Release Plan from Oracle, see also <http://www.oracle.com/technetwork/java/eol-135779.html>.

Summary of the currently supported Java versions (as at March 2018):

- Java 8 (last LTS version)
- Java 9 ((EAP), current Java version)
- In addition, Java 7

The next LTS version is Oracle Java 11 (18.9 LTS), which is set to be released in September 2018 by Oracle. For FirstSpirit, support for this version is planned from the third quarter of 2018. Version 8 will be supported by FirstSpirit up to the end of Oracle public support (at least January 2019).

FirstSpirit and Oracle Java 9+

The use of Oracle Java 9 with FirstSpirit is currently still in EAP status (Early Access Program). A prompt release is sought, but some minor problems have arisen in the use of Java 9 in test operation. These will soon be rectified in coming releases.

The move to the use of Java 9 (both at e-Spirit and with customers) is central, as on the one hand the difference from Java 8 is relatively great from a technical point of view, but on the other hand Java 9 has only be supported by Oracle since very recently. The move from Java 9 to Java 10 and 11 is likely to have fewer implications from a technical standpoint, however, meaning the change from Java 9 to Java



10 or 11 will not be as involved. Problems arising when using Java 9 will very likely also occur with a change from Java 8 to Java 10 or 11.


In general, features in EAP status will already have reached a level of maturity where it can and should be used by customers. However, it should initially be used on test systems and potential problems notified to e-Spirit promptly. Customer feedback is actively encouraged.

The following technical restrictions are currently known relating to the use of Oracle Java 9 (and higher where applicable):

- The third-party component used in FirstSpirit, **Beanshell**, is not yet fully compatible with Java 9. This means that some Beanshell scripts run with errors in FirstSpirit with Java 9. This is currently considered by e-Spirit to be preventing for the approval of Java 9. As soon as a Beanshell update is available, it will undergo intensive testing with a view to reassessment for approval (we suspect that Java 10 will have been released by then).

Current workaround:

The problem can be circumvented in Microsoft Windows making the parameter setting `--illegal-access=warn` in the Java Control Panel (“Start / Configure Java”) for the corresponding Java version (“Desktop settings” tab):

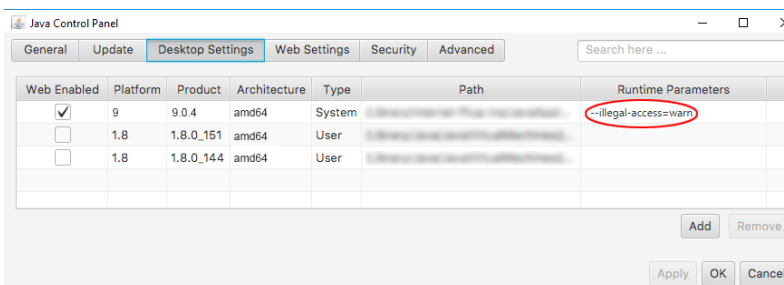


(Note: Multiple parameters can be specified separately using a semicolon.)

- Oracle does not offer Java 9 in more than one **32 bit** variant, i.e. when using Oracle Java 9, FirstSpirit can now only be run on 64 bit platforms or with 64 bit applications. The option to run FirstSpirit under 32 bit will be discontinued in the medium-term.
- Due to advanced security checks in Java 9, **delays** arise when using this Java version, in particular on launching on the client side and when first running functionalities that have been loaded afterwards.



- The **Windows Installer** cannot be used under Java 9. If a new FirstSpirit Windows Server is to be operated under Java 9, an installation should first be carried out using the Windows Installer under Java 8 and then a migration to Java 9 carried out (for more details, see FirstSpirit Release Notes on version 5.2R18).
- The Oracle Java Runtime Environment (**JRE**) that is required to launch the FirstSpirit SiteArchitect, is potentially not compatible between versions 8 and 9. A change from Java 9 back to 8 requires a number of manual configuration modifications. In Windows, the FirstSpirit Launcher permits a simpler change back to Java 8.
- The “Keep temporary files on my computer” option for Java Web Start must be selected under Oracle Java 9 so that FirstSpirit SiteArchitect and FirstSpirit ServerManager can be launched. Under Oracle Java 8 this could also be deselected. Therefore, we recommend checking this setting when changing to Oracle Java 9 (tab “Web settings / Settings for temporary files”).

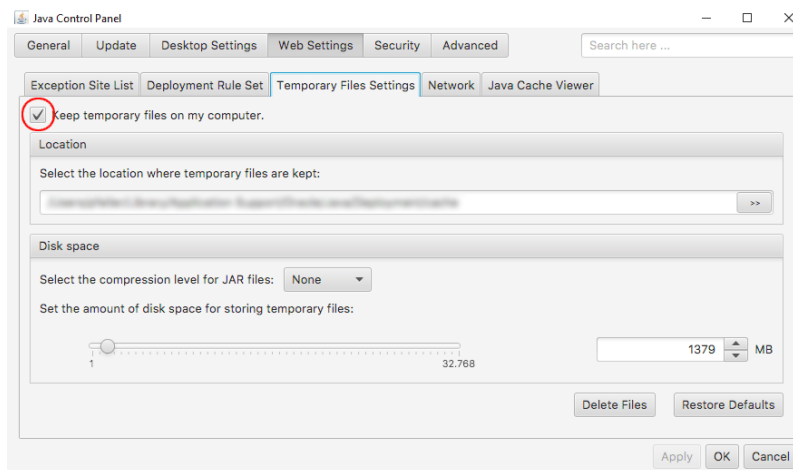


- The parameters of the wrapper files `fs-wrapper-j#.include.conf` cannot be edited like the default wrapper file `fs-wrapper.conf` via the **FirstSpirit ServerMonitoring**. However, the file can be edited in the file system.
- It is not currently possible to copy any text from the integrated preview in the FirstSpirit SiteArchitect using a keyboard shortcut `Ctrl + C`. Alternatively, the context menu in the integrated preview can be used.
- Operating system-specific **third party applications** in the AppCenter of the FirstSpirit SiteArchitect will no longer be supported from Oracle Java 9 (exception: the browser integration).



- The Jetty web server integrated into FirstSpirit will not run under Oracle Java 9. The “fs-jetty.fsm” (EAP) module can be used instead.

31 FirstSpirit Content Experience Tools (Start of EAP phase) 5.2R20

The “Early Access Program (EAP)” phase for FragmentCreator starts with the release of the current FirstSpirit version.

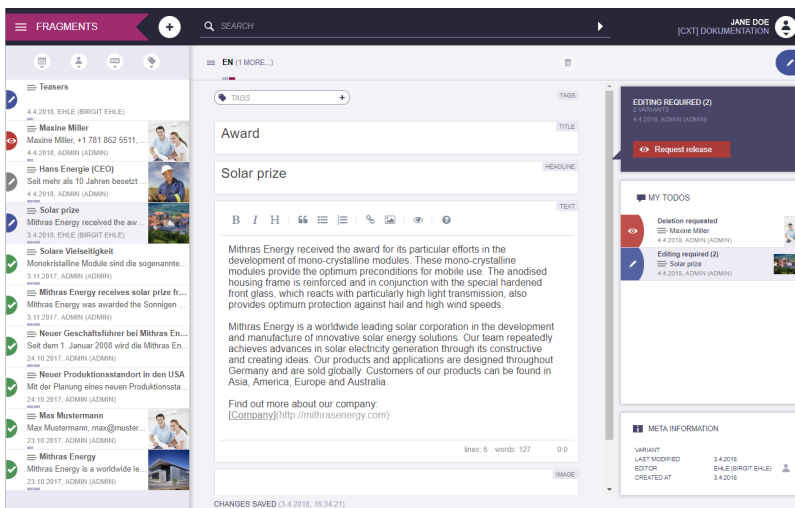

What is FragmentCreator?

FragmentCreator is the first e-Spirit “Content Experience Tools (CXT) client” which is designed from the ground up to meet the specific requirements of content creation and distribution. From an editorial point of view, FragmentCreator is a web application that is perfectly adapted for the creation and editing of format-neutral fragments.

Which problems can be solved by the FragmentCreator?

SiteArchitect and ContentCreator are designed for editing content so that it fits a particular context and publishing that content from FirstSpirit into previously defined channels (push strategy), e.g., a website (desktop or mobile).

In new concepts, such as FirstSpirit CaaS (Content-as-a-Service), content is stored in format-neutral fragments so that it can be easily accessed by any front end via a universal interface (pull strategy). By employing this strategy, the content's reach expands to all digital platforms, devices, and distribution



channels that can be accessed via an interface. The ultimate aim of this is the furthest possible distribution of content.

What are fragments?

Fragments are small, self-contained units of content, such as a product description, a press release, contact details, etc.. Media can also be used in a fragment.

Because they are all self-contained, fragments can be created, managed, tagged, and published (e.g., using FirstSpirit CaaS) independently of any context. Once created, these fragments can be used in a wide range of scenarios.

Fragments and variants – what’s the difference?

The CXT concept is based on the assumption that variants of fragments are required in many applications. This means that the content or message is identical, but the form is different. For example, variants of a fragment can differ in terms of scope, level of detail, or language (simple vs. complex).

So by using variants, content can be created for publication or release for various audiences, different output devices, a range of campaign durations, etc. The content variant for a mobile output device, for example, will tend to be shorter and more compact than that for a desktop computer.

Variants can be edited and released independently of one another.

Examples of variants:

- Language-dependent content, e.g., written in “German” and “English”
- Information used in learning materials for different levels, e.g., “beginner” and “advanced”
- Different forms of marketing content, e.g., for A/B testing
- Different scopes for different output devices

Do I need a license for FragmentCreator?

For partners, FragmentCreator does not require a license. Customers will also not need one as long as they have licensed FirstSpirit CaaS.



Information on the EAP phase:

In the EAP phase, the FragmentCreator is to be tested in real customer scenarios. Where are the opportunities for optimization? Which functionalities are still required? Where do problems occur?

The FragmentCreator probably does not yet meet your usual requirements for stability and reliability. For this reason, participants in the EAP phase are supported by e-Spirit staff during commissioning and will receive help quickly whenever any questions or problems arise.

FragmentCreator, the CXT platform, and the related documentation will be augmented and extended during the EAP phase.

Please do not hesitate to contact us if you have a suitable use case! Please contact Technical Support (for partners) or your account manager (for customers).

32 Use of Oracle Java 9 and 10 5.2R20

As of FirstSpirit version 5.2R20, Oracle Java 9 is officially approved for use with FirstSpirit. All problems in the use of FirstSpirit with Java 9 which could thus far be identified could be successfully corrected by e-Spirit.

However, on a technical level, the difference between Java 8 and Java 9+ is quite large (e.g. related to memory management) such that an update of existing FirstSpirit installations to Java 9 presents several challenges, e.g. related to RAM requirements and GC parameters. Thus, e-Spirit emphatically recommends that a Java update from Java 8 to 9+ is initially done on test or QA systems in order to obtain experience with any given concrete usage scenario. Problems and errors which arise from the use of Java 9+ should in all cases be forwarded to e-Spirit in a timely manner.

For all production systems, e-Spirit recommends use of Oracle Java 8 for the time being. Here, it is important to note, however, that Oracle plans to cease support for Java 8 in early 2019 such that planning/evaluation of a migration to Java 9+ will become necessary in the foreseeable future in any case.

The first released version of Oracle Java 10 has meanwhile been published (20-Mar-2018). e-Spirit has already tested this version and has made the necessary adjustments in FirstSpirit in FirstSpirit version 5.2R20. However, there is still little practical experience concerning the operation, and the internal tests and quality assurance activities are still ongoing. Nevertheless, Java 10 receives the status “EAP” (early access program) already with FirstSpirit version 5.2R20. This means, that FirstSpirit (server as well as



clients) can be operated with Java 10, but should first be used only with testing and QA environments, and not at all in productive environments. The restrictions known relating to the use of Java 9 apply also to Java 10.

FirstSpirit support for Oracle Java 11 is planned from the third quarter of 2018 onwards. This version is the next LTS version from Oracle and publication is scheduled for September 2018. Currently, FirstSpirit is not yet functional when used with Oracle Java 11.

Java 8 will be supported by FirstSpirit up to the end of Oracle public support (at least January 2019).

Restrictions

The following technical restrictions are currently known relating to the use of Oracle Java 9 (and higher where applicable) that cannot be bypassed by programming:

- Oracle does not offer Java 9 and higher in more than one 32 bit variant, i.e. when using Oracle Java 9 and higher, FirstSpirit can now only be run on 64 bit platforms or with 64 bit applications.
- Due to advanced security checks in Java 9 and higher, delays arise, in particular on launching on the client side and when first running functionalities that have been loaded afterwards.
- The Oracle Java Runtime Environment (JRE) that is required to launch the FirstSpirit SiteArchitect, is potentially not compatible between versions 8 and 9+. In Windows, the FirstSpirit Launcher permits a simpler change back to Java 8.
- Some functions in FirstSpirit are based on third-party software. Not all vendors of third-party software have converted it in order to ensure compatibility with Java 9 and higher. Consequently, functions that are based on third-party software of this kind will not be available if FirstSpirit is being operated with Oracle Java 9+. Operating system-specific third party applications in the AppCenter of the FirstSpirit SiteArchitect will no longer be supported from Oracle Java 9 (exception: the browser integration).

Installation / Upgrade from Java 8

Using **existing FirstSpirit installations** with Java 9 and higher will require slight changes to configuration files in the file system.

1. First, perform an inplace upgrade of the desired FirstSpirit server (for non-Windows systems see *FirstSpirit Installation instruction*, Chapter “Via a tar archive”, for Windows systems see



Chapter “Updating via the installation program”). In this way, the start script will be updated automatically (`fs5` for Linux, `fs5.cmd` for Windows).

2. Replace the file `fs-wrapper.conf` (or for servers running in “Isolated mode” the file `fs-wrapper.isolated.conf`) in the FirstSpirit subdirectory `~\conf` by the content of the file `fs-wrapper.conf.default.txt` (or by the content of the file `fs-wrapper.isolated.conf.default.txt`) in the subdirectory `~\conf\conf-all` and adopt individual changes which you have made in the file `fs-wrapper.conf`.

If you would like to use FirstSpirit with Java 9 or higher as Windows service, please change the line

```
#include.required ../conf/fs-wrapper-j1.include.conf
```

in the file `fs-wrapper.conf` or `fs-wrapper.isolated.conf` to

```
#include.required ../conf/fs-wrapper-j2.include.conf
```

New installations do not require a change of the above mentioned files.

Installation under Microsoft Windows

For installation under Windows, please install first a FirstSpirit server with Java 8 as described in the *FirstSpirit Installation instruction*, Chapter “Installation under Windows”. Under Oracle Java 9 and higher, FirstSpirit can not be installed using the Windows installation program `firstspirit-setup-<version number>.exe` or `firstspirit-isolated-setup-<version number>.exe`.

Then the path to the desired Java version (the parameter `wrapper.java.command`) must be entered in the file `fs-wrapper.conf` or `fs-wrapper.isolated.conf` and other parameters should be adjusted in order to meet the relevant requirements in each case.

In addition, in the file `fs-wrapper.conf` or `fs-wrapper.isolated.conf`, the line

```
#include.required ../conf/fs-wrapper-j1.include.conf
```


must be changed to

```
#include.required ../conf/fs-wrapper-j2.include.conf
```



Notes about using Java 9 and higher

- Under Java 9 and higher, it is again possible to use the third-party component integrated in FirstSpirit, “Beanshell”, and to copy text from the integrated preview in the FirstSpirit SiteArchitect using the keyboard shortcut **Ctrl + C** as of FirstSpirit version 5.2R20, without the need to set the parameter `--illegal-access=warn` within the Java Control Panel. If other restrictions or problems should arise with using Java 9 and higher, which are not mentioned in the section “Restrictions” below, or in the following, please contact the Technical Support.
- The parameters of the wrapper files `fs-wrapper-j#.include.conf` cannot be edited like the default wrapper file `fs-wrapper.conf` via the FirstSpirit ServerMonitoring. However, the file can be edited in the file system.
- The Jetty web server integrated into FirstSpirit will not run under Oracle Java 9 or higher. The `fs-jetty.fsm` module (EAP) can be used instead.
- The “Keep temporary files on my computer” option for Java Web Start must be selected under Oracle Java 9+ so that FirstSpirit SiteArchitect and FirstSpirit ServerManager can be launched. Under Oracle Java 8 this could also be deselected. Therefore, we recommend checking this setting when changing to Oracle Java 9 or higher (tab “Web settings / Temporary Files Settings”):

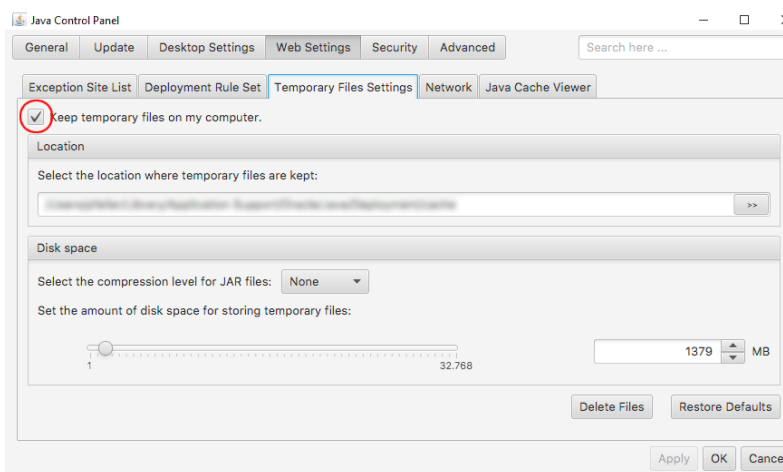

Notes about downgrading

Oracle Java 9 and higher differs in terms of their encryption options or their default encryption from Oracle Java 8. Switching a JDK is then problematic (e.g., from Oracle Java 9 to Oracle Java 8) if the repository



was encrypted with a method that is not supported by the target JDK. Once the JDK has been switched, the project will then not launch. However, this can be resolved by changing the `java.security` under “[JRE_home]/lib/security/”.

For more information, please see <http://www.oracle.com/technetwork/java/javase/8u151-relnotes-3850493.html>.

33 Oracle Berkeley DB 7: Optimizations and tips on conversion time

5.2R20

Since the conversion tool “BerkeleyUtil”, introduced in FirstSpirit version 5.2R19 could now be used in several production environments we were able to collect data on the conversion time. With this data the conversion process could be optimized in FirstSpirit version 5.2R20, and optimized configuration could significantly reduce the conversion time for some Berkeley configurations. It became evident that the amount of memory accessible for the conversion tool is most relevant for the conversion time, while the rest of the hardware being used is less important.

Since the FirstSpirit server can't be active during the conversion we recommend allocating as much memory to the conversion tool as the server would normally use.

To do this, when starting the tool with

```
java -jar <FirstSpiritROOT>/bin/BerkeleyUtil.jar
```

you can pass the value # stored in `fs-wrapper.conf` (or `fs-wrapper.isolated.conf`, respectively) for `wrapper.java.maxmemory` as the value to `-Xmx#m`.

Example:

fs-wrapper.conf:

```
...  
wrapper.java.maxmemory=4000  
...
```

The call should then be:



```
java -jar -Xmx4000m <FirstSpiritROOT>/bin/BerkeleyUtil.jar -c <FirstSpiritROOT>
```

Another parameter, to reduce server downtime, is converting projects individually. On a running server projects can be converted via the ServerManager (Project properties, area “Repository”, drop-down “Backend”). The project being converted can not be used, but the others stay usable. The additional load while converting can have an impact on the server performance (comparable to a full generation of the respective project).

Tip: It is also possible to convert only some projects on the running server, and the rest later via the conversion tool. Projects already converted to Berkeley 7 will not be converted again when later performing a full server conversion with the conversion tool.

Lastly it is possible to convert repository databases with the “fast” option (-f). This is about 20 to 100 times faster than the “normal” conversion via dump/restore. But using this option errors have been observed, leading to an irreversibly damaged project, when projects already contained errors in their older Berkeley databases.

Because of this risk we recommend not using this option, when no current system backup is available. The risk when using this option can be minimized by validating projects before starting the conversion. This validation can be executed on a running FirstSpirit server. The results should be taken with a grain of salt, though, since new errors could be introduced in files already checked, or errors could be reported due to changes in progress while checking.

In any case a recent backup is recommended before converting the repository, whether using the “fast” option, or using just “normal” conversion.

Examples for conversion times

Big FirstSpirit server:

- more than 100 projects
- FirstSpirit directory > 1 TB, containing > 500 GB in Berkeley DB directories (without “blob” directories)
- contains one very big project (“bdb” directory > 250 GB)

Conversion time with 20 GB memory: < 12 hours



Conversion time with 4 GB memory: > 24 hours

Medium-size FirstSpirit server:

- 27 projects
- FirstSpirit directory < 1 TB, including > 250 GB in Berkeley DB directories (without “blob” directories)
- contains one big project (“bdb” directory > 50 GB)

Conversion time with 4 GB memory: < 6 hours

Medium-size FirstSpirit server:

- 27 projects
- FirstSpirit directory < 100 GB, including < 50 GB in Berkeley DB directories (without “blob” directories)
- “bdb” directory of the biggest project is about 25 GB

Conversion time with 20 GB memory: < 2 hours

Fast conversion of the same server: < 8 minutes

The list above distinguishes between the FirstSpirit server's “bdb” and “blob” directories because these are treated differently:

If a project is using Berkeley version 5, its “blob” directory is not modified during conversion. If the project is using Berkeley version 3, files from the “blob” directory are moved into new sub-directories, which does not affect conversion time.

The content of the “bdb” directories is exported to new files, though, unless you are using the `-f` option, and then imported to a newly created database.

Note: The given values are just reference values, because FirstSpirit setups differ substantially from customer to customer. A FirstSpirit server's conversion time depends very much upon number and size of projects, and upon the customer specific usage.

See also Chapter “Conversion of the Oracle Berkeley DB (EAP)”.



34 Microsoft Edge Support 5.2R20

As of the current version of FirstSpirit, Microsoft Edge may be officially used for work with FirstSpirit ContentCreator.

35 Administration / Modules

35.1 HTTPS Support for the Module "Eclipse Jetty" (EAP) 5.2R19

With FirstSpirit version 5.2R13 the new module providing the servlet container Eclipse Jetty has been introduced. Support for servers running in legacy mode was added with 5.2R18 in context of the Early Access Program. In order to ease the migration from using the internal Jetty server to using the Jetty module, the current version of FirstSpirit adds support for encrypted connections (HTTPS).

Creating encrypted connections requires a keystore in JKS format. This can be uploaded using the configuration dialog of the JettyService ("FirstSpirit ServerManager / Server Properties / Modules / FirstSpirit Jetty Server / JettyService").

Configuration

Enable unencrypted port (HTTP)
HTTP Port: 8090


Enable encrypted port (HTTPS)
HTTPS Port: 8443
Keystore: No keystore available
Keystore password:

Upload
Validate

OK Cancel

After uploading the keystore and entering the corresponding password, a click on the button "Validate" checks the entered configuration. When successful, the number of detected aliases is displayed.



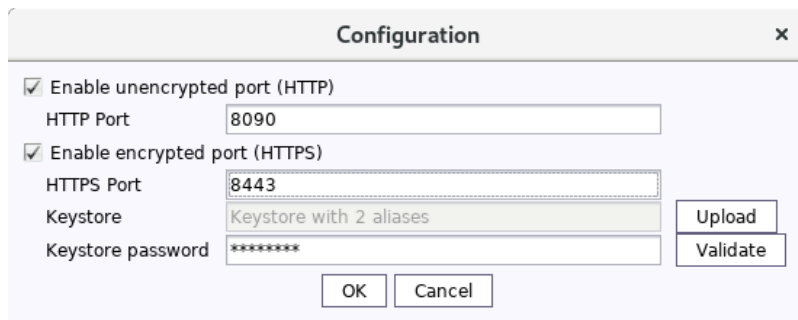

A restart of the JettyService is required in order to apply the new configuration.

35.2 Log in via Kerberos ticket "KerberosLoginModule" 5.2R2

To log into FirstSpirit via the Kerberos login module (module name: `de.espirit.firstspirit.server.authentication.KerberosLoginModule`), a Kerberos ticket is accepted, which is passed from the web browser to the FirstSpirit Server.

The `sendAccepted` parameter can be used to influence the HTTP status code in the case of a handshake. If the handshake is successful, "OK" (200) is sent with FirstSpirit version 5.2R2. "ACCEPTED" (202) was sent prior to FirstSpirit version 5.2R2. Depending on the infrastructure in use, this status (202) may not be accepted as "valid", something which may cause indexing problems, for example. This default behavior has therefore been changed as of 5.2R2. It is possible to restore the old behavior by setting the parameter `sendAccepted` to the value `true` (file `fs-jaas.conf`, default value: `false`).

For more information, see

- *FirstSpirit Manual for Administrators*, chapter "Kerberos ticket (integrated Windows login)"
- Module documentation for *FirstSpirit Dynamic Personalization*, chapter "'Kerberos Login' login module"



36 Administration


36.1 Apache Tomcat / Java Servlet Specification 3.0: Disabling Pluggability features 5.2.611, 5.2R7

“Pluggability” features were introduced with version 3.0 of the Java Servlet Specification. These enable the `web.xml` modularization or the configuration of components via Java annotations. However, the latter function requires that all classes must be scanned for annotations when the web application is deployed (and implicitly each time the application server is started). As this process can take a long time, FirstSpirit can disable pluggability features globally or for individual web applications starting with the current FirstSpirit version.

Global configuration is carried out in the server configuration via the `WEBAPP_ENABLE_PLUGGABILITY_FEATURES_DEFAULT` parameter within the file `fs-server.conf`. Possible values are:


- `true`: Pluggability features are activated, Java classes are scanned for annotations during deployment. This is the default value.
- `false`: Pluggability features are deactivated, Java classes are not scanned.

Configuration for individual web applications is carried out via the “Pluggability” selection field, either for the global web applications (FirstSpirit ServerManager, “Server properties / Web applications”)

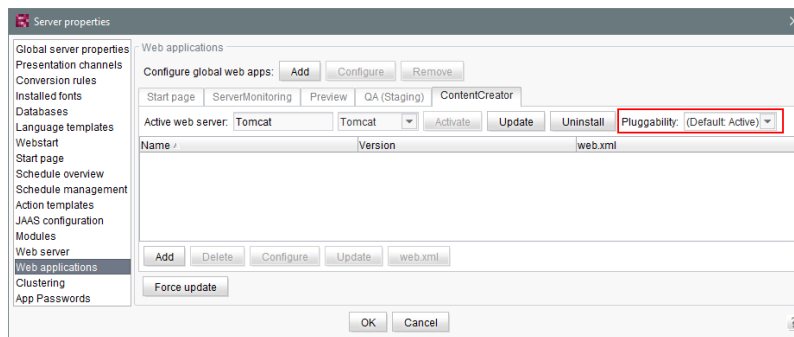

or for the web components of a project (FirstSpirit ServerManager, “Project properties / Web components”)



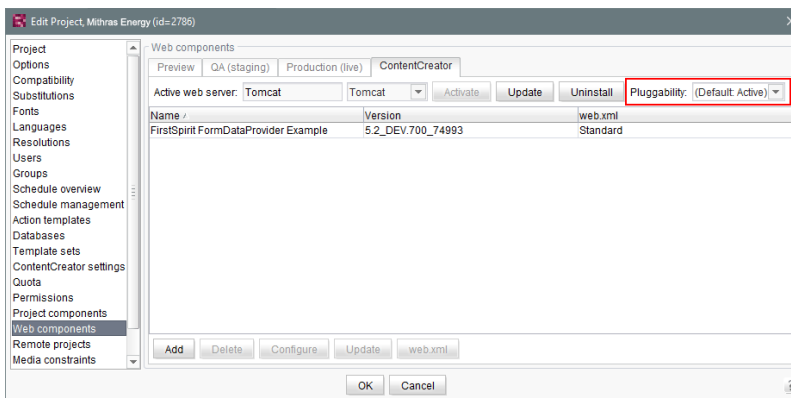

For more information please see *FirstSpirit Manual for Administrators*,

- Chapter “Area: Web Applications”
- Chapter “Configuring web applications”
- Chapter “Web components”

and the official page about the [Java Servlet 3.0 Specification](#).

! If the pluggability features are deactivated manually within the `web.xml`, for example by specifying an `<absolute-ordering>` element, and if the pluggability features have been **deactivated** by means of the new functionality which is described here, this can lead to conflicts. In this case, please remove the manual configuration (from the `web.xml`) or change the pluggability setting of the respective web application/s to “active” using the above described possibilities.

36.2 Archiving: Tagged revisions are now partly taken into account 5.2R13

Some FirstSpirit actions automatically generate tags for revisions (e.g., generation, content transport). Such tags can also be generated via API (`createTag` method in the `Project` interface, `de.espirit.firstspirit.access.project` package, FirstSpirit Access API).

Revisions with these tags have previously not been taken into account during archiving. In the current FirstSpirit version, revisions and tags whose tag name ends with the suffix “Task” are now archived, e.g., revisions and tags created automatically during generation or other Scheduler entries. This archived data can be deleted at a later date, in order to free up memory space and therefore increase the performance of the FirstSpirit Server.



36.3 Automatic deletion of files from local user directories 5.2R15

For various functionality of FirstSpirit SiteArchitect and FirstSpirit ServerManager, files are stored in the user home directory of the user's computer, specifically in a directory with the prefix `.firstspirit_` (e.g. `C:\Users\<<USERNAME>\.firstspirit_5.2R15\...`). With every FirstSpirit update, new files are potentially added.

As of the current FirstSpirit version, during every start of SiteArchitect or ServerManager, all `.firstspirit_*` directories in which no files were changed over the last 30 days will now be deleted in order to free storage space on the workstation.

For more information see *FirstSpirit Manual for Administrators*, Chapter “FirstSpirit Server configuration / Roll-out process for native applications”.

36.4 Caching of preview files 5.2.615, 5.2R7

When a preview is requested, the previewed page may be cached such that, at a later time, further preview requests for this page may be displayed more quickly.

Multi Perspective Preview (MPP) allows previews of pages as they would look at future dates. These previews were previously also cached by default. As of the current FirstSpirit version, caching of these future previews may now be deactivated globally as needed.

Configuration of this caching behavior is carried out in the configuration file `fs-server.conf` using the new parameter `preview.enableTemporalPreviewCache`:

- `true`: Preview pages will be cached. This potentially creates many files, enabling previews for previously viewed pages to load faster. (Default value)
- `false`: Preview pages will **not** be cached. This causes all relevant files to be created anew upon a preview request. This potentially causes more load but creates fewer files in the cache directory.

Use of `true` is recommended if editors are able to request previews for pages as they would look at future dates via the MPP timeline.



Until now, due to the previous caching implementation, it was possible that previews of pages representing future states were not always up-to-date or correct. This erroneous behavior was also corrected in this context.

For further information about MPP, see

- *FirstSpirit SiteArchitect / FirstSpirit AppCenter / Integrated preview / Multi Perspective Preview* (→*Documentation FirstSpirit SiteArchitect*)
- *Template development / JavaScript APIs / Multi Perspective Preview* (→*FirstSpirit Online Documentation*)

For further information about the new parameter `preview.enableTemporalPreviewCache`, see *FirstSpirit Manual for Administrators*, chapter “Area: Preview”.

36.5 Changed standard configuration of session cookies for new installations 5.2R5

FirstSpirit uses several standard web applications (fs5root, fs5webedit, fs5webmon, fs5preview, fs5staging) as well as optional, project-local web applications (fs5webedit_PROJECTID and fs5preview_PROJECTID).

The optional parameter `servletSessionCookieName` in the file `fs-server.conf` may be used to define a FirstSpirit-specific session cookie name for all web applications (see *FirstSpirit Manual for Administrators*).

In the past, this parameter was not specified with a preset value. If no value is defined for `servletSessionCookieName`, the cookie name specified by the WebApp server will automatically be used, in most cases, JSESSIONID.

Previous standard configuration:



```
# Servlet engine session cookie name.
# If left empty the servlet engine default is used (JSESSIONID in most cases).
# servletSessionCookieName=FS${FS_MAJOR}${FS_MINOR}SESSIONID
servletSessionCookieName=
# Servlet engine session cookie name for a specific webapp context path.
# 'ROOT' is the reserved name for the root webapp context path.
# servletSessionCookieName.ROOT=FS${FS_MAJOR}${FS_MINOR}ROOTID
# servletSessionCookieName.fs5webmon=FS${FS_MAJOR}${FS_MINOR}WEBMONID
# servletSessionCookieName.webappContextPath=FS${FS_MAJOR}${FS_MINOR}WEBAPPXYID
```

As of FirstSpirit version 5.2R5, the standard configuration of the parameters `servletSessionCookieName` (cookie name for all web applications) and `servletSessionCookieName.ROOT` (cookie name for the root application) will be as follows:

```
# Servlet engine session cookie name.
servletSessionCookieName=FS${FS_MAJOR}${FS_MINOR}SESSIONID
# Servlet engine session cookie name for root webapp context path.
servletSessionCookieName.ROOT=FS${FS_MAJOR}${FS_MINOR}ROOTID
```

This changed behavior only affects new installations. For existing installations of FirstSpirit, the previous configuration will be preserved.

36.6 Configuration of session cookies (fs-server.conf) 5.2.426, 5.2R5

Within the FirstSpirit web applications (fs5root, fs5webedit, fs5webmon, fs5preview, fs5staging), unified session cookies can be used. In conjunction with an application server or a firewall (operated on the application server), additional session cookies can be set, e.g. for authentication purposes. The names of these additional session cookies must be made known to FirstSpirit via the parameter `clientCookieNames`. During start of SiteArchitect or ServerManager, FirstSpirit passes the cookies defined in this parameter via the Java Web Start file (`FirstSpirit.jnlp`) or the FirstSpirit Launcher (`FirstSpirit.it.fslnch`) downloaded on the client side. The cookies will also be passed to the browser engine used in the project and thus will be available for use in the integrated preview in SiteArchitect. The same cookie will be used in three distinct session contexts (web browser: HTTP client, SiteArchitect: client/server communications, SiteArchitect: integrated browser engine).

As of the current FirstSpirit version, the configuration file “fs-server.conf” now allows optional configuration of specific values for these non-FirstSpirit session cookies. The new attributes can define values



for domain, path, and the secure flag of the session cookie. This is necessary when the corresponding values cannot be read directly from these non-FirstSpirit session cookies.

`clientCookie.{cookieName}.domain`: Specifies the domain used for the session cookie. If no value is given, the cookie will carry the URL from which the client was started (including the host name).

`clientCookie.{cookieName}.path`: Specifies the path of the session cookie. Default value: /

`clientCookie.{cookieName}.secure`: The secure flag limits the transmission of the session cookie. If the value is `true`, the cookie will only be sent to the server if communication takes place via HTTPS (if the URL meets the domain and path requirements). If the value is `false`, the cookie will be sent in both HTTP and HTTPS communications.

Example (`fs-server.conf`):

```
clientCookieNames=cookieName1
clientCookie.cookieName1.domain=* .domain.com
clientCookie.cookieName1.path=/
clientCookie.cookieName1.secure=true
```

36.7 Conversion of the Oracle Berkeley DB (EAP) 5.2R19

The latest version of FirstSpirit provides a conversion tool (currently still the Early Access Program (“EAP”)) that can be used for the simple conversion of all data stored in Berkeley DBs on existing FirstSpirit servers to Berkeley DB 7 format by entering just a few commands in the command line (“project repositories” and “internal repositories”). The exact procedure is described in the section “Recommended procedure for a conversion to Berkeley DB 7”. As server-level data also has to be converted, a conversion of this nature can only be performed when the FirstSpirit Server is offline in order to prevent any loss of data. A conversion will generally be completed in a short time. Only in exceptional cases may it take up to several hours; for example, in the event of very large and/or numerous projects. To make it easier for customers to calculate appropriate maintenance windows, plans are underway to publish comparison values relating to project size and conversion duration in future release notes. These values will have been established from conversions that have already been performed in production conditions.

Berkeley 7 is not compatible with Java 7. The FirstSpirit Server therefore requires at least Java 8 in order to use Berkeley 7.



Compatibility of FirstSpirit versions

An official release of Berkeley version 7 is intended for FirstSpirit version 5.2R20 or R21 (April/May 2018). Following a transitional period, during which Berkeley versions 3, 5, and 7 will be able to be used in parallel on FirstSpirit servers, it is planned – for reasons relating to maintainability – to only offer version 7 and to withdraw support for versions 3 and 5 from around the end of 2018. After this point in time, FirstSpirit servers which are still running version 3 and/or 5 will then no longer start. Consequently, a server-wide switch to version 7 must be completed by this date. Switching from version 3 or 5 to 7 at the earliest possible opportunity is therefore recommended.

Following a conversion to Berkeley version 7, a FirstSpirit downgrade to versions earlier than version 5.2R18 will no longer be possible. A downgrade to FirstSpirit version 5.2R18 is possible, however. After a downgrade, the file `fs-berkeleydb7.fsm` should be manually deleted from the `../data/modules` sub-directory.

Using the conversion tool

The “BerkeleyUtil” conversion tool is a command line tool that can be used to convert all data from the project repositories and internal repositories of a FirstSpirit server to Berkeley DB 7 format. The tool is contained in the `fs-server.jar` file and is rolled out to the “bin” directory when the server is started.

Prerequisites:

- Oracle Java: min. version 8
- The tool is only permitted to be used once the corresponding FirstSpirit server has been powered down.
- Sufficient memory space: Three times the memory space of the biggest database that is being converted will potentially be required temporarily.

Call and options:

```
java -jar BerkeleyUtil.jar COMMAND [OPTION]... PATH
```

First -jar must be used to specify the path under which the `BerkeleyUtil.jar` file is located on the FirstSpirit server, by default in the “bin” directory, e.g.

```
java -jar firstspirit/bin/BerkeleyUtil.jar
```



The following commands can be used for the `COMMAND` placeholder:

- `-c, --convert`: converts all uses below the specified directory (see `PATH` below) to Berkeley DB version 7 (complete FirstSpirit server)
 - `--convert-acl`: converts all ACL databases to Berkeley DB 7
 - `--convert-project`: converts all project repositories to Berkeley DB 7
 - `--convert-server`: converts all internal repositories to Berkeley DB 7
- `-d, --dump`: repairs the desired repository as a copy (standard mode I)
- `-h, --help`: display of the help
- `-l, --list`: lists the names, version, and path of all repositories on the server
- `-r, --recover`: attempts to restore the desired repository (standard mode II)
- `-R, --RECOVER`: attempts to restore the desired repository (with advanced error corrections)
- `-t, --verify`: checks the desired repository

The commands cannot be combined, i.e. each command requires a separate call.

Important: The commands `-d`, `-r` or `-R` should only be used following a prior analysis. Please contact Technical Support for support issues.

The following `OPTION` can be used:

`--dump-dir <directory>`: For the conversion or recovery of a repository, a copy is first created that is then imported. This call can be used to specify a directory in which the temporary copy is to be created.

`PATH` must be used to specify the path to the directory to be taken into account by the tool, e.g.

- to the root directory of the FirstSpirit server: `/firstspirit`
- to a directory of a Berkeley DB on the FirstSpirit server, e.g. `/firstspirit/data/projects/project_123/repository` (repository of a project), `/firstspirit/data/projects/project_123/registry` (registry of a project)



Example call:

```
java -jar firstspirit/bin/BerkeleyUtil.jar -l firstspirit
```

This call lists all Berkeley databases of the FirstSpirit server installed in the “firstspirit” directory and displays its versions.

Recommended procedure for a conversion to Berkeley DB 7

1) It is recommended to test the conversion to version 7 for one (small test) project first which uses the Berkeley DB in version 5, via switching the version in FirstSpirit ServerManager in the project settings, “Repository” section, “Backend” dropdown list. When the conversion was successful (= the project can be opened and edited in FirstSpirit SiteArchitect), you can proceed with step 2).

2) The FirstSpirit server must be powered down for a conversion via the conversion tool. For this reason, a conversion should be carried out during a maintenance interval.

3) Migrate the entire FirstSpirit server to version 7.

To do this, run the following example call (modified to the path of the root directory of the FirstSpirit server):

```
java -jar -Xmx#m firstspirit/bin/BerkeleyUtil.jar -c /firstspirit
```

The conversion process should be started with sufficient memory. As a rule of thumb, `-Xmx#m` should be used with the same value as defined for the `wrapper.java.maxmemory` for the FirstSpirit server (see *FirstSpirit Manual for Administrators*).

Important: The conversion process can take some time depending on the size and number of the repositories present on the FirstSpirit server (a maximum of a few hours). The conversion should not be canceled during this time as this could cause data loss and inconsistencies! In the event of canceling the process there is no rollback, and manual intervention will be required. Please contact Technical Support.

4) If the conversion was completed successfully, a corresponding message is output in the log, e.g.

```
<timestamp> [INFO Bdb7Convert] BerkeleyDB version 7 conversion successful,  
marker file written: firstspirit/data/server/berkeleydb.7
```



5) The following parameter must be entered in the `fs-wrapper.conf` file:

```
-DBerkeleyDB7=1
```

6) The FirstSpirit server can then be started and used as normal.

Troubleshooting

If a conversion is not completed successfully, a corresponding message is output in the log, e.g.,

```
<timestamp> [WARN Bdb7Convert] BerkeleyDB version 7 marker file not written,  
1 errors during the conversion process.
```

In this case, running the conversion again can resolve the issue.

If this is not successful, please contact Technical Support. The same applies if a conversion process had to be canceled. Message in the log on server start:

```
FATAL <timestamp> (de.espirit.firstspirit.server.ServerManagerImpl):  
Incomplete BerkeleyDB version 7 conversion detected
```

For assistance from Technical Support, please have the log file from the last execution of the conversion tool to hand.

36.8 Conversion of the Oracle Berkeley DB (EAP) 5.2R20

Various improvements have been made to the conversion tool `BerkeleyUtil.jar` provided with FirstSpirit version 5.2R19. This tool can be used for the simple conversion of all data stored in Berkeley DBs on existing FirstSpirit servers to Berkeley DB 7 format by entering just a few commands in the command line, and it is still in “EAP” state (early access program).

New parameters and modifications:

- The command `-l` (`--list`) now defines the size, in addition to the name, path, and version of all repositories on the server.
- The option `-v` (`--verbose`) can now be used to output additional logs, such as the stacktrace for error messages.



- The `-f` (`--fast`) option allows faster in-place conversion of project repositories. However, this should only be done if there is an up-to-date backup, since in rare cases existing problems in a repository can lead to it being irreparably damaged during a conversion. By default, a copy of the repository to be converted is created first, but when the option `-f` is used this copy is not created. Although it is more secure, the process of copying requires a little more time and temporary memory space. It also optimizes the repository to be converted so that it no longer contains unnecessary data.

Furthermore, write access from `BerkeleyUtil.jar` is now for security reasons only possible if the corresponding database is not opened for writing by another process.

Note: Conversion via `BerkeleyUtil.jar` should be performed on Unix systems by that user for which the FirstSpirit-Server was installed.

36.9 Encryption of passwords in FirstSpirit configuration files 5.2R16

Passwords in FirstSpirit configuration files can now be encrypted.

For further information, see *FirstSpirit Manual for Administrators*, chapter “FirstSpirit Server configuration / Configuration files (FirstSpirit Server) / FirstSpirit Server (`fs-server.conf`) / Password encryption”.

Note about downgrade ability: Passwords which have been encrypted with this new functionality cannot be used with FirstSpirit versions lower than 5.2R16. If a downgrade should be performed, the passwords must be decrypted prior to the downgrade. If the configuration references a key file, it must be present on the FirstSpirit server.

36.10 Expired license warning 5.2R2

A license is required to operate a FirstSpirit Server. This can be found in the form of a file with the name `fs-license.conf` and it contains information including the temporal validity of the license (`license.EXPDATE` parameter). A warning e-mail may be sent before or after the expiration date.

Previously, an e-mail was always sent to a configured e-mail address as well as to e-Spirit. With FirstSpirit version 5.2R2, only one e-mail is now sent if an e-mail address is configured via the `LICENSE_EXPIRATION_MAIL_ADDRESS` parameter in the `fs-server.conf` file. E-mails are no longer sent to e-Spirit automatically.



For more information, see *FirstSpirit Manual for Administrators*, chapter “Area: Misc”.

36.11 FirstSpirit ServerMonitoring: Display of user sessions 5.2R16

The display of user sessions in FirstSpirit ServerMonitoring was intermittently erroneous due to incorrectly stored graph data (“FirstSpirit / Monitoring / Sessions” and “Overview / State, panel Sessions”).

As of the current version of FirstSpirit, values will be stored correctly again, and the graph display is again correct as of this version. Graph data which were intermittently incorrectly stored will continue to be displayed incorrectly in the graphs.

36.12 Forwarding of HTTP Header Information to an External Preview URL

5.2R3

FirstSpirit version 5.2R3 introduces the parameter `preview.externalDeliveryForwardHttpHeaders` which may be specified in the file `fs-server.conf`. This parameter accepts a comma-separated list which contains the names of HTTP header fields which should be forwarded to the external web server specified by the parameter `preview.externalDeliveryURL`. Evaluation of this parameter is case-insensitive.

Possible values:

- Parameter is specified with an empty value
No header fields and cookies are forwarded to the external web server.
- `preview.externalDeliveryForwardHttpHeaders=Cookie` (Default)
Cookies set in header fields will be forwarded to the external web server, other header fields will not be forwarded. This setting is also used if the parameter is not specified in `fs-server.conf`.
- `preview.externalDeliveryForwardHttpHeaders=*`
All header fields will be forwarded to the external web server. (Note: If the wildcard `*` is contained in a comma-separated list that contains explicit mentions of HTTP header fields, the wildcard will be ignored.)
- `preview.externalDeliveryForwardHttpHeaders=f1,f2`
The HTTP header fields named “f1” and “f2” will be forwarded to the external web server.



For further information, see *FirstSpirit Manual for Administrators*, chapters

- “Area: Preview”
- “Passing authentication cookies”

36.13 Importing a project with missing presentation channel 5.2R13

If a project with a template set (“ServerManager / Project properties / Template sets”) is imported to a FirstSpirit Server for which there is no presentation channel (“ServerManager / Server properties / Presentation channels”) on the server, this is now logged with the following error:

```
Error: Unable to map channel for template set 'html', channel 5 not found
```

In order to use the project, it must be activated in the ServerManager after importing via the “Project / Reactivate” function, and the desired template set (available on the server) must be selected under “Project properties / Template sets”.

36.14 Isolated mode: Jetty web server is now also available as a module


5.2R13

Using the open source product “Eclipse Jetty”, which is integrated into FirstSpirit, a web server as well as a JSP/Servlet-Engine are provided, running as part of the FirstSpirit server in the same VM.


As part of the refactoring for the module development in the so-called “Isolated mode” (see *FirstSpirit Developer Manual for components (German only)*, chapter “Isolated mode”), Jetty has been implemented as a module: `fs-jetty.fsm`. Because of the isolated class loading the Jetty server behaves like an external web server and is therefore suitable for being used with a FirstSpirit server operated in “Isolated mode”. The module may be installed parallel to the previous implementation “InternalJetty” (see *FirstSpirit Manual for Administrators*, chapter “Apache HTTP Server with the Jetty servlet engine” e.g. the parameter `INTERNAL_SERVLET_ENGINE` in `fs-server.conf` is set to 1 or undefined).

In order to use Jetty as a module, the module has to be installed on the FirstSpirit server and the corresponding service “JettyService” has to be started in the server properties of the ServerManager. Here it is also possible to configure the favored port (changing the port requires a restart of the service):



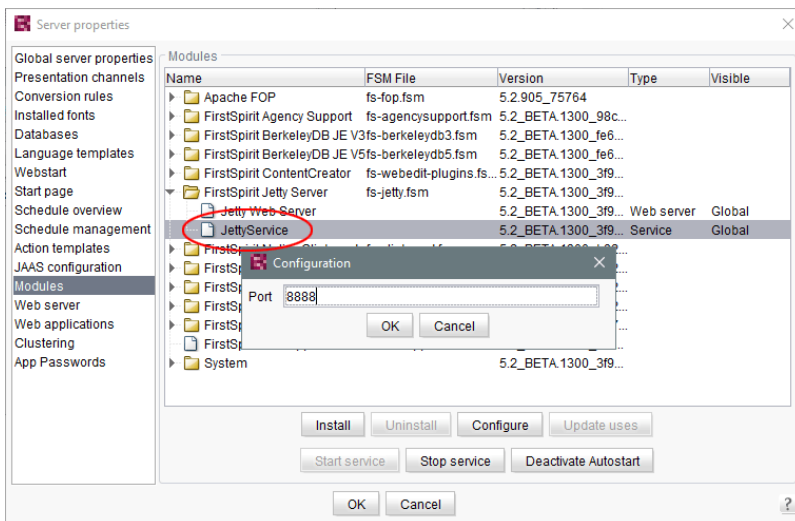


A new web server of the type “Jetty Web Server” may be added using “Webserver” in the server properties (e.g. with the name “IsolatedJetty”):

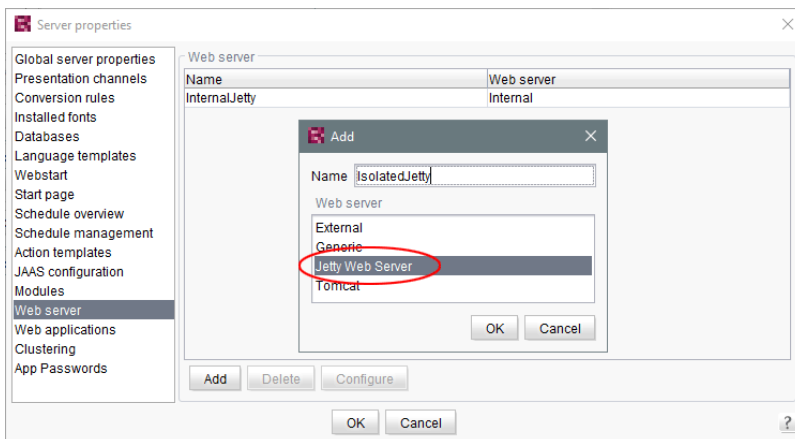

The web server may now be selected in the project properties under “Web components”:



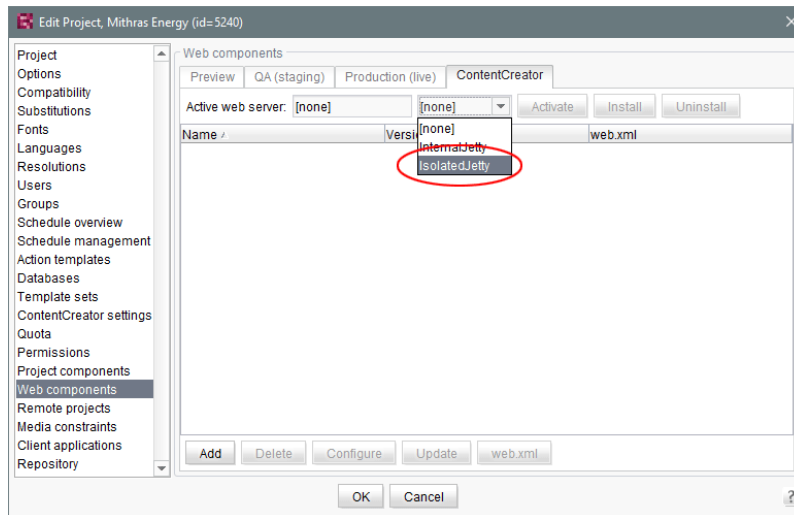

Both the previous implementation “InternalJetty” as well as the new module are not suitable for productive use and should only be used for testing purposes.

36.15 Log in via the HTTP request header (“RequestHeaderLoginModule”)

5.2R2

FirstSpirit uses the Java standard JAAS (“Java Authentication and Authorization Service”) to authenticate its users. Various JAAS modules are already integrated in FirstSpirit and provide various methods of user authentication. In FirstSpirit version 5.2R2, the “RequestHeaderLoginModule” has been added to the FirstSpirit standard (module name: `de.espirit.firstspirit.server.authentication.RequestHeaderLoginModule`). This module is used in conjunction with a web access management system, i.e., a reverse proxy with a simultaneous authentication function. The reverse proxy automatically authenticates the user who calls up the FirstSpirit start page using a web browser. In each HTTP request following successful authentication, the reverse proxy transfers the user name of the authenticated user between the reverse proxy and the FirstSpirit WebApp server. It does so by means of an entry in the HTTP request header. To ensure the authenticity of the transferred user name in the HTTP request header, the “RequestHeaderLoginModule” checks either the sending proxy's IP address or its HTTP client certificate. FirstSpirit then accepts the transferred user name as a FirstSpirit user name. This means there is no need for the user to perform additional authentication on FirstSpirit.

For more information, see *FirstSpirit Manual for Administrators*, chapter “Logging in via the HTTP request header”.



36.16 Logging in "fs-server.log" (NoRouteToHostException) 5.2R7

Due to a change regarding the communication between multiple FirstSpirit servers in a network, an increased logging in the log file `fs-server.log` like

```
INFO 15.03.2016 10:46:23.550 (org.apache.http.impl.execchain.RetryExec): I/O
exception (java.net.NoRouteToHostException) caught when processing request to
{}->http://testserver:8000: No route to host
```

may happen, e.g. when a FirstSpirit server is not reachable ("http://testserver:8000" in the example above).

These entries can be suppressed with the newly implemented parameter `log4j.logger.org.apache.http.impl.execchain.RetryExec` in the file `fs-logging.conf`. The parameter has to be set to `WARN` in order to increase the log level:

```
log4j.logger.org.apache.http.impl.execchain.RetryExec=WARN
```

With FirstSpirit servers running the current FirstSpirit version the parameter will be set by default. For existing FirstSpirit servers upgraded to the current FirstSpirit version, the parameter has to be added manually to the file `fs-logging.conf` (in the subdirectory `conf` of the FirstSpirit server).

For more information regarding the file `fs-logging.conf` please see *FirstSpirit Manual for Administrators*, Chapter "Logging configuration (fs-logging.conf)".

36.17 MBeans for visualization and control of database connections ("ConnectionPool") 5.2.426, 5.2R5

Java Management Extensions (JMX) provide a standardized interface for the management of Java applications. Using the JMX console, it is possible to monitor and manage a FirstSpirit server. While FirstSpirit ServerMonitoring is primarily used for manual monitoring of a FirstSpirit server, the JMX interface is used for automatic monitoring and can integrate into existing, enterprise-wide monitoring infrastructures. All values and operations are provided by Managed Beans ("MBeans").

The current FirstSpirit version provides MBeans in the JMX console entry "ConnectionPool" which allow visualization and control of database connections.




For further information , see *FirstSpirit Manual for Administrators*, chapter “ConnectionPool”.

36.18 Media Constraints: MIME Type Detection 5.2R17

Previous behavior: Media constraints for non-image files are generally based upon file name extensions, not MIME types.

New behavior: In project settings for media constraints, the new option “MIME probing has priority” is available as a checkbox.

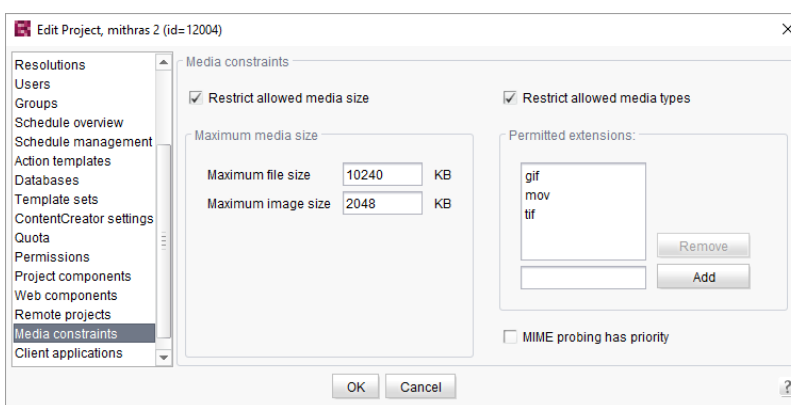

- If the option is *active* (checkbox marked), media constraints prioritize MIME type detection over the file name extensions set in “Permitted extensions”. If the detected type does not correlate to the permitted file name extensions, a file upload will be denied.
- If the option is *inactive* (checkbox not marked), media constraints for non-image files consider only file name extensions, not MIME types.

36.19 Media: Assigning File Extensions to MIME Types 5.2R10

The FirstSpirit Media Store is designed to manage files of different formats within a project. They can be uploaded to FirstSpirit via SiteArchitect and ContentCreator.

Most file formats are already known by FirstSpirit and they are filed in the Media Store with the appropriate MIME type when uploaded. It is possible to search for MIME types in SiteArchitect, for example, and access them in templates and via API. For special file types which are not known in FirstSpirit, mapping can now be carried out on the desired MIME types, namely via a new parameter in the `fs-server.conf` configuration file:



```
mime.types.additional
```

Using this parameter, the desired MIME type and the file extension can be specified, separated with a colon. Several mappings can be specified, separated with semicolons.

Example:

```
mime.types.additional=application/zip:fsr;text/plain:conf
```

If this parameter is edited via ServerMonitoring, changes are factored in immediately; the server does not need to be restarted.

In this context, the detection of file extensions when uploading files to FirstSpirit has also been improved.

36.20 Modified protocol for FirstSpirit web applications 5.2R4

Usually, FirstSpirit versions are forward and backward compatible if only the number of the minor or build version changes. In order to support the new FirstSpirit Health Center functionality, the protocol for FirstSpirit web applications was modified and is now incompatible to that of previous versions. As in any upgrade and downgrade procedure, it is necessary to ensure that the FirstSpirit web applications are compatible with the FirstSpirit server software's version.

If JAR files were manually deployed into web applications or onto web servers, the following message may be written to the log:

```
java.lang.IllegalArgumentException: Wrong protocol version (4653080000)
```

In this case, the JAR files must be updated manually.

36.21 New Configuration Opportunity for Timeouts in LDAP Sections and for Login to the Root Web Application (fs-server.conf) 5.2R20

The FirstSpirit server allows creation of several LDAP configurations (so-called "sections", see *FirstSpirit Server configuration / Configuration files (FirstSpirit Server) / FirstSpirit Server (fs-server.conf) / LDAP (→Documentation for Administrators)*). Each section contains at least one entry for an LDAP server which provisions LDAP data.



If a server fails or takes too long to answer (>30 seconds), timeouts may arise:

- timeout during login to the root web application
- timeout of the LDAP connection

The time span after which a timeout occurs may now be increased via the parameters `web.login.timeout` and `LDAP.TIMEOUT` (default value: 30).

Configuration of timeout for login to the root web application:

```
# login timeout in seconds for web authentication
web.login.timeout=30
```

Configuration of LDAP timeout:

```
// connect and read timeout in seconds
LDAP.TIMEOUT=30
```

36.22 New MBeans 5.2R15

Java Management Extensions (JMX) provide a standardized interface for the management of Java applications. Using the JMX console, it is possible to monitor and manage a FirstSpirit server. While FirstSpirit ServerMonitoring is primarily used for manual monitoring of a FirstSpirit server, the JMX interface is used for automatic monitoring and can integrate into existing, enterprise-wide monitoring infrastructures. All values and operations are provided by Managed Beans (“MBeans”).

The current FirstSpirit version provides new MBeans:

- `ConnectionPool`
- `License`
- `ProjectManager`
- `ScheduleManager`



- `SessionCounter`

For more information see also help texts in the tool (JVisualVM or JConsole.)

36.23 Optimization in Schedule Management 5.2R18

During the following actions, the associated project is temporarily deactivated:

- Switching the repository backend (“FirstSpirit ServerManager / Project properties / Repository / Backend”)
- Installing an archive (“FirstSpirit ServerManager / Project / Archive / Install archive”)

As of the current version of FirstSpirit, schedule tasks configured in such a project will no longer be deactivated (Schedule management / option “active”) as the project is temporarily deactivated. Schedule tasks that are currently running will be aborted (status “aborted”) when one of the actions listed above is started; the action will only be executed once schedule task has been ended.

36.24 Optimizations related to use of the FirstSpirit Launcher 5.2R3

FirstSpirit version 5.2R3 features several optimizations related to use of the FirstSpirit Launcher:


Use of the FirstSpirit Launcher is now possible via HTTPS. The entire client-server communication, including download of JAR and JRE files, can be encrypted.

Restriction of using the FirstSpirit Launcher via SSL: SSL certificates can currently (as of January 2016) not be validated while downloading the JRE and JAR files from a FirstSpirit server. However, validation of SSL certificates is planned for a future release.

Furthermore, security related to the use of authentication cookies has been improved. In order to successfully use the Launcher, the required cookies (see parameter `clientCookieNames` in the configuration file `fs-server.conf`) must be configured with an adequate lifespan. See also *FirstSpirit Manual for Administrators*, chapter “Area: Communication”.

Roll-out via MSI: Installation of the Launcher on a single workstation (until FirstSpirit version 5.2R2, inclusively: “Install Launcher as user”) may still be performed via the FirstSpirit start page (from FirstSpirit version 5.2R3 onwards: “Install Launcher”).



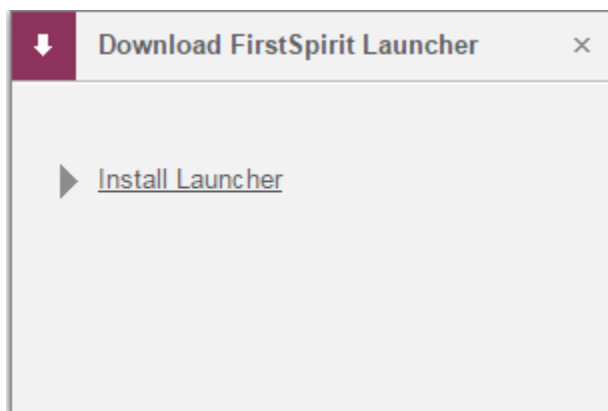

Installation for multiple workstations (until FirstSpirit version 5.2R2, inclusively: Install Launcher as administrator) requires execution of the file `FSLauncherSetup.msi`, available in `~FirstSpirit5\web\fs5root\clientjar`. See also *FirstSpirit Installation Instructions*, chapter “Distribution of MSI packages with a GPO”.

For improved clarity and due to permissions, the Launcher now consistently uses one directory to store files.

For further information, see

- *FirstSpirit Installation Instructions*, chapter “FirstSpirit Launcher (new in V5.2)”
- *FirstSpirit Manual for Administrators*, chapter “FirstSpirit Launcher”
- *FirstSpirit Manual for Administrators*, chapter “Area: Communication”


36.25 Permissions for FirstSpirit modules (Template Wizard, Template Debugger, Template Inspection) 5.2R2

The “FirstSpirit Template Wizard”, “FirstSpirit Template Debugger”, and “FirstSpirit Template Inspection” functions are designed to make life easier for template developers and can be implemented via FirstSpirit modules. FirstSpirit version 5.2R2 can be configured so that only certain user groups are able to access and execute this function in SiteArchitect.

The corresponding configuration settings are made with the project components included in the scope of delivery. These must be added to the required project in the FirstSpirit Server Manager (under



“Project components”, “FS-AgencySupport-ProjectPermissions” for the Template Wizard, “FS-TemplateDebugger-ProjectPermissions” for the Template Debugger and Template Inspection). For the Template Debugger and Template Inspection, it is only possible to specify the same permissions; the functions are interdependent. Clicking on Configure or double-clicking on the relevant project component opens a dialog in which the required group(s) can be selected:

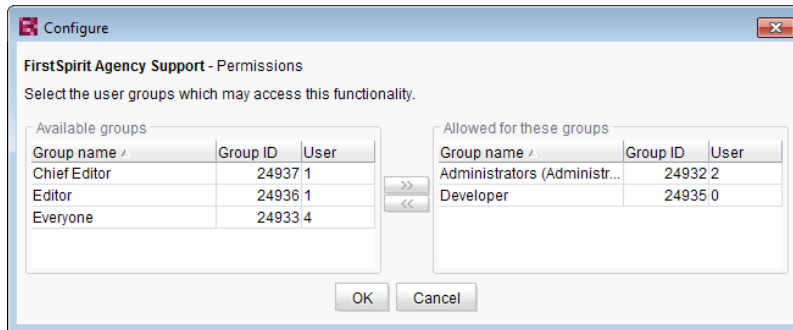

The groups that have access to the project are displayed on the left-hand side (“Available groups”). The groups that are permitted to use the corresponding function are displayed on the right-hand side (“Allowed for these groups”) along with their ID and the number of users they contain. To check which users belong to a group, select “Show users” from the context menu.

The corresponding icons are displayed on the horizontal tool bar in SiteArchitect or on the “Template Inspection” context menu entry in the integrated preview for members of the “allowed group(s)”. The corresponding icon is hidden for users who are not in one of the selected group. To move a group to the right-hand side or left-hand side, select it and

- click the icons



- double-click or
- select the corresponding command from the context menu (“Allow group(s)” or “Remove group(s) from allowed”).

The project components are **not** assigned by default, which means even the corresponding icons and context menu entry are not displayed in SiteArchitect. To enable the functions for a particular project, the



corresponding project components must be added to the project by the ServerManager and the required group(s) must be selected using “Allowed for these groups”.

For more information, see

- *FirstSpirit Manual for Administrators*, chapter “Groups”,
- *FirstSpirit Manual for Administrators*, chapter “Project components”,
- *FirstSpirit Online Documentation*, chapter “Template development / Debugging / Where is the error? / FirstSpirit Debugger”,
- *FirstSpirit Online Documentation*, chapter “Template development / Debugging / Where is the error? / Template Inspector”,
- *FirstSpirit Online Documentation*, chapter “Template development / Template Wizard”

36.26 Project archiving: Abort archival due to insufficient available storage space 5.2R15

FirstSpirit uses repositories to archive and maintain version histories of project data. Each project has a repository in the server directory `data\projects\`. For each action carried out in the project, data is written to the repository. This applies to actions that create new elements as well as actions that delete elements. In addition, deleted elements are not removed from the repository. Since new data is always being added, the repository will continue to grow and will always require more hard disk space.

The schedule action “Archive old project states” is used to carry out archival of the selected project so that data which is no longer required is moved out of the project and into a repository, thereby reducing load times and increasing the performance of the FirstSpirit server. Data is moved from the repositories to archive files. Archive files that are no longer required can subsequently be deleted in order to free up hard disk space.

During archival, the available storage space of the volume in which the repository directory is located will now be monitored. If the available storage space falls below the following thresholds, the archival run will be aborted:

- option `hdd.limit` (configuration file `fs-server.conf`)



- the available storage space is less than half of what was available at the time archival was started

If archival is aborted due to these conditions, the following message will be written to the server log:

```
repository iteration interrupted, file system usage limit reached - lastId=[ID]
```

The log entry mentions the ID of the last archived element of this archival run. When the archival schedule task is started again, archival will continue from this point.

For further information about project archiving, see *FirstSpirit Manual for Administrators*, Chapter

- “FirstSpirit ServerManager / Project archiving”
- “FirstSpirit ServerManager / Schedule entry planning / Project-based actions / Archive old project states”

36.27 Proxy authentication via Kerberos/SPNEGO or NTLM 5.2R2

In FirstSpirit version 5.2R2 and higher, authentication based on Kerberos/SPNEGO or NTLM is supported through HTTP. This means that whenever SiteArchitect or ServerManager is connected to the FirstSpirit Server, transparent authentication based on Kerberos/SPNEGO or NTLM is attempted automatically (proxy or host). This method of authentication is only supported on Windows operating systems and on operating systems which support the Java GSS API.

To perform automatic authentication on Windows when using a proxy, the desired Kerberos SPN (“Service Principal Name”) must be provided as follows:

```
-Dfs.http.kerberos.spn=HTTP/proxy.example.com
```

However, automatic Kerberos authentication against both proxy and host at the same time is not possible on Windows.


For more information, see *FirstSpirit Manual for Administrators*, chapter “Configuring connection settings”.



36.28 Reduce project exports by excluding pre-calculated image resolutions 5.2R2

The export function (“FirstSpirit ServerManager / Project / Export”) or the “Execute project backup” schedule entry (“FirstSpirit ServerManager / Project / Schedule management”) can be used to create a compressed file of FirstSpirit projects so that these can then be transferred to another FirstSpirit Server, for example.

Resolutions that have been defined for a project can be automatically calculated by the system and saved on the server side. This method speeds up generation times. (Generating large numbers of media in many different resolutions is very time-intensive. With FirstSpirit version 5.2R2, these automatically calculated image resolutions can now be excluded from the export. To enable this, the “Export automatically calculated image resolutions” checkbox must be unchecked.

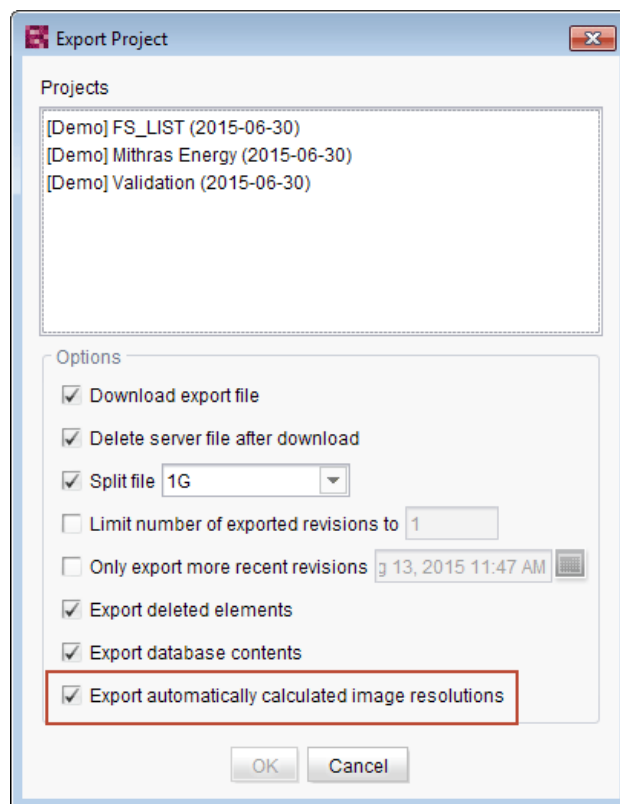

In this case, the content of the server-side image cache (MEDIA_STORE_CACHED_PICTURES) is not exported.

This checkbox is not selected by default.



For more information, see *FirstSpirit Manual for Administrators*, chapter

- “Export”
- “Resolutions”
- “Execute project backup”

The process of exporting automatically calculated image resolutions can also be controlled via the FirstSpirit Access API using the `setExportCachedPictures(final boolean exportCachedPictures)` method in the `ExportParameters` interface.


36.29 Refactoring of the file `fs-webapp.xml` (web server "Jetty") 5.2R12

The file `fs-webapp.xml` in the sub-directory “conf” of the FirstSpirit server contains configuration settings for the internal web server “Jetty”. Due to refactoring measures, entries were removed from this file. This change only affects new installations. For existing FirstSpirit installations, this change may be carried out manually by the FirstSpirit administrator if so desired.

The following lines may be removed from the file `fs-webapp.xml`:




```
<!-- FirstSpirit Web Applications -->
<!-- ===== -->
<New class="de.espirit.firstspirit.server.jetty.
JettyManagerImpl$FailSafeWebAppContext">
<Arg><Ref refid="Contexts"/></Arg>
<Arg><SystemProperty name="WEBAPP_ROOT_PATH"/></Arg>
<Arg><SystemProperty name="WEBAPP_ROOT_URL"/></Arg>
</New>
<New class="de.espirit.firstspirit.server.jetty.
JettyManagerImpl$FailSafeWebAppContext">
<Arg><Ref refid="Contexts"/></Arg>
<Arg><SystemProperty name="WEBAPP_WEBMON_PATH"/></Arg>
<Arg><SystemProperty name="WEBAPP_WEBMON_URL"/></Arg>
</New>
<New class="de.espirit.firstspirit.server.jetty.
JettyManagerImpl$FailSafeWebAppContext">
<Arg><Ref refid="Contexts"/></Arg>
<Arg><SystemProperty name="WEBAPP_WEBEDIT5_PATH"/></Arg>
<Arg><SystemProperty name="WEBAPP_WEBEDIT5_URL"/></Arg>
</New>
<New class="de.espirit.firstspirit.server.jetty.
JettyManagerImpl$FailSafeWebAppContext">
<Arg><Ref refid="Contexts"/></Arg>
<Arg><SystemProperty name="WEBAPP_STAGING_PATH"/></Arg>
<Arg><SystemProperty name="WEBAPP_STAGING_URL"/></Arg>
</New>
<New class="de.espirit.firstspirit.server.jetty.
JettyManagerImpl$FailSafeWebAppContext">
<Arg><Ref refid="Contexts"/></Arg>
<Arg><SystemProperty name="WEBAPP_PREVIEW_PATH"/></Arg>
<Arg><SystemProperty name="WEBAPP_PREVIEW_URL"/></Arg>
</New>
```

 The integrated web server Jetty is not fit for use in production scenarios and should only be used for testing.

36.30 SMTP Authentication 5.2R3

FirstSpirit version 5.2R3 enables sending e-mails via SMTP using authenticated connections. Authentication is configured in the configuration file `fs-server.conf`:



`mail.smtp.login`: This parameter specifies the user name used to authenticate against the SMTP server. The user configured here must be known by the specified SMTP server. Additionally, this user's valid password must be configured using the parameter `mail.smtp.password` (see below).

`mail.smtp.password`: This parameter specifies the password of the user (`mail.smtp.login`) used to authenticate against the SMTP server.

If both parameters (`mail.smtp.login` and `mail.smtp.password`) are configured, mail submission by FirstSpirit will use authenticated connections. If these parameters are not specified, authenticated connections will not be used.

The Java interface “Javamail” provides further parameters and configuration opportunities for mail submission (e.g. configuration of encryption). These parameters may be configured in the file `fs-server.conf`, prefixed with `javamail`, e.g.:

```
javamail.mail.smtp.starttls.enable=true
javamail.mail.smtp.starttls.required=true
# enable SASL to support CRAM-MD5 authentication
javamail.mail.smtp.sasl.enable=true
```


For further information, see

- *FirstSpirit Manual for Administrators*, chapter “Area: Mail”
- [Javamail API](#)

36.31 Schedule Tasks: Option "Execute even in case of error" is turned off by default 5.2R19

In FirstSpirit, schedule tasks are used to automate actions pertaining to the administration of projects (e.g. generation or publication) so that they are executed at defined, planned times. Each schedule task can consist of several actions which are executed in a specified order, e.g.:



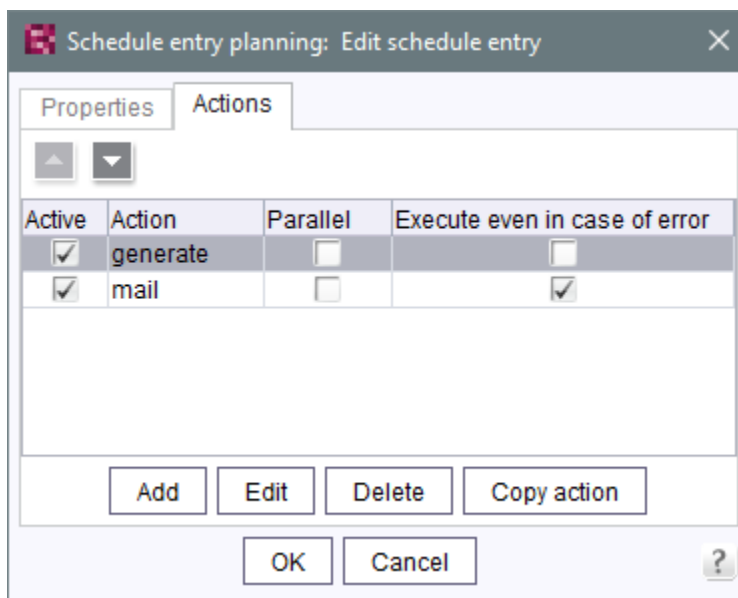

For each action, the option “Execute even in case of error” specifies if this action should be executed if its preceding execution was erroneous. For actions that are newly added to a schedule task, this option is now turned off by default; if a newly added action should be executed after the preceding execution resulted in an error, the checkbox of this option must be checked. Until now, the checkbox was checked by default for newly added actions.

For further information, see *FirstSpirit Manual for Administrators*, chapter “FirstSpirit ServerManager / Schedule entry planning”, specifically the page “Add schedule entry (Actions tab)”.


36.32 Schedule management, action "Execute generation": New setting - Generate release version or current state 5.2R15

In a project which uses release functionality (FirstSpirit ServerManager - project properties - page “Options” - option “Use Release function”), FirstSpirit differentiates between the released state and the current state of the project. If a project uses this option, changes in the project must be released by a user with appropriate privileges (e.g. an editor-in-chief) in order to become visible in the generated output.

Previously: An unreleased project state, e.g. a page in the Page Content store, will not be output during the next generation. Instead, the most recent released state of the page will be used.

Now: The dialog “Schedule entry planning: Execute generation” contains a new option “Generate release version” as a checkbox:



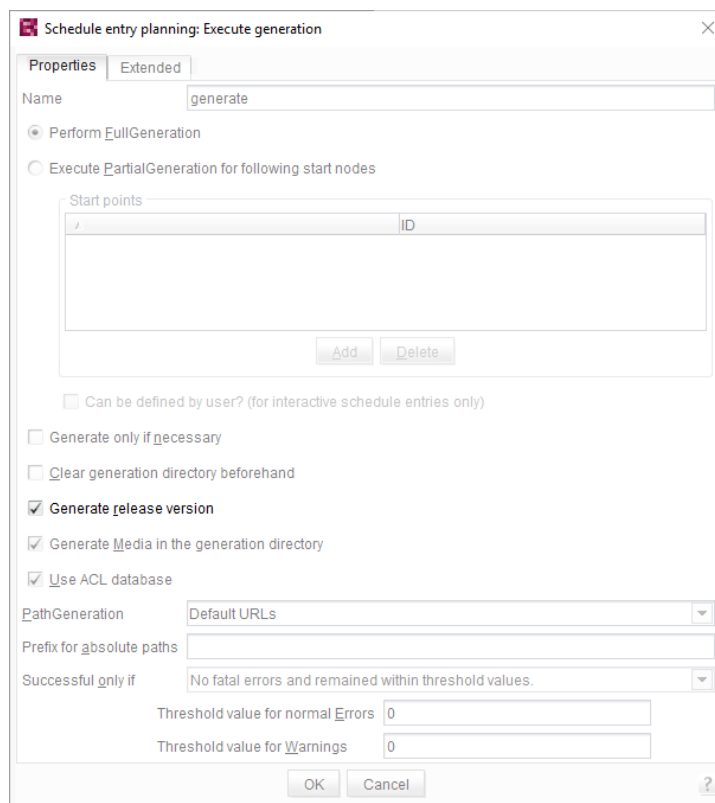

- If this option is *activated* (checkbox marked), the release version of the project will be generated (default setting).
- If this option is *deactivated* (checkbox unmarked), the current state of the project will be output during generation (even if this state contains changes which have not been released at the time of generation).

36.33 Security improvements in FirstSpirit ServerMonitoring and web applications 5.2R2

Implemented measures to improve security in FirstSpirit ServerMonitoring as well as in FirstSpirit web applications.

36.34 Server Update: File name change for backup copies of files 5.2R6

An update of a FirstSpirit server to a newer software version can be started via FirstSpirit ServerMonitoring (e.g. "FirstSpirit / Control / Update"). During the update process, the file `fs-server.jar` which



contains the new FirstSpirit version will be copied to `~\server\lib\`. The old `fs-server.jar` file will be kept as a backup copy in the same directory. The file name of this backup copy will be formed by appending the current date and the suffix `.old`. Additionally, from the current FirstSpirit version onwards, the original file name `fs-server.jar` will be changed to `fs-server.jar`. Example for the file name of an `fs-server.jar` backup copy:

```
fs-server.jar_20160921_155039.old
```

In previous FirstSpirit versions, the file name would have been formed as follows:

```
fs-server.jar_20160921_155039.old
```

For further information about server updates via FirstSpirit ServerMonitoring, see *FirstSpirit Manual for Administrators*, chapter “Updating the FirstSpirit Server”.

36.35 Server update: Improved schedule logging 5.2.515, 5.2R6

It is also possible to update the FirstSpirit Server using a schedule designed for this purpose (FirstSpirit ServerManager, menu “Server / Properties / Schedule management”, action “Server update”).

To improve traceability, logging is now carried out with the current FirstSpirit version if a more recent version of FirstSpirit is not available for update purposes (this takes place in the applicable *fs-schedule.*.log* schedule log file and in the *fs-server.log* file). For example:

```
INFO 20.10.2016 09:30:00.113 (de.espirit.firstspirit.server.scheduler.update.ServerUpdateTaskExecutor): FirstSpirit server is up-to-date, no newer version available
```

If there is a new FirstSpirit version available for update purposes, logging is carried out with the current server version and the version to which the FirstSpirit Server is updated.

For more information, see *FirstSpirit Manual for Administrators*, Chapter “Updating the FirstSpirit Server”, specifically the “Automatic update via the update service” section.




36.36 Server updates using "pull" method 5.2R5

Only a current FirstSpirit version can ensure that all FirstSpirit functionality will be available and that the software will run as well and as reliably as possible. We therefore recommend updating existing FirstSpirit servers regularly and timely. FirstSpirit offers several update methods.

From FirstSpirit version 5.2R5 onward, it is no longer possible to perform updates via Linux package systems. Instead, FirstSpirit now offers uniform, platform-neutral update management for all FirstSpirit servers.

Updating to a newer software version **via locally available files** may be performed using FirstSpirit ServerMonitoring, via “FirstSpirit – Control – Update” or “FirstSpirit – Control – Network” (“Push”).

There, you can now also perform an update **via the update service** (web interface to e-Spirit, “Pull”). The file(s) required for the update is/are downloaded via web interface and then installed. When updating via this update service, various FirstSpirit software versions are available, indicating version line as well as release status:

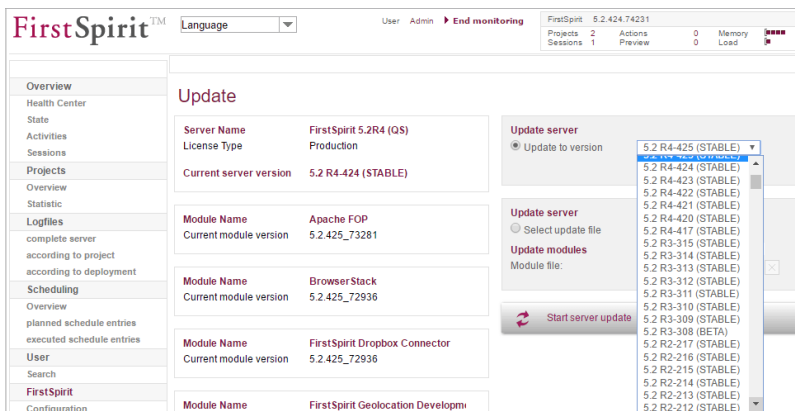

This functionality is only available if the FirstSpirit server was started using the Java wrapper.

For further information, see

- *FirstSpirit Manual for Administrators*,
 - Chapter “Updating the FirstSpirit Server”
- *FirstSpirit Installation Instructions*,
 - Chapter “Update”



36.37 Start-up process: FirstSpirit server starts up independently of web application updates 5.2R6

Previously, problems could arise during start-up of a FirstSpirit server if the update of a web application took an inordinately long time. Furthermore, the start-up process of a FirstSpirit server was considered to be finished only once the web applications were updated.

As of the current FirstSpirit version, the start-up process is considered to be finished **before** web application updates are performed. This implies that communication with the FirstSpirit server via API is already possible before web applications are up-to-date.

For further information about FirstSpirit web applications, see *FirstSpirit Manual for Administrators*, chapter “FirstSpirit web application configuration”.

36.38 Starting process: Improved stability when accessing FirstSpirit web applications on external web servers 5.2.515, 5.2R6

Using an external web server (for example Apache Tomcat) could led to problems concerning starting the FirstSpirit web applications on the external web server (for example FirstSpirit start page, ContentCreator etc.) because of varying start speed and / or start order of these servers.

Starting with the current FirstSpirit version, the external web server (for example Apache Tomcat) waits up to 5 minutes for a connection to the FirstSpirit server now. The FirstSpirit server can be started within this time interval. The external web server checks every 10 seconds if a connection can be established to the FirstSpirit server. When a connection can be established the FirstSpirit web applications connect automatically to the server.

Thus, for ensuring a frictionless start of external web server, FirstSpirit server and FirstSpirit web applications you should start the external web server always first and the FirstSpirit server afterwards.

Moreover, this allows that the FirstSpirit server will be able to install updates of web applications, if necessary, in any case because the external web server has already been started at this time.


For more information about using external web servers with FirstSpirit please see *FirstSpirit Manual for Administrators*, chapter “Integration into an external web server”.



36.39 The new FirstSpirit Health Center 5.2R4

The browser-based FirstSpirit ServerMonitoring is used to monitor the FirstSpirit Server. In addition to current operational parameters such as memory utilization, number of users, projects and sessions, it shows configuration parameters and error reports of the server. Beyond that, the server can be configured by means of the ServerMonitoring, too.

Whereas until now you could retrieve system information for the local FirstSpirit Server using the page “State” (below the menu entry “Overview”), the new FirstSpirit Health Center provides from FirstSpirit version 5.2R4 onward data relating to hardware utilization, as well as clearly displaying information on which FirstSpirit versions and licenses are being used by all FirstSpirit servers on a network. You can therefore see at a glance where optimizations can be made in terms of the hardware and software used for FirstSpirit. This Health Center is the entry point for the FirstSpirit ServerMonitoring.

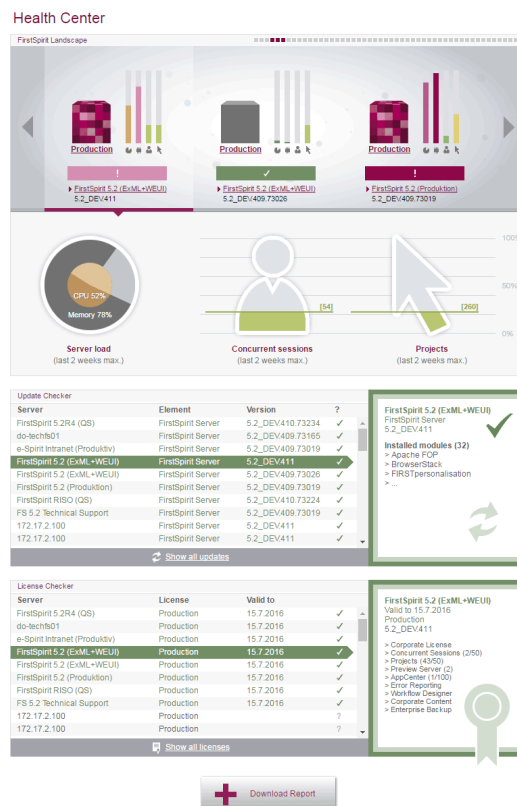

FirstSpirit Health Center



Thanks to the color coding used in the top area of the page (“FirstSpirit Landscape”), any looming **hardware** bottlenecks can be identified at a glance, so targeted measures can be taken at an early stage before there are any application delays or even system failures.

You can also use the Health Center to make sure, with the help of the system, that the local FirstSpirit server and/or all FirstSpirit servers on your network always have the most up-to-date software. Only a current **FirstSpirit version** can ensure that all FirstSpirit functions will be available and that the software will run as well and reliably as possible. You can use the Health Center to update your local server as well as other FirstSpirit Servers which can be reached on the network.

Note: To check if a FirstSpirit server uses the latest software version, a license ID is sent to e-Spirit, since this is all the information that is needed to carry out a detailed and accurate check. The license ID can also be used to check whether the maintenance contract for this license is still valid and whether the customer is therefore entitled to have errors fixed, for example.

If FirstSpirit is to run smoothly, it is also very important to use a valid **license** license that is appropriate for the type of use in question. Linked to the license are, among other things, the license holder’s maintenance permissions; this means that only if the customer has a valid license in conjunction with a valid maintenance contract will he be entitled to have reported errors fixed, for example. You can use the Health Center to update the license of your local server as well as those of other FirstSpirit Servers which can be reached on the network.

All the utilization/version and license data from this overview page can be summarized and downloaded in a file (.json format).

For more information see *FirstSpirit Manual for Administrators*,

- Chapter “FirstSpirit ServerMonitoring”
- Chapter “Licence configuration (fs-license.conf)”

and *FirstSpirit Installation Instructions*.

Modifications concerning the visualization of the used license were made within the scope of this Health Center implementation, too. The license with license type and licensee will now be displayed at the following points:


- FirstSpirit start page:





- FirstSpirit SiteArchitect:
 - start dialog (“Splash screen”)
 - horizontal tool bar
- FirstSpirit ContentCreator:
 - start dialog (“Splash screen”)
 - Page status area

Furthermore, FirstSpirit servers, on which the user was recently logged in, can be selected via the FirstSpirit start page. The start page of the selected server will open in a new browser window:

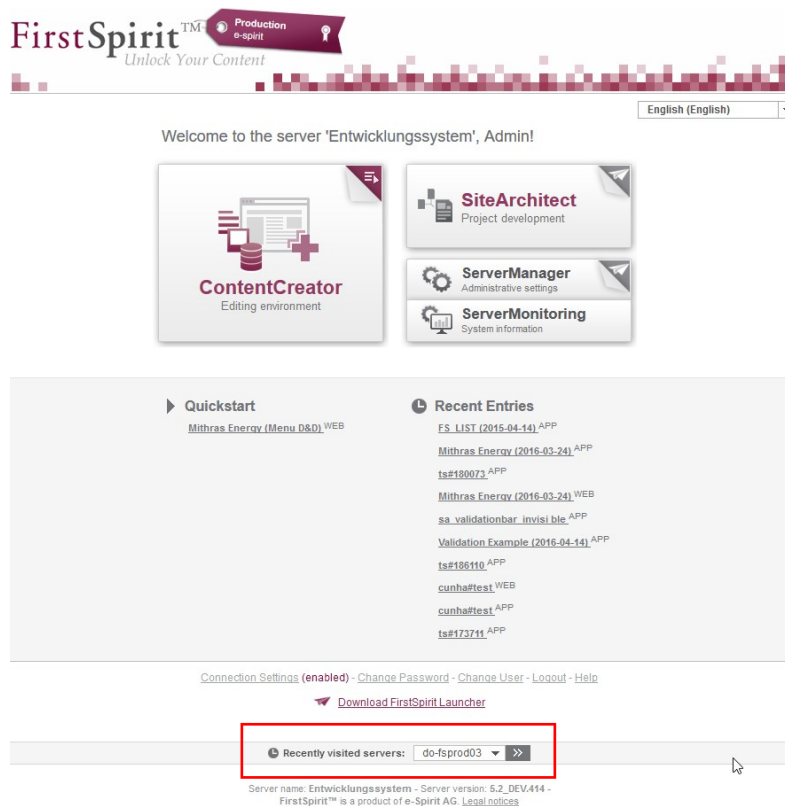


36.40 Updating web applications on external web servers 5.2.615, 5.2R7

FirstSpirit may be operated with external web servers (e.g. Apache Tomcat), for example in order to use special server-side implementations such as PHP or ASP.

During each start-up phase, the FirstSpirit server checks if the version of each web application rolled out to an external web server is up-to-date. If this is not the case, the FirstSpirit server updates the web application. Generally, the check if a web application is up-to-date is possible with the previous web server configuration (via the “Web server URL”, see illustration below). In some cases, however, this check is not possible via this URL, such that the web applications would be updated during each start-up phase of the FirstSpirit server. In these cases, from the current FirstSpirit version onwards, the internal web server URL of the web server may be configured for each web server (ServerManager / Server properties / area “Web server”, field “Internal web server URL”).

E.g. for the type “Tomcat”:

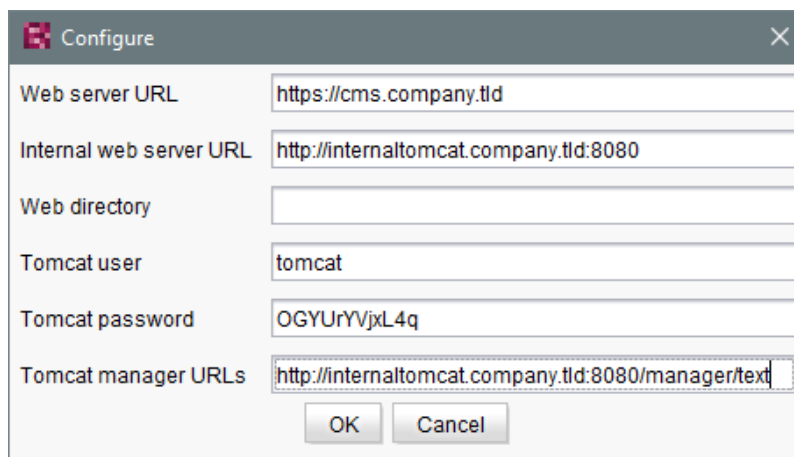

The screenshot shows a 'Configure' dialog box with the following fields and values:

| Field | Value |
|-------------------------|---|
| Web server URL | https://cms.company.tld |
| Internal web server URL | http://internaltomcat.company.tld:8080 |
| Web directory | |
| Tomcat user | tomcat |
| Tomcat password | OGYUrYVjxL4q |
| Tomcat manager URLs | http://internaltomcat.company.tld:8080/manager/text |

Buttons: OK, Cancel

Notes: The URL will only be used if the web directory is not set (field “Web directory”). The field “Internal web server URL” is not evaluated for web servers of the type “External” at the moment.

In this context, a method `getInternalURL` has been added to the interface `WebServer` (FirstSpirit Developer API, package `de.espirit.firstspirit.module`). This method provides the URL that is set for a web server in the field “Internal web server URL”.


For further information about use and configuration of web servers, see *FirstSpirit Manual for Administrators*:



- “Web server configuration (fs-webapp.xml)”
- “Integration into an external web server”
- “Web server”

36.41 Using preview applications in the ContentCreator (TPP) 5.2R16

If an external web application is to be used for the preview in FirstSpirit (a Single Page Application, “SPA”, for example), the respective URL can be entered into the “External Preview URL” text field in the FirstSpirit ServerManager under “Project / Properties / ContentCreator settings”:

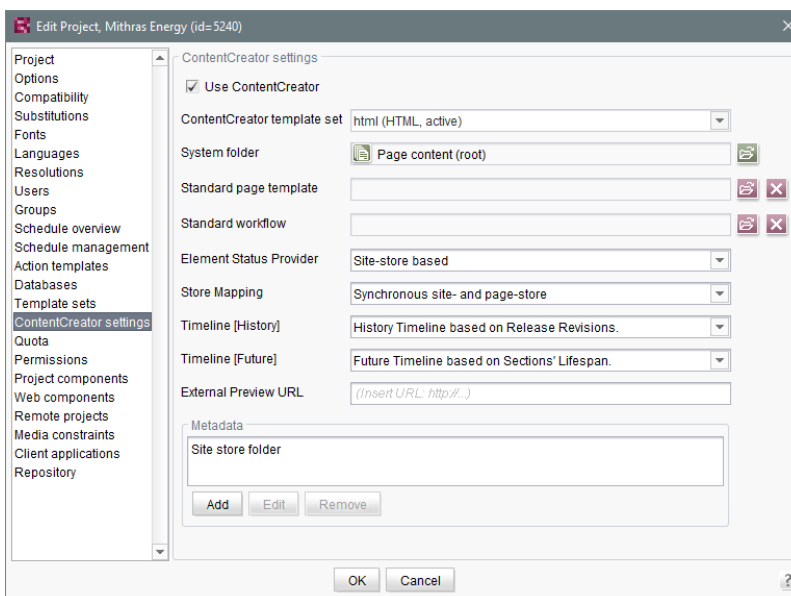

The preview application can then be used in the ContentCreator. If the linked application has been suitably prepared, the editor can still edit, create, and delete the contents displayed in the preview area with the functions of the ContentCreator. Relevant application examples are described in the CaaS documentation.

Please make sure that the URL specified here contains the protocol of the external web application. If the text field is empty (“Insert URL: http://...”), the internal ContentCreator preview function is used as before.



The URL can be read and also set by API (`getWebeditPreviewUrl` or `setWebeditPreviewUrl` method, `Project` interface, `de.espirit.firstspirit.access.project` package, FirstSpirit Access API).

36.42 Web server "Jetty" is now system module 5.2R20

The module `fs-jetty.fsm` (currently in the Early Access Program ("EAP")) which will replace the earlier implementation "InternalJetty", is now available as system module. This means that it exists on newly installed FirstSpirit servers as well as on existing FirstSpirit servers when they are updated to FirstSpirit version 5.2R20. The module needs no more to be installed manually.


This module bases on the most recent version: 9.4. However, this version is not compatible with Java 7 and requires at least Java 8.

The functions of the integrated Jetty server ("InternalJetty") were deprecated / discontinued with FirstSpirit version 5.2R18, and are scheduled to cease existing at all in August 2018 (FirstSpirit version 5.2R24). In the meantime, the currently integrated Jetty functions as well as Jetty as a module will be available in parallel with one another. During this period, it will be possible to test out the module and convert the operation of existing FirstSpirit installations that use Jetty to the Jetty module.


! Both the earlier implementation "InternalJetty" and the new implementation as a module run within the same JavaVM as the FirstSpirit server. This configuration is not suitable for production operation and should only be used for tests. For more complex configuration requirements (e.g. adjustment of memory size, timeouts, number of threads per deployed application, ...), use of an external web server (e.g. Tomcat) is recommended.

In order to use Jetty as a module, the corresponding service "JettyService" has to be started in the server properties of the `ServerManager`:



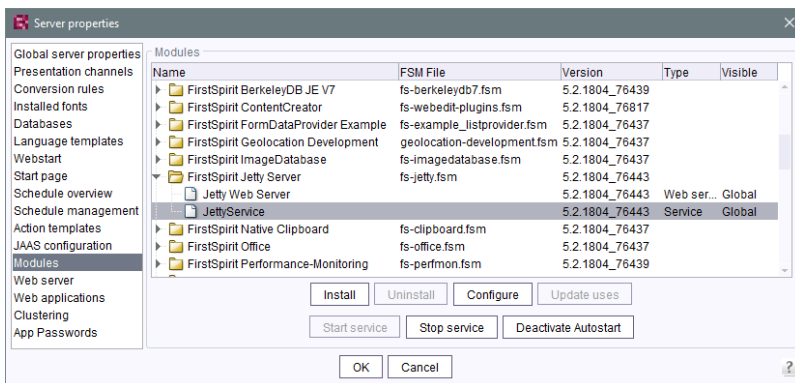


Here it is also possible to configure the favored port. (Changing this configuration requires a restart of the service “JettyService”):

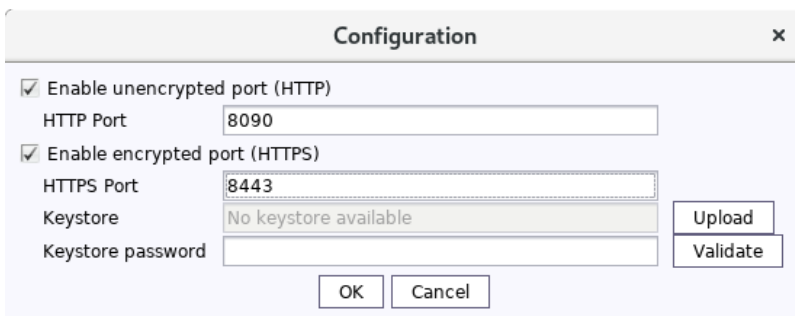

Creating encrypted connections (HTTPS) requires a keystore in JKS format. This can be uploaded using the button “Upload”.


After uploading the keystore and entering the corresponding password, a click on the button “Validate” checks the entered configuration. When successful, the number of detected aliases is displayed:

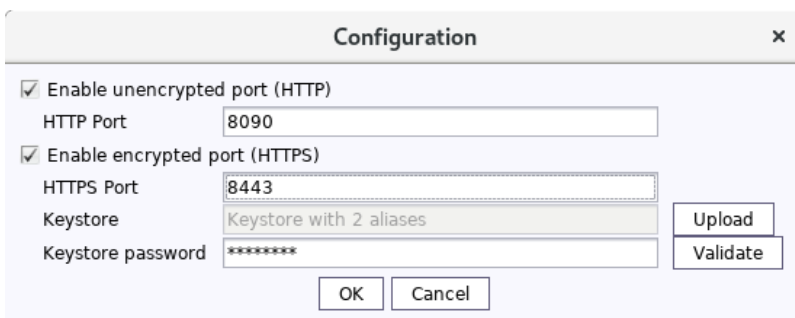


Configuration is completed with “OK”.



A new web server of the type “Jetty Web Server” may be added using “Webserver” in the server properties (e.g. with the name “IsolatedJetty”):

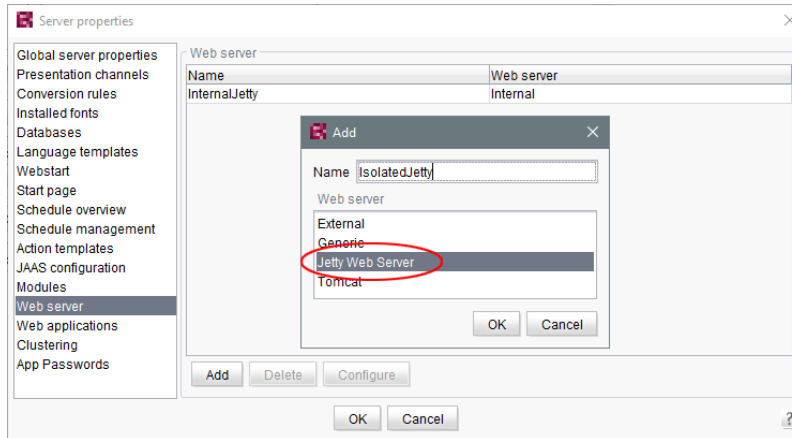

The web server may now be selected in the project properties under “Web components”:

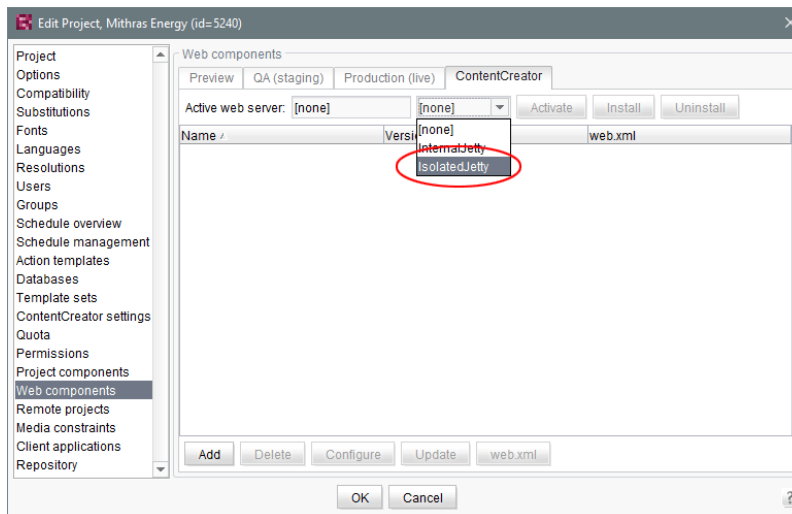


36.43 Web server Apache Tomcat: Automatic update of web applications

5.2R6


Apache Tomcat may be used as an external web server with FirstSpirit, operating either on the same host that runs FirstSpirit or on a dedicated host (“stand-alone” / “remote”).



Until now, if a stand-alone Tomcat was used, web applications installed on that Tomcat had to be updated manually upon each FirstSpirit update, e.g. via the buttons “Force update”, “Install” / “Activate” or “Update”, respectively, in FirstSpirit ServerManager, “Server properties / Web applications”

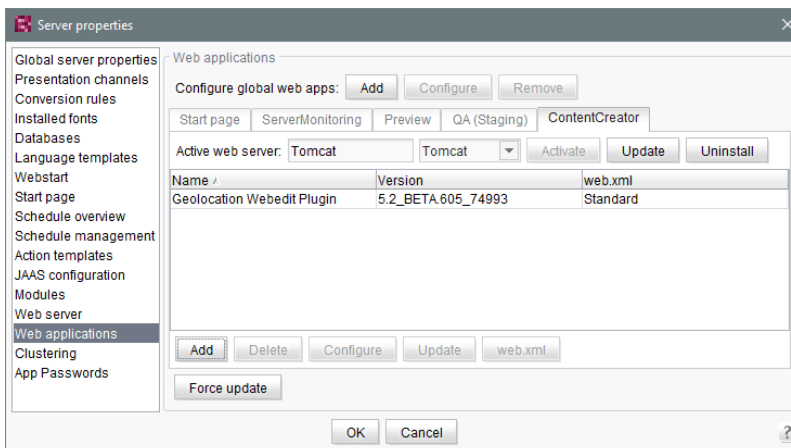

or in “Project properties / Web components”

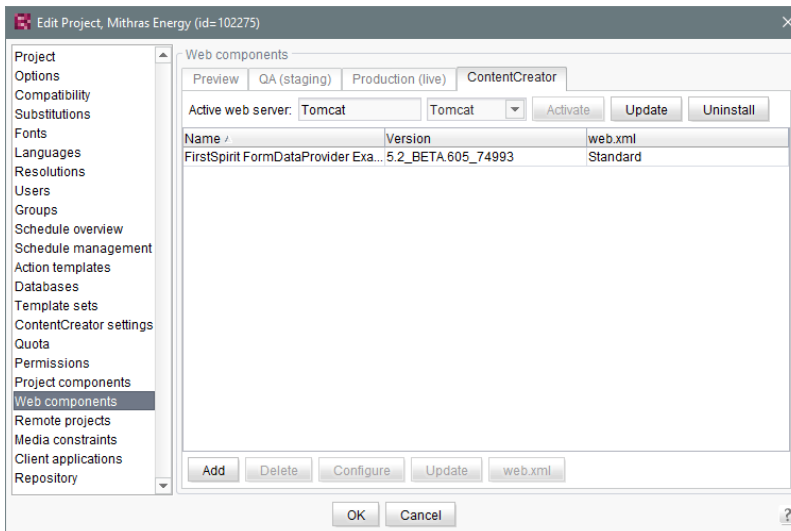

As of the current version of FirstSpirit, the FirstSpirit server will recognize if web applications on a Tomcat are not up-to-date and will trigger an update.

For further information, see *FirstSpirit Manual for Administrators*, chapters

- “Tomcat servlet engine on a dedicated host”




- “Web server”
- “Web applications”
- “Web components”

37 Compatibility

37.1 Downgrade to FirstSpirit 5.1 when using Berkeley DB V5 5.2R3

It is possible – in principle – to downgrade from one FirstSpirit minor version to another (for example from FirstSpirit version 5.2 to FirstSpirit version 5.1), but this is **not an assured product property**. Use of Oracle Berkeley DB version 5 as a repository for content storage (“FirstSpirit ServerManager / Project Properties / Repository / Backend”) can lead to problems when downgrading from FirstSpirit version 5.2 to FirstSpirit 5.1.

In order to downgrade a FirstSpirit server--which has initially been installed with a FirstSpirit version lower than 5.2 and now uses FirstSpirit version 5.2 as well as Berkeley DB version 5--to FirstSpirit version 5.1, the repository of each project must be configured to use Berkeley DB version 3 before conducting the downgrade.

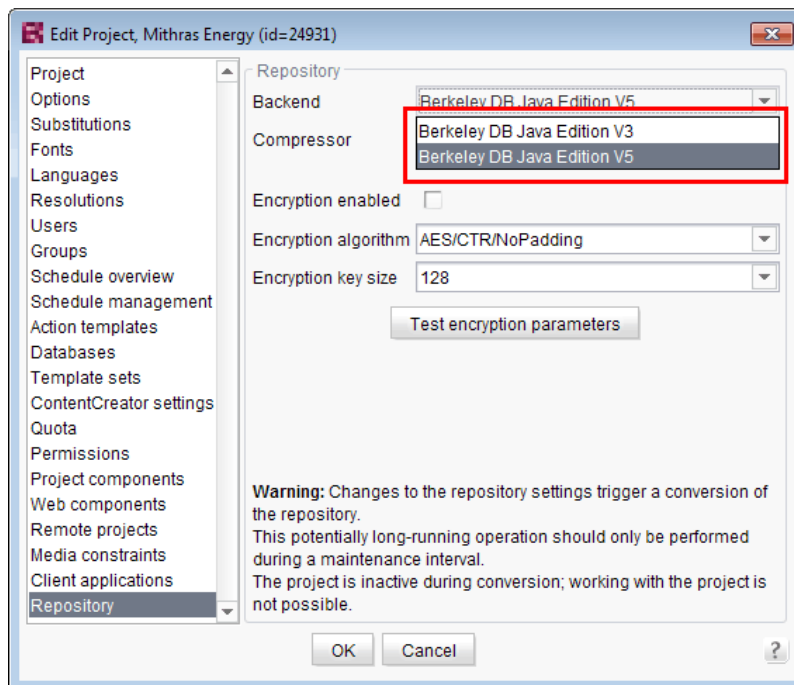

This only applies to servers which have initially been installed with a FirstSpirit version lower than 5.2. A downgrade of servers initially installed with FirstSpirit version 5.2 to a lower version is not possible.

For further information about selecting the desired Berkeley DB version, see *FirstSpirit Manual for Administrators*, chapter “Repository”.

38 ContentCreator

38.1 Create new list items using the FS_BUTTON 5.2R2

In the input components for creating lists:

- FS_CATALOG
- FS_INDEX
- FS_LIST (DATABASE and INLINE types)

the ContentCreator in FirstSpirit version 5.2R2 can now be used to create entries in the preview at the same time as creating new sections using a direct button, icon or link, without first having to open the form, for example:



The use of this functionality requires the use of the newly implemented FS_BUTTON handler class `de.espirit.firstspirit.webedit.server.executables.NewListEntryExecutable` (abbreviation: `NewListEntry`).

Example:

```
<FS_BUTTON
  name="button"
  hidden="yes"
  icon="fs:new"
  onClick="class:NewListEntry"
  onDrop="class:NewListEntry"
  style="firstspirit"
  useLanguages="no">
  <LANGINFOS>
    <LANGINFO lang="*" label="New entry"/>
    <LANGINFO lang="DE" label="Neuer Eintrag"/>
  </LANGINFOS>
</FS_BUTTON>
```

The relevant HTML code is rendered in the HTML presentation channel inside a “`$CMS_VALUE(...)`” instruction via the `fsbutton(...)` function. To do this, the input component (in this case: “`st_createListEntry`”) must be specified via the mandatory parameter `editorName`. The input component (in this case: “`st_linklist`”) in which the new entry is to be created must be specified via the mandatory parameter `editorId`. A further mandatory detail includes “`json: true`”, e.g.,

```
<div$CMS_VALUE(fsbutton(
  editorName: "st_createListEntry",
  parameter: {
    "editorId": editorId(editorName:"st_linklist", json: true)
  }
))$></div>
```

For more information, see *FirstSpirit Online Documentation*, chapter “Template development / Content-Creator / Functional scope”, section “FS_BUTTON handler classes”.



38.2 Deletion of bookmarks and master copies 5.2.611, 5.2R7

Frequently used elements may be bookmarked in FirstSpirit to enable easy access. In ContentCreator, an element is bookmarked by using the following button in the toolbar:



Bookmarked elements are then shown in the report area.

Here, bookmarked elements may also be set as master copies so that new elements may quickly be created based on the data of such frequently used elements. A bookmark may be set as a master copy by using the following button:



For sections, this button is also available within the section's toolbar in the preview.

If an element (e.g. a section) that is bookmarked as a master copy is deleted, the current FirstSpirit version will now show a confirmation dialog with the following note:

“The element 'xyz' is a master copy, would you like to delete it anyway?”

If the user clicks OK, the section and its associated master copy bookmark in the report area will be deleted.

Furthermore, elements which are bookmarked can now be deleted without errors in all cases.

For further information, see *FirstSpirit Manual for Editors (ContentCreator)*, “Report area / Bookmarks”.


38.3 Dynamically resizable report sidebar 5.2R8

The width of the report sidebar may be adjusted by dragging the vertical divider bar using the mouse (left-click and hold). The selected width will be preserved if the report sidebar is closed and then reopened.



38.4 FS_CATALOG: New Entry Form Is Opened Immediately 5.2R19

The input component for catalog lists (FS_CATALOG) allows creation and maintenance of content lists. The entries of such a list may be sections or links.

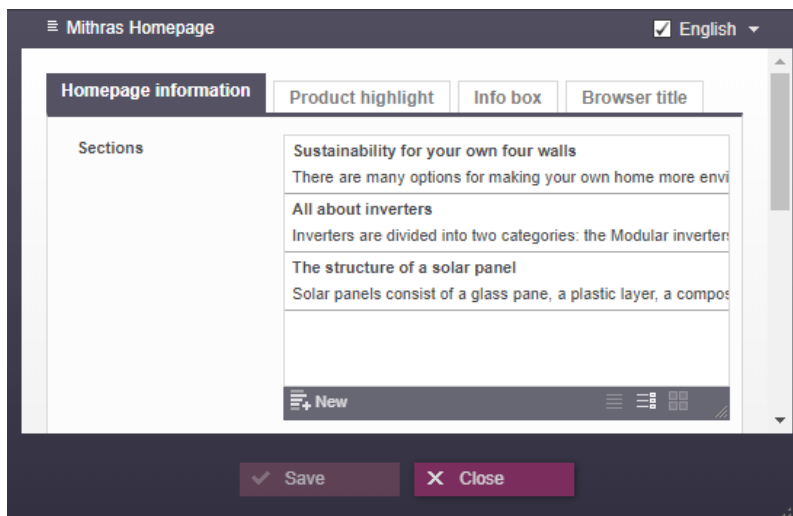

Clicking the button “New” (and selecting the desired template, if necessary)




previously only resulted in the addition of the new entry to the catalog list. Now, the form associated with the new entry is opened immediately so that the editor may directly input the desired content.

For further information, see *FirstSpirit Manual for Editors (ContentCreator)*, “Editing the preview page / Standard input elements / Catalog lists (FS_CATALOG)”.

38.5 FS_INDEX: multiple selection possible in selection dialog 5.2R20

The input component for index lists (FS_INDEX) supports multiple selection of entries. Via the selection dialog, several elements can now be selected from the connected data source and added to the index list at once.



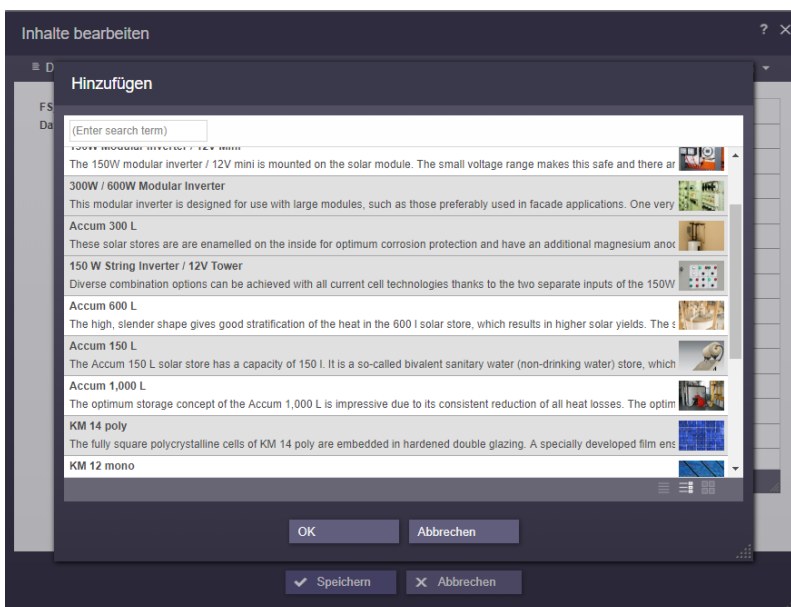

Any restrictions on the number of entries in the list component that may be defined in the template will not be considered during selection.

38.6 Filter in FS_REFERENCE via <SOURCES> 5.2R3

The input component FS_REFERENCE enables referencing of one element selected by a user. Selection of an element for referencing may be limited to specific stores and/or folders by using the tag <SOURCES>.

In rare cases, special configurations could lead to erroneous behavior in ContentCreator: in such cases, not all elements eligible for selection were displayed. This behavior was corrected in FirstSpirit version 5.2R3.

Due to this fix, it is recommended that existing uses of FS_REFERENCE configurations with a <SOURCES> tag be checked to ensure that element selection controls associated with FS_REFERENCE components display the desired set of elements in allowed sources and omit elements that are not in allowed sources.

For further information, see

- *FirstSpirit Online Documentation*, “Template development / Forms / Input components / REFERENCE”



- *FirstSpirit Manual for Editors (ContentCreator)*, “Editing the preview page / Standard input elements / Reference selection”

38.7 Identification of user interface elements 5.2R7

As of the current FirstSpirit version, user interface (UI) elements in ContentCreator (e.g. menus “Contents”, “Media”, and “Actions”; menu entries; input components; and report parameters) are identified in HTML. This supports better identification of these elements, e.g. for UI tests.

38.8 Improved performance when displaying datasets in input components 5.2R4

The input component CMS_INPUT_LIST allows selection of values which have been defined by project developers. When used in conjunction with CMS_INCLUDE_OPTIONS, database content can be displayed within the input component, e.g.

```
<CMS_INPUT_LIST name="IDENTIFIER">
  <CMS_INCLUDE_OPTIONS type="database">
    <LABELS>
      <LABEL lang="">#item.COLUMN</LABEL>
    </LABELS>
    <TABLE>NAME_OF_TABLE_TEMPLATE</TABLE>
  </CMS_INCLUDE_OPTIONS>
  <LANGINFOS>
    <LANGINFO lang="" label="Dataset selection"/>
  </LANGINFOS>
</CMS_INPUT_LIST>
```

In ContentCreator forms, depending on the browser, display of such an input component which references a data source that contains many datasets may be slow. As of FirstSpirit 5.2R4, the display is thus limited to 100 entries. If more than 100 datasets are available, the following message will be shown in the form: “The list of available entries has been truncated due to browser limitations. This input component is not suitable for lists of this size.” Please note that rules will only be applied to the entries displayed in the form.

It is recommended to use FS_INDEX (with an implementation of DataAccessPlugin) instead of CMS_INPUT_LIST.



For further information about CMS_INPUT_LIST, CMS_INCLUDE_OPTIONS, and FS_INDEX, see *FirstSpirit Online Documentation*,

- “Template development / Forms / Input components / INDEX”
- “Template development / Forms / Input components / LIST”
- “Template development / Forms / Data elements / OPTIONS / DATABASE”

38.9 Move sections into other content areas 5.2R2

If sections in ContentCreator could previously only be moved within the same content area, then it is now possible to also move them beyond content area boundaries.




Prerequisite: The section template for the section being moved must be approved for the content area it is being moved to.

For more information

- on working with sections in ContentCreator, see the *FirstSpirit Manual for Editors (Content-Creator)*, “Editing a preview page / Sections”
- on defining allowed section templates for a content area, see the *FirstSpirit Online Documentation*, “Templates (Basics) / Composition of templates / Page templates / Properties tab”


38.10 Project-specific action menu 5.2R6

As of the current FirstSpirit version, a project-specific actions menu can be offered to editors who use ContentCreator.



Configuration is carried out directly within ContentCreator, via the entry “Configure actions” in the menu. This requires project administrator privileges.



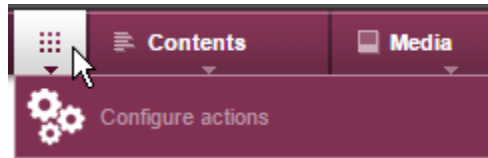

In the dialog which opens, the administrator may select the actions which should be available to all editors in this menu in this project (see also *FirstSpirit Manual for Editors (ContentCreator)*, page “Content-Creator menu functions”):



The set of selectable actions includes those that are offered by plug-in components implementing the interface `de.espirit.firstspirit.webedit.plugin.WebeditToolBarActionItemsPlugin` for the current project. The individual action items themselves are implementations of the interfaces `ExecutableToolBarActionsItem` or `ClientScriptProvidingToolBarActionItem` (both in the package `de.espirit.firstspirit.webedit.plugin.toolbar`). The icons shown in the actions menu are specified by the implementations of the two toolbar actions item interfaces and should be sized 40x40 pixels for optimal display. If no icon is defined for an action, the first letter of the item will be used. See also *Plug-In Development / ContentCreator Extensions / Interactive Features / Toolbar Menu Items / Functional Overview* (→*FirstSpirit Online Documentation*).



These buttons may be used to reorder actions. In the menu, the actions will be shown to editors in an order analogous to that in the dialog “Configure actions for all users”.



Pressing this button removes the associated action from the project-specific menu. Optionally, actions can be deactivated via the list that is shown when clicking “Add action”.

38.11 Selection dialog for next editor(s) of a workflow 5.2R4


In FirstSpirit, a workflow is always a sequence of tasks or work steps which are carried out in a given order. Each task can be assigned to a user or a group of users. The workflow controls the logical



sequence of individual tasks so that only the currently appropriate task can be carried out. If a user completes one task, another user responsible for carrying out the next task is automatically notified.

In ContentCreator, workflows can be started and transitions within an active workflow can be triggered using the page status display (e.g. “Modified page”, “In workflow”) in the ContentCreator toolbar. In the activity dialog for this workflow, the option “Next editor” may be used to define which user or user group should be notified that the workflow has been transitioned to the next task.

To this end, the user's name may be entered directly into the “Next editor” text box, or a drop-down list showing a number of available users can be opened by simply clicking on this text box. As of FirstSpirit version 5.2R4, users may also open a larger selection dialog by either clicking on the magnifying glass icon in the text box or by clicking on the entry “Show more entries...” at the bottom of the drop-down list:

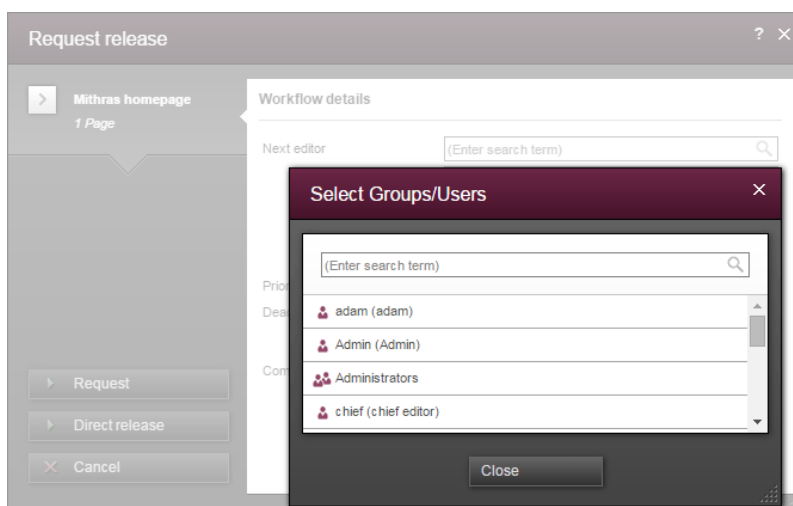

Dialog "Select Groups/Users"

This dialog lists all available users and user groups and supports search functionality. By clicking on the user or group's entry in the list, this user or group is selected, and the dialog closes automatically, adding that user or group to the “Next editor” field in the activity dialog.


For further information, see *FirstSpirit Manual for Editors (ContentCreator)*, “Report area / Tasks / Workflows”.



38.12 Stepless Resizing of the Input Component "Link-Sensitive Graphic" (CMS_INPUT_IMAGEMAP) 5.2R3

Using the input component "Link-Sensitive Graphic" (CMS_INPUT_IMAGEMAP), link areas may be placed over a background image.

Starting with FirstSpirit version 5.2R3, the height of this input component may be adjusted by dragging the resize handle in the lower right corner of the input component.

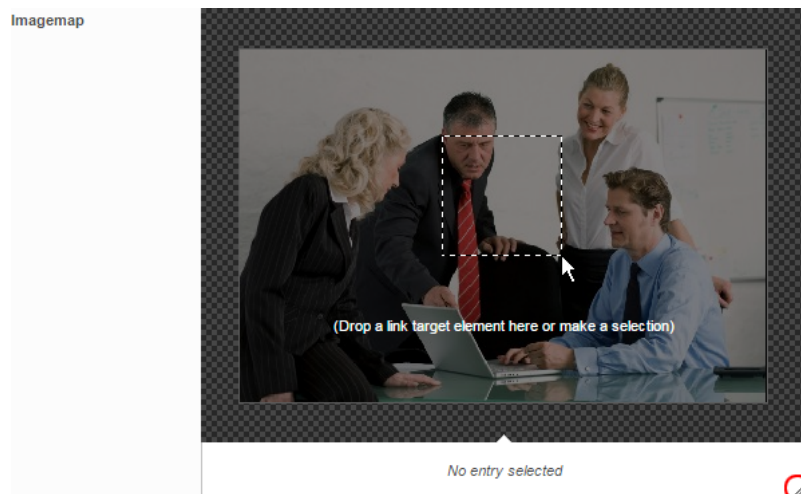

The minimum height of this input component is 340 pixels.

For further information, see

- *FirstSpirit Manual for Editors (ContentCreator)*, "Editing a preview page / Input elements / Imagemap",
- *FirstSpirit Online Documentation*, "Template development / Forms / Input components / IMAGEMAP"


38.13 Visualization of frequently used objects 5.2R2

The ability to reuse content in content management systems ensures significant time and cost savings, reduces errors, and thereby increases the overall quality of the website. With this in mind, it is also possible to use a variety of objects such as images, sections, pages, and datasets several times in




FirstSpirit; in other words, this content may appear in several places on the site. This means that changes to an object that are made on a preview page may affect other pages too.

With FirstSpirit version 5.2R2, the editor can now see – at various points of the editing process – that the object currently being edited is used on other pages (the same as the “Show usages” context menu function in SiteArchitect) so that changes may also be made there. An example of this can be found when editing media in a reference selection input element (“FS_REFERENCE”):

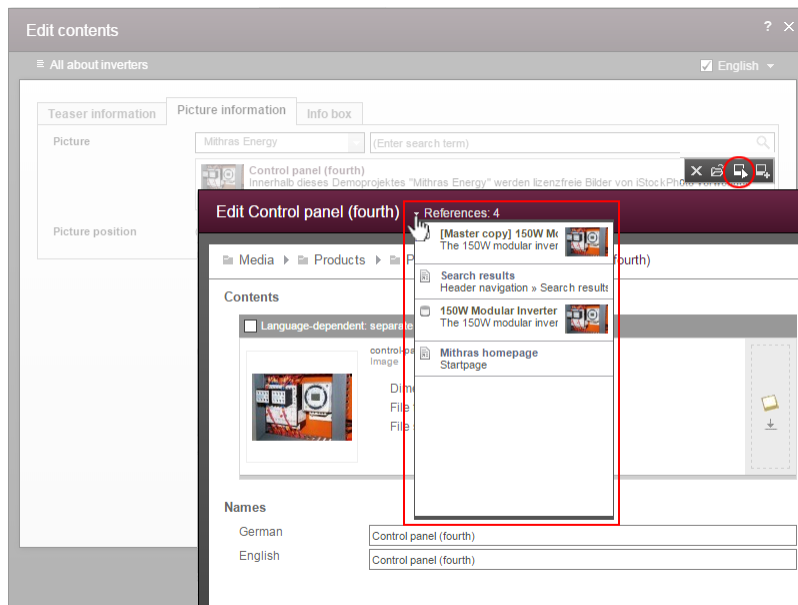

It can also be seen in a dialog for editing a dataset:



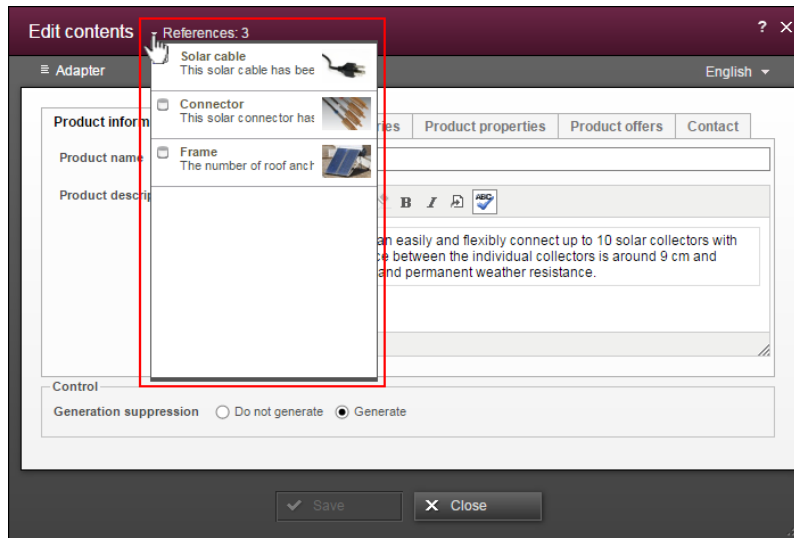

The number next to “References:” indicates the number of places (e.g., pages and/or datasets) where the object appears. In the case of referenced pages, it also includes the page which the editor is currently viewing.


Clicking on “References:” opens a window listing the pages by name together with an object type icon.

For more information, see *FirstSpirit Manual for Editors (ContentCreator)*.

38.14 Workflows on media and media folder elements 5.2.611, 5.2R7

In the report area, the report “Tasks” shows the tasks that are available to the current user. In addition to media elements, as of the current FirstSpirit version, this report also displays media folder elements that are in a workflow:



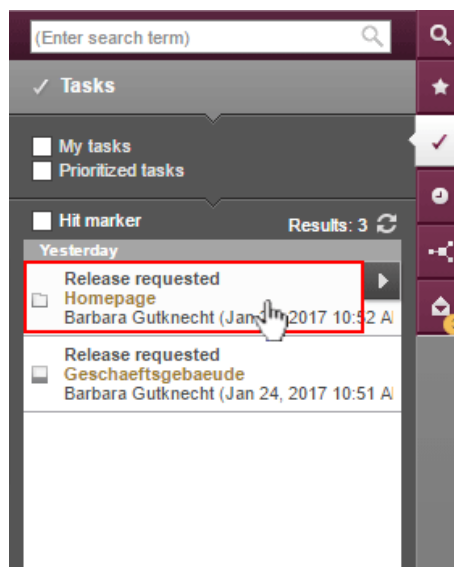

Clicking on a media folder entry will open the dialog “Manage media”.

In order to advance media and media folder elements in a workflow, use the following button:



Clicking the button will open a drop-down menu that shows the available next steps in the workflow. Clicking on an entry in that menu (e.g. “check release”) will open the dialog to set information for the next workflow step.

For further information, see *FirstSpirit Manual for Editors (ContentCreator)*, chapter “Report area / Tasks”.

39 External Synchronization / Content Transport


39.1 Export of database schema information has been modified 5.2R13

By using the keyword `COMMON` it is possible to export or import the properties of a project:

```
fs-cli export projectproperty:COMMON
```



The current FirstSpirit version does not transmit information about layers used by the project anymore (FirstSpirit ServerManager, “Project properties/ Databases”):

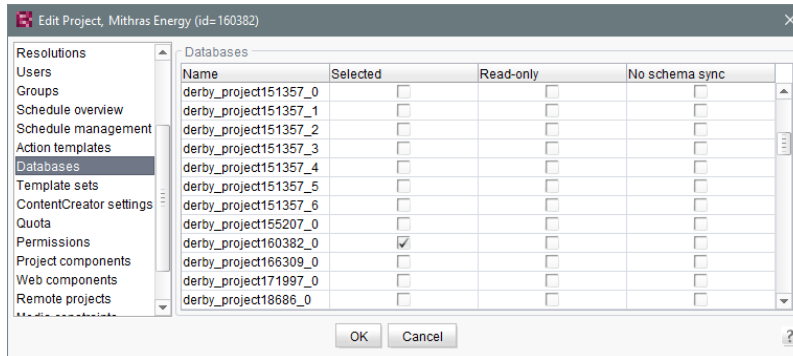

- “Selected”
- “Read-only”
- “No schema sync”

This change also affects FirstSpirit Content Transport.

40 External Synchronization

40.1 Consideration of Custom Properties in External Synchronization

5.2R17

The method `setCustomProperties` (interface `Project`, package `de.espirit.firstspirit.access.project`, FirstSpirit Access API) may be used to set custom project properties (“custom properties”). These may be relevant e.g. in the context of FirstSpirit CaaS.

As of the current version of FirstSpirit, such custom properties may now be synchronized using “FirstSpirit External Synchronization”. To this end, a new `ProjectPropertyType` (enum `PropertiesTransportOptions.ProjectPropertyType`, package `de.espirit.firstspirit.transport`, FirstSpirit Developer API) was introduced:

CUSTOM_PROPERTIES



Example command line call:

```
fs-cli -p DevProject -sd "D:\Git\DevProject" export projectproperty:CUSTOM_PROPERTIES
```

This call causes the inclusion of custom project properties in the export.

40.2 Deletion of obsolete files and additional logging 5.2R7

In the course of expanding and optimizing the feature set of the FirstSpirit functionality “External Synchronization”, as of the current FirstSpirit version, the default value of the method `setDeleteObsoleteFiles(boolean enable)` of the interface `ExportOperation` (FirstSpirit Developer API, package `de.espirit.firstspirit.store.access.nexport.operations`) has been changed from `false` to `true`.

Example

Initial situation in the project:

```
PageStore  
|-- PageFolder 'A'  
`-- PageFolder 'B'
```

1. Export: Export of 'A'

In the synchronization directory, the following structure will be created:

```
Synchronization Directory  
|-- .FirstSpirit  
|   |-- ...  
|-- PageStore  
|   |-- 'A'  
|       |-- StoreElement.xml  
|       |-- ...
```

2. Export: Export of 'B' ('A' is not included in the export set)

In the synchronization directory, the files previously created for 'A' will be deleted. The file structure will subsequently look as follows:




```
Synchronization Directory
|-- .FirstSpirit
|   |-- ...
|-- PageStore
|   |-- 'B'
|       |-- StoreElement.xml
|       |-- ...
```

If the files for 'A' should be retained, both elements ('A' and 'B') must be added to the `ExportOperation` and exported via this operation:

2a) Export of 'A' and 'B'

The file structure will subsequently look as follows:

```
Synchronization Directory
|-- .FirstSpirit
|   |-- ...
|-- PageStore
|   |-- 'A'
|       |-- StoreElement.xml
|       |-- ...
|   |-- 'B'
|       |-- StoreElement.xml
|       |-- ...
```

(Generally, during use of the functionality “External Synchronization”, only files will be removed that have been created by this functionality.)

Previously, such files were retained by default. This potentially led to the retention in the file system of files associated with elements that have been deleted in FirstSpirit. Existing scripts may require modification.

In this context, **export logging** has been expanded to help better identify which parameters were set for an export. Now, the following parameters and their set values will be output via INFO logging:

- `deleteObsoleteFiles` (method `setDeleteObsoleteFiles(true|false)`)
- `exportRelease` (method `setExportRelease(true|false)`)
- `exportParents` (method `setExportParentElements(true|false)`)



- `exportChildren` (method `setExportChildElements(true|false)`)

Example (all in one line):

```
ExportParameters = { deleteObsoleteFiles=false, exportRelease=true,  
exportParents=true, exportChildren=true, [...] }
```

40.3 Detection of empty directory structures (missing meta files) 5.2R14

Especially when using “FirstSpirit External Synchronization” in distributed development, empty directory structures (i.e. directories without meta files `FS_Files.txt`, `FS_Info.txt`, `FS_References.txt`, `StoreElement.xml`, etc.) may remain, e.g. due to moving folders in FirstSpirit. In this case, the FirstSpirit objects in the file system will no longer be recognized as such.

If these meta files are missing, an error message will be output if an export or an import is attempted, and the export/import will be prevented. If `deleteObsoleteFiles` is set to “true”, an export will only log a warning.

40.4 Export: Additional information about exported files (interface "ExportOperation.Result") 5.2R14

In addition to providing information about files which were created in, deleted from, or updated in the file system during an export, the interface `ExportOperation.Result` now includes newly implemented methods which provide information about moved files as well as other information (FirstSpirit Developer API, package `de.espirit.firstspirit.store.access.nexport.operations`, interface `ExportOperation.Result`).

When using **FSDevTools** (recommended best practice), this information will already be evaluated and displayed in the log.

40.5 Export: Explicitly and implicitly selected objects 5.2R14

Because “External Synchronization” is designed for synchronization of partial trees between projects, for each FirstSpirit object that is exported via the “External Synchronization” functionality, the following objects will also be exported:



- all parent objects of the exported object
- all child objects of the exported object

This leads to a distinction between explicitly and implicitly selected objects:

- **Explicit:** The object selected for export as well as all child objects
- **Implicit:** The chain of parent objects of the object selected for export

During an import, explicitly exported objects will be created in the target project if they are not present there and will be updated (i.e. overwritten with each object's respective state in the source project) in the target project if they are already present.

Implicitly exported objects, however, will now only be created in the target project during an import if they are not present there and will no longer be updated if they are already present. Previously, implicitly exported objects were overwritten in the target project with each object's respective state in the source project even if they were already present in the target project.

40.6 Export: Folder "Lost & Found" will no longer be exported 5.2R14

"Lost & Found" folders are created as needed directly underneath the root node of a store in a target project if a parent element (folder) is exported from a source project and imported ("updated") into a target project, but the child elements of this folder are only present in the target project.

Previously, during an export, such "Lost & Found" folders were exported if they were selected for export. As of the current FirstSpirit version, these folders will by default no longer be exported.

This behavior may be controlled via the method `setExportLostAndFound(boolean enable)` of the interface `ExportOperation` (package `de.espirit.firstspirit.store.access.nextport.operations`, FirstSpirit Developer API). The default value is `false`.

40.7 External Synchronization: More stable identification of objects (using GIDs) 5.2R12

The identification of objects via the functionality "External Synchronization" now uses GIDs ("global IDs"). GIDs are project data that are used internally for object referencing. As opposed to UUIDs, GIDs are not



affected by manual changes, such as renaming an object in either source or target projects, and thus allow for more stable behavior when exporting or importing objects.

Previous behavior: When importing an object from a source project into a target project, External Synchronization attempted to identify a matching object in the target project using the UID. If an object was identified, modifications to that object in the target project were overwritten. If no object could be identified, the object was created in the target project.

Changes to the UID of the object in either the source or the target projects had the effect that, during a subsequent import into the target project, a matching object could not be identified, always leading to *creation of a new object* in the target project.

Current behavior: When importing an object from a source project into a target project, External Synchronization now attempts to identify a matching object in the target project using the GUID. If an object is identified, modifications to that object in the target project will be overwritten. Even if the UID of the object was changed, the object can now be identified in the target project. If no matching object can be identified using the GUID, an attempt will be made to identify a matching object using the UID (see “Previous behavior”).

40.8 GUI will be omitted 5.2R4

Previous feedback and experience show that the external synchronization, which has been provided since FirstSpirit 5.1, is mainly used programmatically in the context of a distributed development process - instead via the GUI within the SiteArchitect. For this reason we decided to omit the GUI with FirstSpirit 5.2R4.

We ask all customers and partners to switch their development process to our API or to the command line tool “FSDevTools”. It encapsulates the existing API and can be used via the command line or an IDE.

Please contact our Technical Support if any problem occurs while changing your development process.

Further information can be found in the [Community](#).

40.9 General changes to the data format 5.2R14

In the course of export format readjustment, an export will now only create one directory named `.FirstSpirit` at the highest directory level instead of creating several directories of that name.



If exports have been made using “External Synchronization” in earlier versions of FirstSpirit, the first export with the current version of FirstSpirit will remove all existing subdirectories named `.FirstSpirit` from the external synchronization directory in the file system. Only one directory named `.FirstSpirit` will remain, at the highest directory level.

In order to create the new export format after an upgrade from an earlier version of FirstSpirit, it is stringently required to perform a new export with the option `deleteObsoleteFiles` activated. (If **FSDev-Tools** are used (recommended best practice), this option is activated by default.)

The directory `.FirstSpirit` at the highest directory level contains internal meta information for successful synchronization of external content with the FirstSpirit project. **When using a version control system, this directory should not be versioned!**

Furthermore, the contents of the files `Info.txt` and `Files.txt`, which also contain internal meta information, have been changed, and the files have been renamed to `FS_Info.txt` and `FS_Files.txt`, respectively. In this context, the format of the file `Entities.xml`, which contains contents of datasets, has been changed as well.

40.10 Import: Abort in case of required but missing objects 5.2R14

Many objects in FirstSpirit projects have dependencies to other projects, also called “references”. Among others, one goal of a successful use of “FirstSpirit External Synchronization” is to export partial trees from one project into another which will be functional in the target project. This means that the objects referenced by an exported object must be exported as well. There are two types of dependencies:

- **Required missing references:** referenced objects which are necessary in order to export a complete and functional partial tree of a project. E.g. if a page is exported, the templates upon which the page is based are required so that the page can be displayed in another FirstSpirit project following an import. The user must ensure that the required dependencies are present in the target project.
- **Optional missing references:** referenced objects which are referenced by an exported object but which are not necessary in order to export a complete and functional partial tree of a project. E.g. if a page is exported, the media objects referenced by this page are not necessary to display the page itself in the target project following an import and thus do not have to be included in the export/import.



During an import, dependencies will now be checked and the import will be aborted if this import would cause required missing dependencies in the target project. In this case, a `ValidationException` will be thrown. This exception provides information about the required missing dependencies in the target project. Until now, the import was carried out without throwing an exception.

In the course of this behavioral change, the FirstSpirit Developer API interfaces

- `FeatureError` (package `de.espirit.firstspirit.store.access.feature`)
- `SyncOperationException`
(package `de.espirit.firstspirit.store.access.nexport.exceptions`)

have been extended.

40.11 Import: Deletion of objects 5.2R14

Deletion of objects in one project will now be correctly regarded during an import into other projects. This means that objects which have been deleted in the project of developer A will now also be deleted in the project of developer B during an import of the respective state.

If there are still required inbound references to such deleted objects, these objects will be moved to the folder “Lost & Found”. (Required references are dependent objects which are required for the functionality of an object in the target project, e.g. the page template (Templates store), which is required for the existence of a page (Page Content store), or the page (Page Content store), which is required for the existence of a page reference (Site Structure store).

Previously, objects deleted in the source project were not deleted in the target project upon import.

This behavior now also applies to the functionality “FirstSpirit ContentTransport”. Here, objects which did not have required inbound references were moved to the folder “Lost & Found”. Now, they will be deleted.

40.12 Import: Identification of new and modified datasets using API (interface "ImportOperation.Result") 5.2R14

As of the current version of FirstSpirit, the method `getCreatedEntities()` of the interface `ImportOperation.Result` (FirstSpirit Developer API, package `de.espirit.firstspirit.store.access.nexport.operations`) has been optimized: when importing datasets, it now only considers



datasets which have been newly created since the last import. Previously, it also considered modified datasets.

Modified datasets may now be identified using the newly implemented method `getUpdatedEntities()`. Datasets which have not been modified since the last import will now not be considered by the methods `getCreatedEntities()` and `getUpdatedEntities()` during a subsequent import.

For datasets from tables with 1:N or M:N relations, the methods `getCreatedEntities()` and `getUpdatedEntities()` will always consider **both** datasets of the relation (thus, a minimum of two datasets).

When using **FSDevTools** (recommended best practice), this information will already be evaluated and displayed in the log.

40.13 New method "getModifiedProjectProperties" returns imported project properties 5.2R4

Using the functionality "External Synchronization", structures of a FirstSpirit project (e.g. templates, partial store trees, project properties) can be exported into a file system, creating a folder hierarchy which reflects the project's structures. Export and import is carried out using interfaces and methods of the FirstSpirit Developer API.

In addition to the project content that is entered in SiteArchitect and/or ContentCreator, project properties can also be exported/imported with the "External synchronization" function, including across servers. This method can be used, for example, to transfer the properties of a project to an empty project as well as to synchronize the project configuration of multiple projects.

You can use the method `getModifiedProjectProperties()` of the interface `ImportOperation.Result` (FirstSpirit Developer API, package `de.espirit.firstspirit.store.access.n-export.operations`), which has been introduced with FirstSpirit version 5.2R4, to identify if and which type of project settings were imported (for example template sets).

40.14 New method "setExportRelease" to specify whether the release or the current state of elements should be exported 5.2R4

FirstSpirit version 5.2.313 introduces a new method, `setExportRelease(boolean)`, in the interface `ExportOperation` (package `de.espirit.firstspirit.store.access.nex-`



`port.operations`), which can be used to specify whether the “release” or the “current” state of selected elements should be exported.

In the same FirstSpirit version, the method `setExportReleaseEntities(boolean)` in the interface `ExportOperation` has been marked “deprecated” and may be removed in future versions. Uses of this method should be replaced with `setExportRelease(boolean)`. Methods set to the “deprecated” state can still be used, but as they will be omitted in subsequent versions, this is not advisable. If methods, classes, and interfaces that are no longer supported or are set to deprecated are used in scripts and/or modules, entries are written to log files accordingly (e.g., server log, generation log, etc.). The corresponding log entries should be checked and the cause(s) remedied.

40.15 New method "setIgnoreEntities" replaces "setCreateEntities" 5.2R4

The interface `ImportOperation` (FirstSpirit Developer API, package `de.espirit.firstspirit.store.access.nexport.operations`) provides methods with which files may be imported from an external file system into a FirstSpirit project based on customer-specific rules using the functionality “External Synchronization”.

The method `setIgnoreEntities(boolean ignore)` replaces the method `setCreateEntities`, which has been deprecated as of FirstSpirit version 5.2R4. The new method controls whether existing entities should be imported into the FirstSpirit project.

The default setting is `false`, which causes External Synchronization to import all entities that are currently stored in the file system into the FirstSpirit project, updating existing entities in the project to reflect the data imported from the file system or, if necessary, creating new entities with that data. In order to suppress import of entities from the file system into the project and preserve the entities that exist in the project, call `setIgnoreEntities(boolean ignore)`, providing the `ignore` value `true`.

For further information, see

- *FirstSpirit Online Documentation* “Advanced topics / External synchronization”
- FirstSpirit Developer API, package `de.espirit.firstspirit.store.access.nexport.operations`



40.16 Optimized performance 5.2R2

“External synchronization” is used to export substructures from FirstSpirit (e.g., templates, store subtrees, project properties) in a file system structure with a folder hierarchy. FirstSpirit version 5.2R2 optimized performance when adding elements via the user interface.

For more information on the “external synchronization” function, see *FirstSpirit Online Documentation*, “Advanced topics / External synchronization”.

41 General

41.1 Code signing certificate updated 5.2R5

The content of FirstSpirit JAR files is signed with a certificate. This procedure is also called “code signing”. In the current FirstSpirit version, the content is signed with a new certificate that is valid until 2018-06-13 (13 June 2018).

Please refer also to Chapter 1 “Code signing certificates”.

41.2 Code signing certificate updated 5.2R9

The content of FirstSpirit JAR files is signed with a certificate. This procedure is also called “code signing”. In the current FirstSpirit version, the content is signed with a new certificate that is valid until 2019-07-24 (24 July 2019).

Some certificates used by existing FirstSpirit servers expired on 2017-05-21 (21 May 2017), affected FirstSpirit servers must be updated.

41.3 Databases: Support for Microsoft SQL Server 2016 and data type "ntext" 5.2R10

FirstSpirit has been designed as an enterprise content management system for application in complex IT landscapes, and supports various operating systems, Java runtime environments, and databases.

As of the current FirstSpirit version, **Microsoft SQL Server**, version **2016**, is now officially supported for use with FirstSpirit as a database server running on Windows servers.



This means that reference versions of Microsoft SQL Server are versions 2014 and 2016. Versions 2008 and 2012 are passively supported. Support for Microsoft SQL Server 2005 has ended.

For further information, see *FirstSpirit Technical Datasheet*.

Because the data type `ntext`, which is used by Microsoft SQL Server, has been marked “deprecated” by the manufacturer (see <https://docs.microsoft.com/en-us/sql/t-sql/data-types/nchar-and-nvarchar-transact-sql>), the column type for XML data in FirstSpirit (column type “FirstSpirit-Editor”, “SiteArchitect / Database schemata / Database schema / Create column / Data type”) was changed from using `ntext` to using `nvarchar(max)`. This complies with Microsoft's recommendation. This means that contents of the column type “FirstSpirit-Editor” will now be mapped to `nvarchar(max)` and no longer to `ntext`. Existing columns which use the type `ntext` are not affected by this change: in existing projects, these will continue to be mapped to `ntext`.

41.4 Databases: Support for MariaDB 5.2R12

FirstSpirit has been designed as an enterprise content management system for application in complex IT landscapes, and supports various operating systems, Java runtime environments, and databases.

As of the current FirstSpirit version, MariaDB (cf. also to <https://mariadb.org>) is officially supported for use with FirstSpirit, in version 10.1. Reference version is 10.1.23.

Note: Please use the MySQL JDBC driver for MariaDB (`mysql-connector-java-x.x-bin.jar`).

For further information, see *FirstSpirit Technical Datasheet* and *FirstSpirit Server configuration / Database connection / Examples of application* (→*Documentation for Administrators*).

41.5 Main memory requirements for FirstSpirit SiteArchitect 5.2R15

As of the current FirstSpirit version, the standard value for maximum heap size (Xmx) of FirstSpirit SiteArchitect was increased to 1024MB. Thus, FirstSpirit SiteArchitect now requires at least 1024MB of free main memory, as opposed to the previously required 768MB.

For further information, see *FirstSpirit Technical Data Sheet*.



41.6 Publication of FirstSpirit Javadoc via separate Jar files 5.2R9

Javadoc is used for documenting the FirstSpirit API. Starting with the current FirstSpirit version, this documentation is published additionally in separate Jar files (`fs-api-javadoc.jar` and `fs-isolated-runtime-javadoc.jar`), for example in order to make it easier to access it from IDEs.

42 Input components

42.1 Dynamic Forms: New Property "PRESET" 5.2R17

In templates, form defaults for input components may be specified by clicking the icon



in the "Form" tab of the respective template; this opens the dialog "Edit form defaults".

The new property `PRESET` may be used to determine if the user is currently editing in this dialog:

```
<PROPERTY name="PRESET" source="#global"/>
```

This expression returns `TRUE` if the user is currently editing in the dialog "Edit form defaults", otherwise it returns `FALSE`.

For further information, see *FirstSpirit Online Documentation*, chapter "Template development / Rules / Form properties `<PROPERTY/>` / Property `PRESET`".

42.2 Extended snippet access for `FS_INDEX` and `FS_CATALOG` 5.2R4

The "Snippets" can be used in many places in FirstSpirit: e.g., when displaying FirstSpirit objects in search results, in reports, and also to display entries in `FS_CATALOG` and `FS_INDEX`. In the definition of snippets (in templates) the template developer can specify what information about the FirstSpirit object is to be used in search results, reports, etc. and thus customize the content to meet the specific needs of editors and the conditions of the project concerned.

The following additions have been made to this area with FirstSpirit version 5.2R4:

FS_CATALOG: Simplified access to values using dot notation (`getItems` method)

The `FS_CATALOG` input component can be used to create and manage lists of sections or links.



It returns a `Catalog` object which contains `Card` objects. A `Card` object represents an entry in `FS_CATALOG` and contains information about

- the section or link template selected by the editor for this entry,
- the form fields defined in the selected template,
- the values saved by the editor in the form fields.

The new `getItems` method (in Bean syntax: `.items`) can be used to access `Card` data more directly and work with this data. It returns a list (`List` data type) of `FormData` objects:

```
FS_CATALOG_VAR.items
```

In order to be able to identify and output the value of a certain input component (`FormField`) in this list for a snippet definition, for example, both the identifier of the required input component and its position in the list must be specified:

```
FS_CATALOG_VAR.items[0].st_text
```

In this example, the value of “`st_text`” of the 1st entry in the `FS_CATALOG` component is identified with the “`FS_CATALOG_VAR`” identifier.

(This method is not only available in snippet definitions.)

FS_CATALOG: Access to snippets of entries (`getSnippets` method)

The new `getSnippets` method (in Bean syntax: `.snippets`) can now be used to access snippet values of the entries of an `FS_CATALOG` component. Instead of the identifier of the required input component (e.g., “`st_text`” for a `CMS_INPUT_TEXT` component), only the field of the snippet definition has to be specified when using `getSnippets`:

- *thumbnail* outputs the value of the “Thumbnail” field
- *header* outputs the value of the “Header” field
- *extract* outputs the value of the “Extract” field

of the snippet definition of the corresponding entry of the `FS_CATALOG` component.



The method returns a list (“List” data type). The required element of the list can be returned by specifying the position number (in square brackets, counting starts at 0).

Example:

```
FS_CATALOG_VAR.snippets[0].thumbnail  
FS_CATALOG_VAR.snippets[0].header  
FS_CATALOG_VAR.snippets[0].extract
```

The `FS_CATALOG_VAR.snippets[0].header` call returns the value from the field of the first entry of the `FS_CATALOG` component that is defined in the corresponding section or link template.

(This method is not only available in snippet definitions.)

The new `CatalogAccessor` data type has also been implemented in this context.

FS_INDEX: Access to snippets of a DataAccessPlugin (DAP, getSnippets method)

When an `FS_INDEX` input component is accessed via a `FormData` object, an `Index` type object containing a `Record` object for each entry in the index is returned. The `Index` object can be used both to manage the index entries and to create new entries.


In template set and snippet definitions of templates, by contrast, when an `FS_INDEX` input component is accessed, an `IndexAccessor` type object is returned, which facilitates read access to the `String` identifiers of the entries saved in the component and to the data objects, which correspond to the entries and have been resolved via the `DataAccess` plug-in associated with the index component.

From FirstSpirit version 5.2R4, additional interfaces which are able to display these external data objects in the form of a snippet are available in this area (same as `FS_CATALOG`, see above). The following calls can be used within the snippet definition (notation):

```
FS_INDEX_VAR.snippets[0].thumbnail  
FS_INDEX_VAR.snippets[0].header  
FS_INDEX_VAR.snippets[0].extract
```

The `FS_INDEX_VAR.snippets[0]` call returns a snippet interface for the first DAP entry of the `FS_INDEX` component.



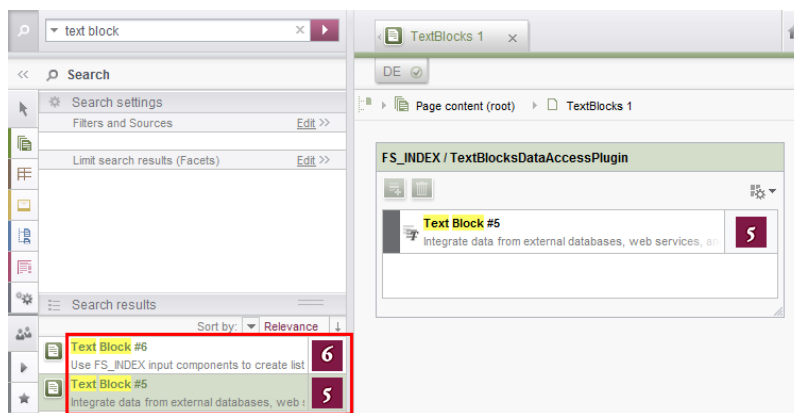

For more information, see *FirstSpirit Online Documentation*,

- “Template development / Template syntax / Data types / CatalogAccessor”
- “Template development / Forms / Input components / INDEX / Access to FS_INDEX”
- “Template development / Template syntax / Data types / IndexAccessor”

42.3 FS_CATALOG: Nesting of language-dependent input components

5.2R5

From the current version of FirstSpirit onwards, the use of language-dependent input components within a language-dependent FS_CATALOG input component will be disallowed by default.

Old behavior

In previous FirstSpirit versions, it was technically possible to configure both FS_CATALOG and inner forms to be language-dependent. This frequently led to problems related to translation processes, general usability of input components for editors, and maintainability of project development as well as to impaired performance. Content entered by the editor into nested, language-dependent FS_CATALOG constructs could (especially so when using translation help) potentially not be output (e.g. during generation) or edited afterwards.

Thus, it was recommended to use language-independent input components within language-dependent FS_CATALOG input components. As a consequence, section templates that were meant to be used within both pages and FS_CATALOG input components had to be duplicated to produce a language-



independent version (for use within language-dependent FS_CATALOG components) and a language-dependent version (for use in all other cases).

New behavior

Starting with the current version of FirstSpirit, all projects created with FirstSpirit version 5.2R5 or newer will by default be configured to disallow the use of language-dependent input components within a language-dependent FS_CATALOG input component. Language-dependent input components in templates that are used within a language-dependent FS_CATALOG component will automatically be treated as language-independent by FirstSpirit. This alleviates the disadvantages imposed by the old behavior.



The old behavior is not recommended, and future versions of FirstSpirit may cease to support it. Migration is recommended.

Compatibility with projects from older FirstSpirit versions

For projects that

- exist on a FirstSpirit server running a previous version that is upgraded to FirstSpirit version 5.2R5 or newer
- are imported from a FirstSpirit server running a previous version to a server running FirstSpirit version 5.2R5 or newer via project import functionality

the old behavior will be supported until further notice. In order to prepare projects that were created in previous versions of FirstSpirit for use with the new behavior, FirstSpirit offers two compatibility settings that allow a stepwise migration.





The data handling used differs between the old and new behavior. If language-dependent input components are used within a language-dependent FS_CATALOG input component in a project, the data of this FS_CATALOG component must be checked and - if necessary - backed up before the new behavior can be used project-wide. Without checks and backups, switching to the new behavior can cause data loss in the project: If the FS_CATALOG component or inner forms of this component already contain content, saving this FS_CATALOG component will cause content to be stored in the language the editor is currently editing (fallback: master language); if content exists in other languages, these language versions will be discarded.


Both compatibility settings have the following effects:

- Compatibility setting “disabled”: Within a *language-dependent* FS_CATALOG input component, inner input components which are configured to be language-dependent in their template will be handled as *language-independent* (new behavior).
- Compatibility setting “enabled”: Within a *language-dependent* FS_CATALOG input component, inner input components which are configured to be language-dependent in their template will be handled as *language-dependent* (old behavior).

Compatibility for **individual FS_CATALOG input components** can be turned off in templates using a parameter, `forbidPolyglotDataHierarchy`. This allows application of the new behavior for single FS_CATALOG input components, while other FS_CATALOG input components for which this parameter is not set will continue to use compatibility with previous FirstSpirit versions.

Once all FS_CATALOG components are prepared for the new behavior, the compatibility setting can be deactivated **project-wide** (“FirstSpirit ServerManager / Project / Properties / Compatibility / FS_CATALOG: Nesting of language-dependent input components”):



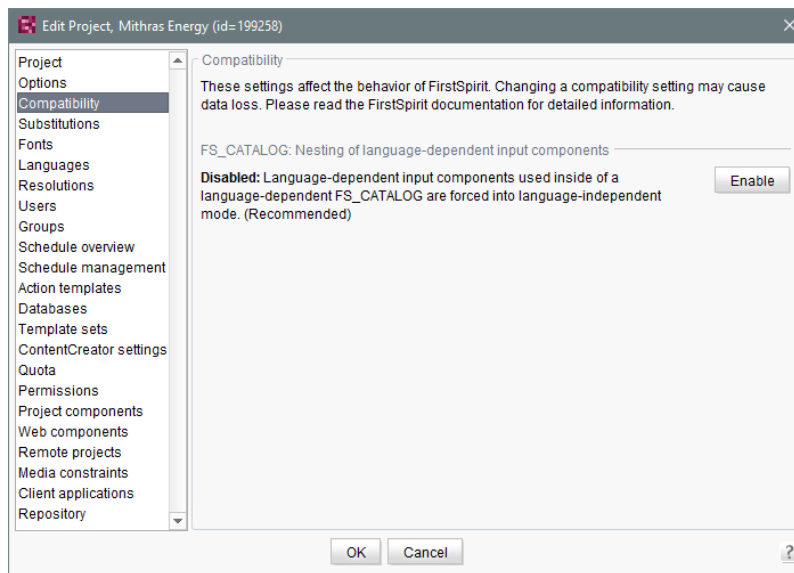

The project-wide compatibility setting affects all language-dependent FS_CATALOG input components in a project.

From FirstSpirit version 5.2R5 onwards, when transporting project properties using “Content Transport” functionality or via a project export, this property will be included in the transport/export.

FirstSpirit API

Additionally, the methods `getForbidPolyglotDataHierarchy` and `setForbidPolyglotDataHierarchy` (FirstSpirit Access API, interface `Project`, package `de.espirit.firstspirit.access.project`) allow access via API to the value set in project properties. `getForbidPolyglotDataHierarchy` returns the currently set value of the compatibility setting “FS_CATALOG: Nesting of language-dependent input components”, while `setForbidPolyglotDataHierarchy` may be used to set this setting's value.

The `ProjectAgent`, obtainable via the `SpecialistsBroker` (both FirstSpirit Developer API, package `de.espirit.firstspirit.agency`), also provides a means to read the current value of the compatibility setting: `getForbidPolyglotDataHierarchy`.

For further information, see

- *Template development / Forms / Input components / CATALOG* (→*FirstSpirit Online Documentation*), parameter `forbidPolyglotDataHierarchy`



- *FirstSpirit Manual for Administrators*, chapter “Compatibility”
- Module documentation for “FirstSpirit CorporateContent”, chapter “Transporting project properties”

42.4 FS_CATALOG: Representing language independent content (link lists) 5.2R16

The FS_CATALOG input component allows to create lists of either sections or links so that editors can maintain multiple sections or links directly within the component, without the need to switch to another input component, another section, and so on. To edit language-dependent contents corresponding tabs are provided.

Forms based on link templates always are language-independent. To provide better clarity, language tabs won't be shown anymore in FS_CATALOG components that allow selecting link templates (<TEMPLATES type="link">).


42.5 FS_INDEX: Editorial functionality using drag-and-drop 5.2.424, 5.2R5

In ContentCreator, users may create sections, datasets, and links (in a rich-text editor or a table / CMS_INPUT_DOM or CMS_INPUT_DOMTABLE) by dragging and dropping content onto a specifically configured FS_BUTTON input component. To achieve this, a

- section template,
- link template, or
- table template

which should be used to create new content via drag-and-drop must be configured to use the desired target input component (tab “Form”) for such drag-and-drop content as its **Drop Editor** (tab “Properties”).




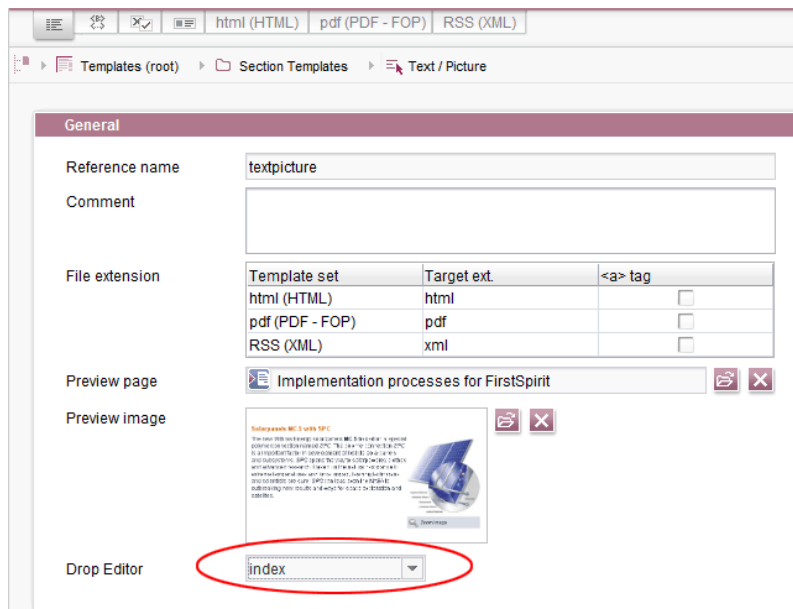

This way, elements provided by a DataAccessPlugin may be used via drag-and-drop in order to create a new section, dataset, or link (in CMS_INPUT_DOM/DOMTABLE). The element dragged and dropped onto the button will then be referenced by a target index component.

If a dataset provided by the DatasetDataAccessPlugin is dropped onto an FS_BUTTON with class NewSection (onDrop="class:NewSection") but is incompatible with any FS_INDEX components listed as drop editors (i.e. it does not match any table template configured for FS_INDEX components, tag SOURCE / TEMPLATE), the operation will be aborted with the error message "The transferred data has not been accepted", and no section will be created. Due to technical reasons, a section will in fact be created and deleted again in the background, such that the page will afterwards be shown as changed.

In addition to the "Add" button and drag-and-drop onto an index component in an "Edit" dialog, it is now also possible to **add new entries to index components** by dragging a compatible dataset from a report (e.g. "Search", "Bookmarks", etc.) or data from a custom report implementation into the preview area.

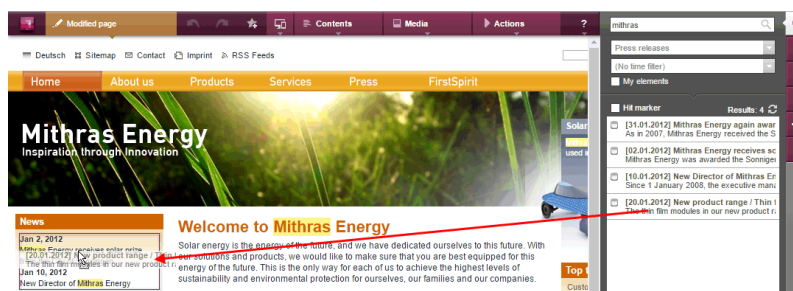

The prerequisite is compatible mark-up added via `editorId`.

(Note: An appropriate preview page (“Properties” tab) must be selected so that datasets will appear in search, bookmarks etc.)

Entries within a form may now also be **replaced** with other compatible data from reports. A colored marker



Replace

or



Move/Insert above


or




Move/Insert left

indicates whether the data would replace an existing entry if dropped:



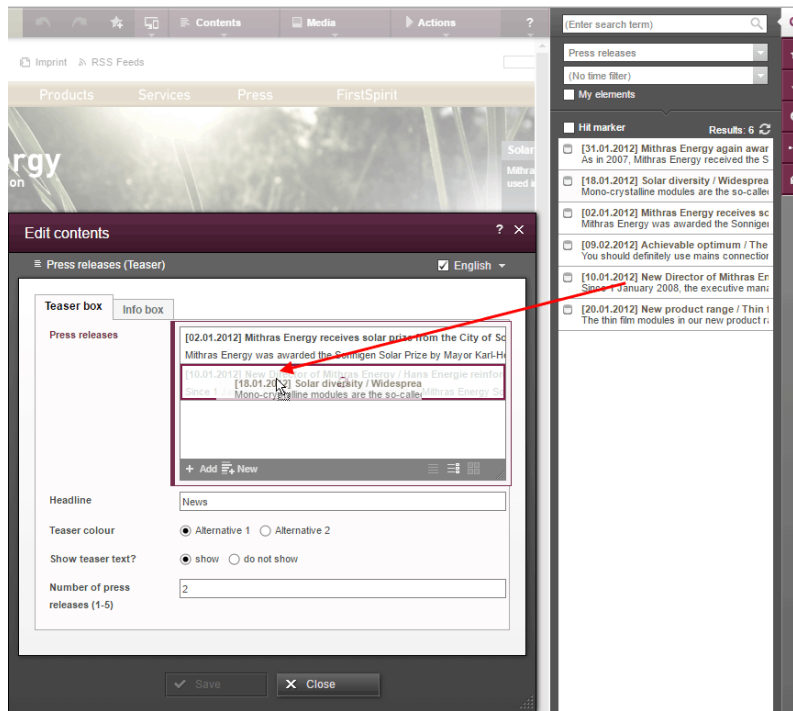


or be added as a new entry:

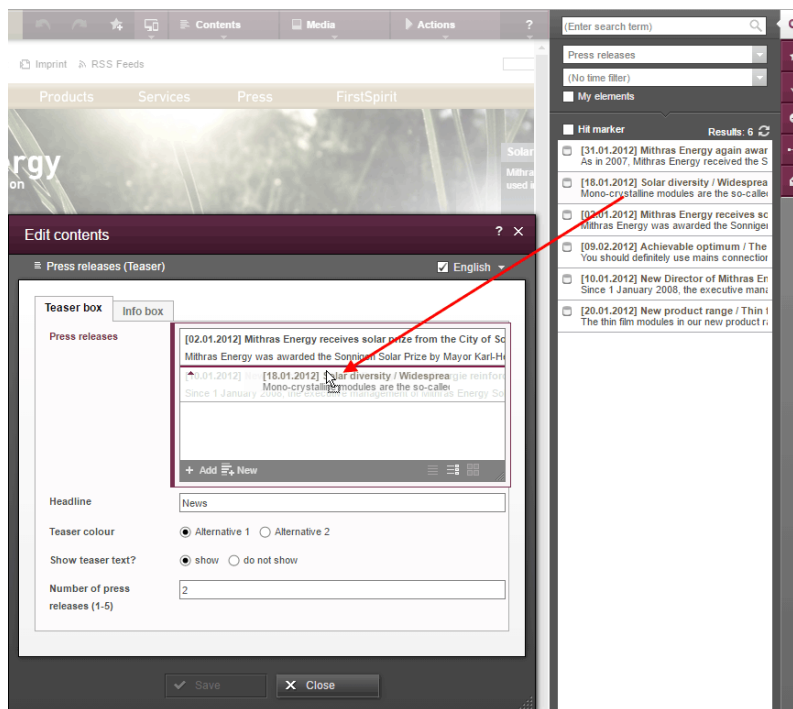


The order of entries may be modified by dropping an element that is already referenced in the component onto the form, but the dropped element will not be referenced twice.

In SiteArchitect, as of the current FirstSpirit version, data may also replace existing entries via drag-and-drop:

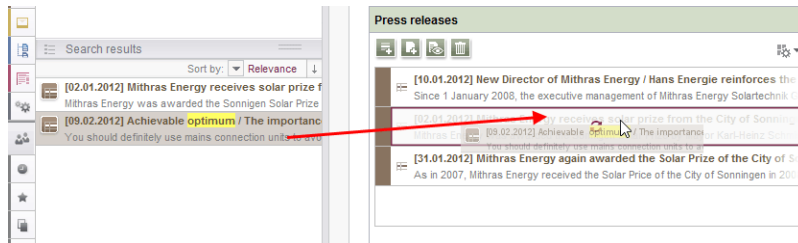

or be added as a new entry:

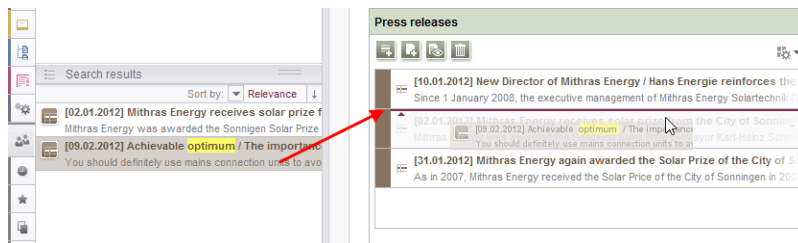

Note for use cases in which only one entry is to be selectable in FS_INDEX: If you would like that the editor can select only one entry within your FS_INDEX component, you can manage this using a rule with the ADD property and a “less than” check (using <LESS_THAN/>), for example

```
<RULE>
  <WITH>
    <LESS_THAN>
      <PROPERTY name="SIZE" source="fs_index"/>
      <NUMBER>1</NUMBER>
    </LESS_THAN>
  </WITH>
  <DO>
    <PROPERTY name="ADD" source="fs_index"/>
  </DO>
</RULE>
```



For technical reasons, starting with FirstSpirit version 5.2R5, the *ADD* rule is disregarded when replacing entries in ContentCreator **in the preview**. For ensuring that only the desired number of entries will not be exceeded, please use a rule with the restriction level *SAVE*, which will be applied when saving the form, for example

```
<RULE>
  <WITH>
    <LESS_THAN>
      <PROPERTY name="SIZE" source="fs_index"/>
      <NUMBER>2</NUMBER>
    </LESS_THAN>
  </WITH>
  <DO>
    <VALIDATION scope="SAVE">
      <PROPERTY name="VALID" source="fs_index"/>
      <MESSAGE lang="" text="The maximum number of entries is exceeded! Max. 1"/>
      <MESSAGE lang="DE" text="Anzahl der Einträge überschritten! Max. 1"/>
    </VALIDATION>
  </DO>
</RULE>
```

If an entry is added to FS_INDEX via the preview in ContentCreator even though there is already an entry, the form will open showing the rule violation (“The maximum number of entries is exceeded! Max. 1”) and it can only be saved if surplus entries have been removed.

For further information, see

- *FirstSpirit Online Documentation*,
 - “Template development / ContentCreator / Functional scope”, section “FS_BUTTON handler classes”
 - “Template development / Rules”
- *FirstSpirit Manual for Editors (ContentCreator)*,
 - “Editing the preview page / Standard input elements / Lists (new, datasets)”
 - “Editing the preview page / The FirstSpirit operating concept”, section “Using drag-and-drop”



- *Documentation for FirstSpirit SiteArchitect, "Default input forms / Index (FS_INDEX)"*


42.6 FS_INDEX: Emptiness check with ".isEmpty"

5.2.611, 5.2R7

The input component FS_INDEX *Template development / Template syntax / Data types / IndexAccessor* (→*FirstSpirit Online Documentation*).

Within output channel definitions, accessing the value set of an FS_INDEX input component returns an object of type `IndexAccessor`.

As of the current FirstSpirit version, the data type `IndexAccessor` includes a new implementation of the method `.isEmpty()` (in Bean syntax: `.isEmpty`). This method may be used to check whether or not the FS_INDEX input component contains entries.

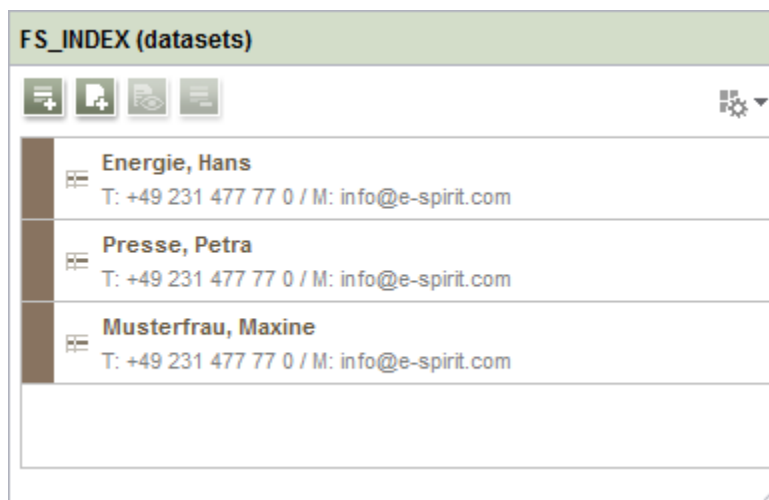

- If the input component contains at least one entry, the method returns `false`.
- If the input component does not contain any entries, the method returns `true`.

Example:

```
$CMS_VALUE(fs_index.isEmpty)$
```

Previously, this method always returned `false`.




For further information, see *Template development / Template syntax / Data types / IndexAccessor* (→*FirstSpirit Online Documentation*).

42.7 FS_INDEX: Manually Sorting Datasets 5.2R17

FS_INDEX allows creation of lists of data which are provided by modules. FirstSpirit contains one solution which supports selection of datasets from data sources of a project (“DatasetDataAccess-Plugin”).

Until now, the input component FS_INDEX, used in conjunction with “DatasetDataAccessPlugin”, already supported sorting datasets via drag-and-drop. This manual sort order was not stored in every case, however, and thus did not always affect the sort order when datasets were output. For FS_INDEX components which are mapped to a to-N foreign key relationship, the current version of FirstSpirit now supports editors' manual sorting of datasets, affecting both the display order in the input component as well as the output order.

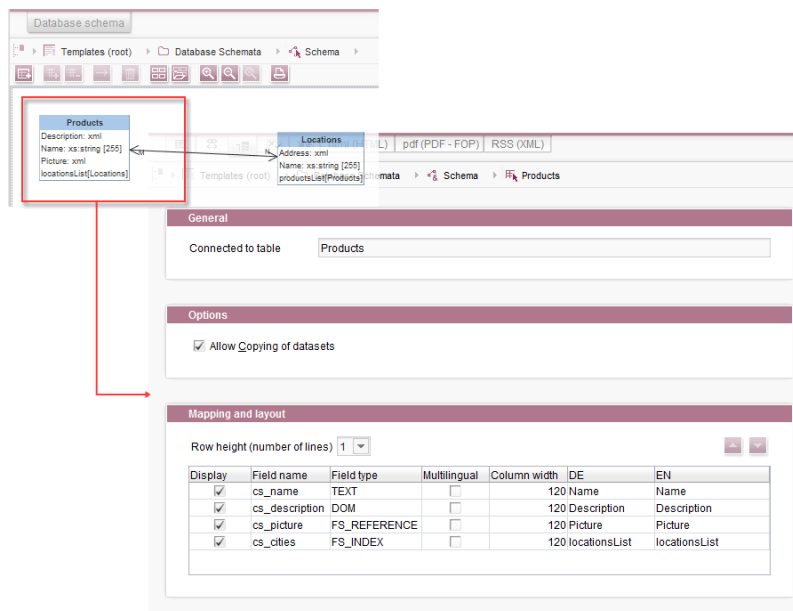


Database schema and table template

On a technical level, a new system column has been introduced:

```
FS_META_DATA
```



(may be shown in the database schema by deactivating “Customize layout / Hide system columns”)

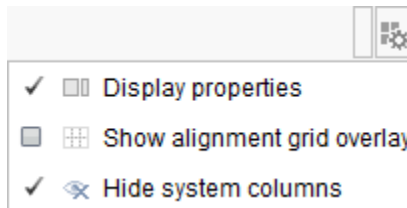

Information about the sort order of the component's entries will be stored in this column.

In **newly created** database schemata or tables, this column is automatically created such that the new sorting functionality can be used right away.

In **already existent** database schemata, this column will be created in tables as soon as the respective schema is updated, i.e. the schema is modified and saved. Alternatively, the context menu item “Edit externally” may be used on the respective schema; either closing the dialog “Externally edited elements” via “Apply changes and close” or a sequence of clicking “Apply changes” and closing the dialog will cause the column to be created in the schema. During a project import into a FirstSpirit server, the column will automatically be added if necessary.

! If a database schema which contains this new column is to be used in other projects (e.g. via FirstSpirit Content Transport), the database schema in the target project must be updated **before** conducting a transport of data from the source project into the target project, so that the sort order of datasets will be correctly retained in the target project.

Note: Output via the system object *#row* (e.g. in a content projection - see *FirstSpirit Online Documentation*, “Templates (basics) / Composition of templates / Database schemata / Dataset output”, section “via content projection”) does not regard the sort order.

Note: A migration from FS_LIST, type *DATABASE* to FS_INDEX may be realized programmatically by a template developer. The following script shows a procedural example. Prerequisite: The schema must already contain the column *FS_META_DATA*, and the FS_LIST definition must already be switched to FS_INDEX.



```
dataset = context.getElement();
dataset.setLock(true, false);
formData = dataset.getFormData();
form = formData.getForm();
indexComponent = form.findEditor("images");
source = indexComponent.source();
session = source.createSession(context, false);
positions = Collections.synchronizedSortedMap(new TreeMap());
pictures = formData.get(null, "images");
index = pictures.get();
for (record : index.iterator()) {
    data = session.getData(record.getIdentifier());
    formData = data.getFormData();
    position = formData.get(null, "position").get();
    positions.put(position, record);
}
sorted = positions.entrySet().stream().sorted(Map.Entry.comparingByKey());
index.clear();
for (el : sorted.iterator()) {
    index.add(el.getValue());
}
pictures.set(index);
dataset.setFormData(formData);
dataset.save("Re-sort", false);
dataset.setLock(false, false);
```

where

- *images* is the unique identifier of the FS_INDEX input component which should be migrated (and which is used to select datasets from the target table),
- *position* is the name of the column in which the sort order of datasets was stored (FS_LIST, tag *PERSISTENCEINDEX*).

For further information, see


- *FirstSpirit Online Documentation*, “Template development / Forms / Input components / INDEX”,
- *FirstSpirit Online Documentation*, “Templates (basics) / Composition of templates / Database schemata”,



- *Documentation for FirstSpirit SiteArchitect*, “Input forms / Index”,
- *FirstSpirit Manual for Editors (ContentCreator)*, “Editing a preview page / Input elements / Index”

42.8 FS_LIST, FS_INDEX, FS_CATALOG: Optimization of Multi-Language Display 5.2R19

The input components FS_LIST, FS_INDEX, and FS_CATALOG may be used to create lists of entries which are based on section or link templates or contain datasets. In these (“outer”) components, the contents of inner components are used as labels to display the inner components. For FS_CATALOG and FS_INDEX, the definition in the tab “Snippet” of the associated templates is used; for FS_LIST, the value of the inner input component or the configuration via the tag *LABELS / LABEL* is used. Example FS_CATALOG:

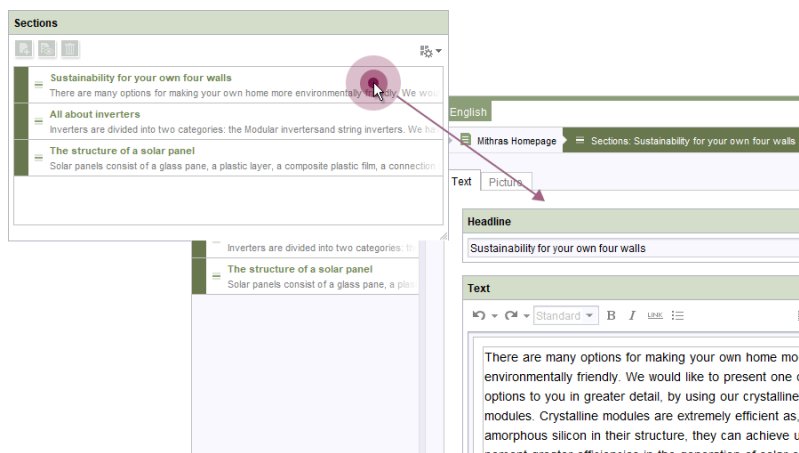

- **outside:** label “Sections”
- **inside:** label “Sustainability for your own four walls | There are many options...” etc.

In projects with multiple project languages (also known as “content languages”), depending on the input component's configuration, the contents may be language-dependent (= different content/values in different languages, `useLanguages=“yes”`).

As of the current version of FirstSpirit, labels of inner components will always be displayed in the language that is chosen via the language tab, independently of the setting in the menu “View / Preferred



display language”. Thus, in a language tab *EN*, contents will always be displayed in the language *EN*. Previously, the display language (e.g. *DE*) was used in some cases.

42.9 Methods ".convert" and ".convert2" in FS_LIST 5.2R4

With FirstSpirit version 5.1 the attribute `convertEntities` of a form field may not have been respected inside a `FS_LIST` component. This could have been corrected using the functions `.convert` or `.convert2` in the corresponding template.

With FirstSpirit version 5.2 the behaviour in `FS_LIST` has been corrected, so that the usage of `.convert` and `.convert2` than led to a duplicate conversion in these cases.

With FirstSpirit v5.2R4 this duplicate conversion will now be suppressed. These cases are logged in the generation log:


```
supressing duplicate conversion of field 'st_test'
```

43 Media

43.1 Optimized identification of file format of media uploaded via drag-and-drop 5.2R4

Upload of media into the Media store can be limited to certain file formats via the option “Restrict allowed media types” in project settings (“FirstSpirit ServerManager / Project settings / Media constraints”).



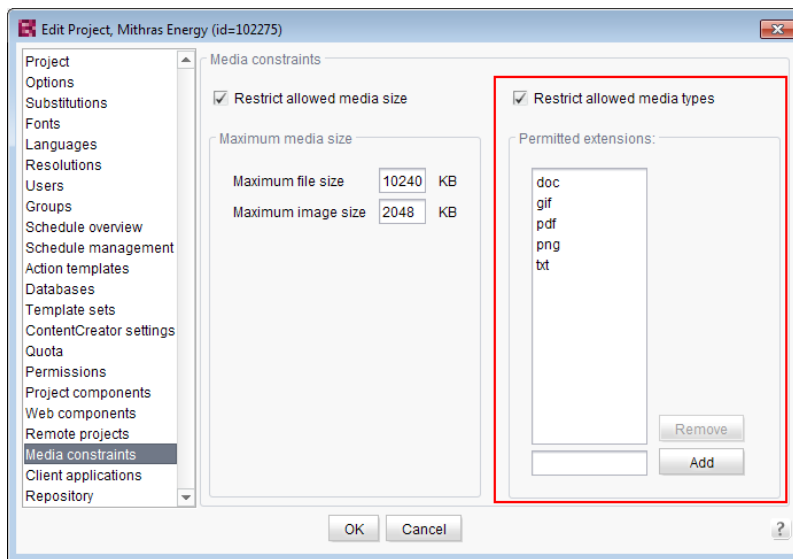

File format identification is done by both inspecting the file name extension and analyzing the file contents. This identification check has been optimized in FirstSpirit version 5.2R4.

Furthermore, when uploading media files into a project via drag-and-drop, a more differentiated error message will be shown if a file cannot be uploaded due to its file type, indicating whether the file type is not supported or not allowed.

For further information about this option, see

- *FirstSpirit Manual for Administrators*, chapter “Restrict allowed media types”

43.2 Recognition of file types when uploading media using drag-and-drop improved 5.2.515, 5.2R6

Media from the workstation's local file system can be dragged directly into the Media Store of the FirstSpirit project by means of drag-and-drop. The file type is recognized automatically by FirstSpirit. Starting with the current FirstSpirit version this applies also for the following Mime types now:

- `.ascx` (file type in FirstSpirit: “text/plain”)
- `.jar` (file type in FirstSpirit: “application/zip”)
- `.xsd` (file type in FirstSpirit: “text/xml”)



43.3 Support for files with more than one dot character in their names

5.2R5

FirstSpirit now supports upload, saving and deployment of media which contain more than one dot in their file names.

This enables upload of files of type “.tar.gz”, for example. In the example “filename.tar.gz”, the part “gz” will be considered the file name extension, while “filename.tar” will be considered the file name of the medium. This also affects the search settings in SiteArchitect (limiting search results via facets): in search results filtered for file name extension, a file of type “.tar.gz” will be displayed associated with the file name extension “gz” (not “tar.gz”). This must also be considered when defining “Permitted extensions” on the “Media constraints” page of project settings in FirstSpirit ServerManager.

This new functionality is supported in ContentCreator and in SiteArchitect when uploading or creating files via media management functionality as well as via the input component FS_REFERENCE. Besides files of type “.tar.gz”, use cases include files which carry version information in their names such as “Linux_4.6.4-1.debian.tar.xz”.

44 Module Development, Scripts, API

44.1 Getting the host name per API (interface "ServerInformationAgent")

5.2R10

The interface `ServerInformationAgent` (package `de.espirit.firstspirit.agency`) provides information on the FirstSpirit server.

With the new FirstSpirit version the method `getServerName()` was added to the interface. This method returns the FirstSpirit server's name. The return value is the symbolic hostname (parameter `SYMBOLIC_HOSTNAME` in `fs-server.conf`). If this parameter is not set the hostname is returned.

44.2 "WE_API" has new events 5.2R20

With the current FirstSpirit version you can, using the “WE_API”, register for events that are fired when creating a new page, or when changing the navigation within the current session. This allows for web-apps editing a FirstSpirit project via FirstSpirit Third Party Preview (TPP) to jump to the newly created page, or to update their navigation.



The new listener can be registered like this, on the JavaScript console:

```
top.WE_API.Common.addNavigationChangeListener(function(fsid) {  
  console.log("navigationChanged: " + (fsid ? fsid.getStoreType() + ":" + fsid.getId() :  
    "all"));  
});
```

Furthermore, using the WE_API, you can now register for events that are fired when a workflow is being processed. This was also added to extend the Third Party Preview (TPP). But the listener can be used independently as well.

The listener can be registered as follows:

```
top.WE_API.Common.addWorkflowTransitionListener(function(){  
  console.log("WorkflowTransition:\n"  
  + "getWorkflowTarget: " + (workflowInfo.getWorkflowTarget() ?  
    workflowInfo.getWorkflowTarget().getId() : "-") + "\n"  
  + "isDeleted: " + workflowInfo.isDeleted() + "\n"  
  + "isReleased: " + workflowInfo.isReleased() + "\n"  
  + "isFirstTransition: " + workflowInfo.isFirstTransition() + "\n"  
  + "getTransitionId: " + workflowInfo.getTransitionId() + "\n"  
  + "getWorkflowId: " + workflowInfo.getWorkflowId() + "\n"  
  + "isEndState: " + workflowInfo.isEndState() + "\n");  
})
```

44.3 API Extension: RenderingAgent - Generating FirstSpirit content via API 5.2R15

FirstSpirit content may be generated via the interface `RenderingAgent` (package: `de.espirit-it.firstspirit.agency`, FirstSpirit Developer API). This allows for control of individualized generation of specific dynamic content directly via the API.

Example:




```
import de.espirit.firstspirit.agency.RenderingAgent;
import de.espirit.firstspirit.access.store.IDProvider
IDProvider node = ..;
String content = context.requireSpecialist(RenderingAgent.TYPE).createRenderer(node)
    .templateSet("html")
    .language("EN_US")
    .preview()
    .render();
```

The example returns the generated content for the node passed to the specialist object.

Supported FirstSpirit object types:

- Page
- Section
- PageRef
- Dataset (including subclasses)
- parsed media

44.4 Changed Behavior for Data Stream Builder Implementations With Aspect “Filterable” 5.2R2

The interface `DataStreamBuilder` in the package `de.espirit.firstspirit.client.plugin.dataaccess` (FirstSpirit Developer API) allows configuration of a set of data which may be used in `FS_INDEX` or made available via reports. Using the aspect `Filterable`, developers may define a list of parameters which will be shown in the user interfaces of `FS_INDEX` element selection dialogs and reports so that users may specify filters in order to limit the data returned by the data stream. If the “Filterable” aspect of a Data Access Plug-In defines more than one parameter with the same name, only the first provided parameter with that name will be used.

For more information about the `DataStreamBuilder` interface, see *FirstSpirit Online Documentation*, Chapter “Plug-In Development / Universal Extensions / Data Access / Data Stream / Builder”.



44.5 Changes to GOM implementation class "GomButton" 5.2R14

In the GOM implementation class `GomButton`, the type of the attributes `onClick` and `onDrop` has been changed from `String` to `GomButtonScriptReference`. Programmatic uses of this class may require modifications to their source code in order to observe this type change.

44.6 ContentCreator: Detection of the user interface language ("Locale") selected by the current user 5.2.611, 5.2R7

FirstSpirit supports a multi-language concept that pervades all aspects of FirstSpirit. This concept differentiates between:

- **User interface language (also called "Locale"):** This language is selected via the combobox on the FirstSpirit Start Page. It specifies the language commonly used in the user interface, such as that of menu labels, dialog texts and content that is not maintained in a language-dependent fashion by editors and template developers in a project. Currently, FirstSpirit supports the user interface languages German, English, French, Spanish, Russian, Italian, and Dutch.
- **Project language:** Project developers specify in which languages editorial content may be entered (via "input components"). As a rule, this content will then be output on a web page in the various language variants of a page. A language selection control may be used to switch to another language of the web page. The project language may differ from the selected user interface language: FirstSpirit does not provide Portuguese as a user interface language, but Portuguese-language content can of course be maintained within FirstSpirit.
- **Editorial language:** An editorial language (also called "display language") may be used by project developers to influence the display of input elements and other objects in ContentCreator. Such editorial languages are used for labels of input components, tool tips, and elements of a selection list ("combobox"), among others.

As of the current FirstSpirit version, it is possible to detect the user interface language of ContentCreator, selected by the current user, via the method `getLocale()` of the FirstSpirit Developer API interfaces

- `WebeditUiAgent` (package `de.espirit.firstspirit.webedit`):
`de.espirit.firstspirit.webedit.WebeditUiAgent.getLocale()`




- Common (package de.espirit.firstspirit.webedit.client.api):
WE_API.Common.getLocale()

For further information, see *Template development / JavaScript APIs / ContentCreator / Common Functionality* (→*FirstSpirit Online Documentation*).

44.7 ContentCreator: Displaying page-related status information prominently 5.2.518, 5.2R6

At the left end of the ContentCreator toolbar, the page status display provides information about the status of the page currently shown in the preview and allows users to perform actions based on that status. For better organization, these actions are only made available in a flyout that is shown once the user hovers the mouse pointer over the page status display.

Page-related status information that is especially important for the editorial process may now be added via a new plugin type using the FirstSpirit API. This information will be displayed prominently in the ContentCreator user interface:

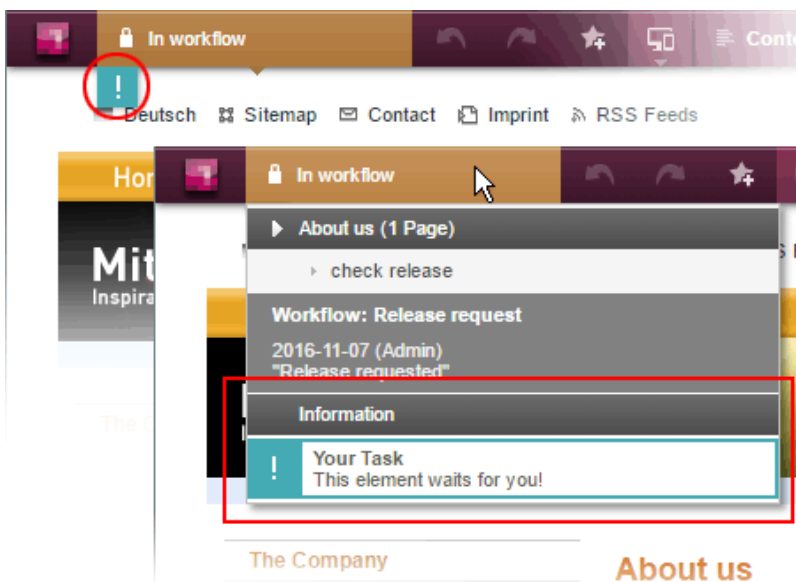

In this example, an entry is added to the status menu if the current page is in a workflow. Additionally, a prominent “!” icon will be displayed underneath the page status display if the user has been explicitly set as an editor in the workflow. This example is implemented in the “ContentCreator Examples”, available as a source code package in *FirstSpirit Online Documentation*, chapter “Plug-In Development / Examples”.



The basis for this plugin is the interface `WebeditStatusNotePlugin` (FirstSpirit Developer API, package `de.espirit.firstspirit.webedit.plugin.status`). Based on information about the currently shown page, given by a `WebeditStatusNoteContext` object, the status note plugin delivers a list of `WebeditStatusNote` objects.

`WebeditStatusNote` objects can be created via a `WebeditStatusNoteBuilder` object that may be obtained by calling `WebeditStatusNoteContext#createNote`.

Using such a `WebeditStatusNoteBuilder` object, the following attributes of a `WebeditStatusNote` may be configured before creating the note object (example data is based on the above illustration):

- title (e.g. "Your Task")
- text (e.g. "This element waits for you!")
- icon (e.g. an exclamation mark)
- color (e.g. teal)
- related actions

In order to ensure a consistent design, the color must be chosen from a color palette given in the Enum `WebeditColor` (package `de.espirit.firstspirit.webedit`).

For further information, see *FirstSpirit Manual for Editors (ContentCreator)*, chapter "Menu functions / Page status", and *Plug-In Development / ContentCreator Extensions / Interactive Features / Page-Based Notifications* (→*FirstSpirit Online Documentation*).

44.8 ContentCreator: Extended configuration possibilities for information displays (WE_API) 5.2R15

FirstSpirit provides a JavaScript API (`WE_API`) which allows interaction with the user interface of ContentCreator. This API has been extended for information displays:

- Common (package `de.espirit.firstspirit.webedit.client.api`):
`WE_API.Common.showMessage(String title, String text)`



Already available: `void showMessage(String text)` displays a simple message box with an “OK” button which supports configuration of only the message box text. The message box will always be shown as an information message. The button configuration cannot be changed.

Newly available: the function `void showMessage(String title, String text)` supports configuration of the message box title in addition to configuration of the message box text.

Example:

```
<script type="text/javascript">
    top.WE_API.Common.showMessage("Important message:", "I am a sample message box.");
</script>
```

44.9 ContentCreator: Modify view of the dialog "Manage media" (de.espirit.firstspirit.webedit.plugin.media) 5.2R7

By using the package `de.espirit.firstspirit.webedit.plugin.media` (FirstSpirit Developer API) it is possible to implement project-specific extensions for the dialog “Manage media” in the ContentCreator.

The new methods in the interface `MediaManagementContext`


- `refresh()` it is possible to refresh the view of the dialog (e.g. when a new medium has been added)
- `show(MediaFolder folder)` it is possible to display a specific folder.

44.10 ContentCreator: Opening the "Edit image section" dialog via API

5.2R5

Image sections (crops) of media elements of type “Picture” may be edited in ContentCreator using a specialized dialog:



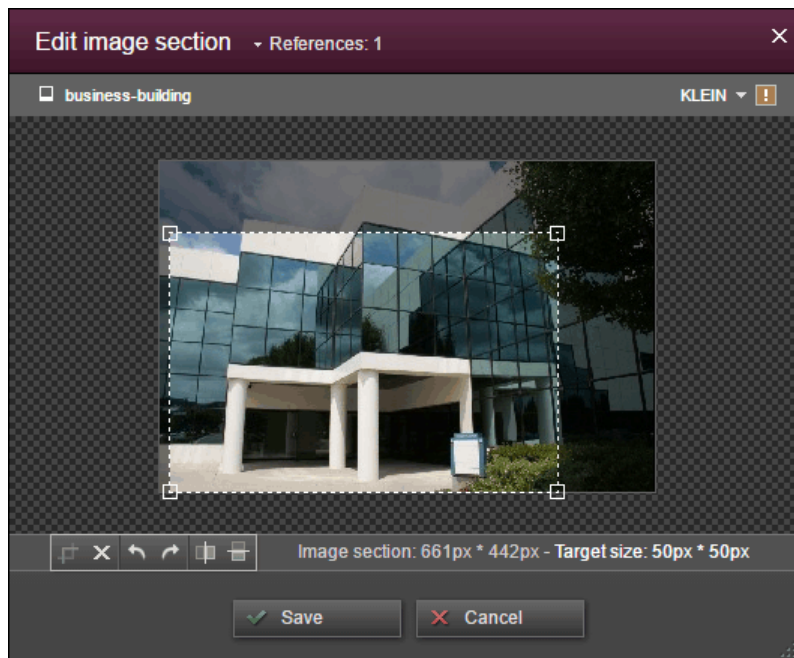

As of the current FirstSpirit version, this dialog may now be opened via the FirstSpirit Developer API:

```
de.espirit.firstspirit.webedit.server.CropDialogOperation
```

The parameter `media` passed to the method `setMedia(Media media)` specifies the media element which should be edited.

The parameter `resolutions` passed to the method `setResolutions(List<Resolution> resolutions)` contains resolutions of the image which should be available for editing in the dialog. If this list contains no resolutions or only resolutions which are unknown within the current project, all resolutions specified in the project, with the exception of the resolution “ORIGINAL”, will be made editable. If the list contains several other resolutions along with “ORIGINAL”, the resolution “ORIGINAL” will be ignored and not made available for editing.

The following example script (“cc_crop”) opens the image section dialog if an image is dropped onto an accordingly configured FS_BUTTON input component in the preview.



```
import de.espirit.firstspirit.agency.LanguageAgent;
import de.espirit.firstspirit.agency.OperationAgent;
import de.espirit.firstspirit.agency.ResolutionAgent;
import de.espirit.firstspirit.agency.TransferAgent;
import de.espirit.firstspirit.access.store.IDProvider;
import de.espirit.firstspirit.access.store.mediastore.Media;
import de.espirit.firstspirit.webedit.server.CropDialogOperation;
if (dropdata == null) {
    return false;
}
transferAgent = context.requireSpecialist(TransferAgent.TYPE);
elements = dropdata.get(transferAgent.getType(IDProvider.class));
if (elements == null || elements.isEmpty()) {
    return false;
}
media = elements.get(0);
if (media == null || !(media instanceof Media) ) {
    return false;
}
languageAgent = context.requireSpecialist(LanguageAgent.TYPE);
lang = null;
for (language : languageAgent.getLanguages().iterator()) {
    if ("EN".equals(language.getAbbreviation())) {
        lang = language;
    }
}
resolutionAgent = context.requireSpecialist(ResolutionAgent.TYPE);
resolutions = new ArrayList();
resolutions.add(resolutionAgent.getResolutionByName("Teaser"));
resolutions.add(resolutionAgent.getResolutionByName("HeaderPicture"));
operations = context.requireSpecialist(OperationAgent.TYPE);
operation = operations.getOperation(CropDialogOperation.TYPE);
operation.setMedia(media);
if (lang != null && media.isLanguageDependent()) {
    operation.setLanguage(lang);
}
operation.setResolutions(resolutions);
operation.perform();
```

Example configuration of the FS_BUTTON input component:



```
<FS_BUTTON
  name="pt_cropButton"
  hidden="yes"
  onDrop="script:cc_crop"
  style="firstspirit"
  useLanguages="no">
  <DROPTYPES>
    <TYPE value="picture"/>
  </DROPTYPES>
  <LANGINFOS>
    <LANGINFO lang="" label="Crop a Picture"/>
  </LANGINFOS>
</FS_BUTTON>
```

Example for HTML output:

```
<span${CMS_VALUE(fsbutton(editorName:"pt_cropButton"))}></span>
```

If a media element that is of type `File` or is an object of type `Picture` which does not contain image data is passed to the method `setMedia(Media media)`, according exceptions will be logged to the file `fs-server.log`, and the image section dialog will not be opened.

For further information about image section editing in ContentCreator, see *FirstSpirit Manual for Editors (ContentCreator)*, chapter “Editing a preview page / Media”, section “Edit image sections”.

44.11 ContentCreator: Use of "setTitle" for a dialog's main title 5.2.611, 5.2R7

The interface `ShowFormDialogOperation` (package `de.espirit.firstspirit.ui.operations`, FirstSpirit Developer API) allows creation and configuration of project-specific dialogs for both `SiteArchitect` and `ContentCreator`.

In `ContentCreator`, the title text that may be set for such a dialog via the method `setTitle(String title)` is now also used for the dialog's main title (berry-colored background), e.g.



Edit Project Settings

☰ Edit Project Settings > Global link (internal)

Target: [BGU] Mithras Energy (Enter search term)

No element has been selected

Link text:

Previously, the title text was only used in the dialog's secondary labeling (grey background), and the main title text could not be influenced:

Edit contents

☰ Edit Project Settings > Global link (internal)

Target: Mithras Energy (Enter search term)

No element has been selected

Link text:

44.12 ContentCreator: Using dropdown menus via API 5.2R5

The newly-added interface `SelectOptionOperation` (FirstSpirit Developer API, package `de.espirit.firstspirit.webedit.server`) allows developers to use a lightweight dropdown menu for selection of a value within the ContentCreator preview, e.g.





In this example, the dropdown menu appears upon clicking an FS_BUTTON input component rendered in the preview (“Select an option”) and configured as follows:

```
<FS_BUTTON
  name="pt_selectOption"
  hidden="yes"
  onClick="script:cc_select_operation"
  style="firstspirit"
  useLanguages="no">
  <LANGINFOS>
    <LANGINFO lang="" label="Select an option"/>
    <LANGINFO lang="DE" label="Wählen Sie eine Option"/>
  </LANGINFOS>
</FS_BUTTON>
```

The dropdown menu allows selection among options 1 through 5. These options can be added to the dropdown using the method `SelectOptionOperation#addOption(String label, String value)`. Every single call to this method can add one item to the dropdown menu, where `String label` is the human-readable label shown in the menu and `String value` represents the internal value.

Example script (“cc_select_operation”):



```

import de.espirit.firstspirit.webedit.server.SelectOptionOperation;
import de.espirit.firstspirit.agency.OperationAgent;
import de.espirit.firstspirit.ui.operations.RequestOperation;
operations = context.requireSpecialist(OperationAgent.TYPE);
operation = operations.getOperation(SelectOptionOperation.TYPE);
operation.addOption("Option 1", "1");
operation.addOption("Option 2", "2");
operation.addOption("Option 3", "3");
operation.addOption("Option 4", "4");
operation.addOption("Option 5", "5");
selection = operation.perform();
if (selection != null) {
    request = operations.getOperation(RequestOperation.TYPE);
    request.perform("Your selection: " + selection);
}

```

Once the user selects an item in the dropdown list, this selection is then output in a dialog.

The FS_BUTTON can be rendered in the preview using the function `fsbutton(...)`:


```
<span$CMS_VALUE(fsbutton(editorName:"pt_selectOption"))$></span>
```

See also *Plug-In Development / ContentCreator Extensions / Interactive Features / Selection Lists* (→*FirstSpirit Online Documentation*).

44.13 Creating maintenance mode schedule tasks via API 5.2.518, 5.2R6

FirstSpirit offers maintenance mode functionality which allows shutting down the server in an orderly fashion at a predetermined time in order to perform upgrades, repairs, or other maintenance tasks. Depending on the configuration, before and/or during the maintenance period, users will not be allowed to log on to the server or to selected projects, users currently logged in will be notified that the server will be shut down, etc. Until now, this functionality could only be set using the GUI (ServerManager / Server / Properties / Schedule management / Action “Maintenance mode”):



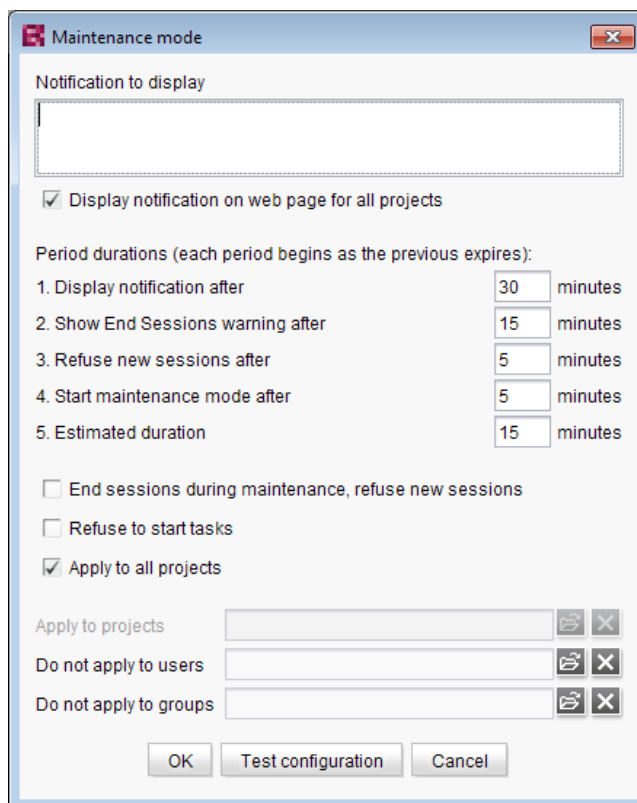

Configuration of a maintenance mode action

As of the current FirstSpirit version, maintenance mode schedule entry actions can now be created via API. The new interface `MaintenanceModeTask` (FirstSpirit Developer API, package `de.espirit.firstspirit.access.schedule`) allows creation and configuration of such a schedule entry action analogous to configuration via the GUI.

Moreover, you can use the new interface `MaintenanceModeInfo` to query via API if a maintenance mode schedule is already running on the server. The new interface `MaintenanceModeAgent` has been created for terminating running maintenance mode schedules. Server administrator permission is required for this. In return, the method `stopMaintenance(long)` (FirstSpirit Access API, package `de.espirit.firstspirit.access`, interface `AdminService`) has been discontinued (“Deprecation”) and can be omitted in a following FirstSpirit major version.

For further information about the maintenance mode schedule entry action, see *FirstSpirit Manual for Administrators*, chapter “FirstSpirit ServerManager / Schedule entry planning / Server-based actions / Maintenance mode”.



44.14 Deleting Elements 5.2R18

The new interface `DeleteOperation` in the package `de.espirit.firstspirit.store.operations` (FirstSpirit Developer API) may be used to carry out server-side deletion of FirstSpirit elements.

In the course of this work, the following methods of the class `AccessUtil` (package `de.espirit.firstspirit.access`, FirstSpirit Access API) have been deprecated and can be omitted in subsequent versions:

```
AccessUtil#delete(IDProvider, boolean)
AccessUtil#delete(Collection, boolean)
```

In contrast to `AccessUtil`, the new interface also supports deletion of datasets.

Example script for the deletion of a single element:

```
import de.espirit.firstspirit.agency.OperationAgent;
import de.espirit.firstspirit.store.operations.DeleteOperation;
storeElement = context.getElement();
operationAgent = context.requireSpecialist(OperationAgent.TYPE);
deleteOperation = operationAgent.getOperation(DeleteOperation.TYPE);
deleteResult = deleteOperation.perform(storeElement);
```

44.15 Discontinuation ("Deprecation") of methods for the "Content2" interface 5.2R2

The following methods in the `Content2` (FirstSpirit Access API, `de.espirit.firstspirit.access.store.contentstore` package) have been discontinued in FirstSpirit version 5.2R2 ("Deprecation") and can be omitted in the next FirstSpirit major version (6.0).

- `delete(Entity entity)`
[Replacement: `StoreElement.delete()`
Package `de.espirit.firstspirit.access.store`, Interface `StoreElement`]
- `isLocked(Entity entity)`
[Replacement: `StoreElement.isLocked()`
Package `de.espirit.firstspirit.access.store`, Interface `StoreElement`]



- `isLockedOnServer(Entity entity, boolean allSessions)`
[Replacement: `StoreElement.isLockedOnServer(boolean)`
Package `de.espirit.firstspirit.access.store`, Interface `StoreElement`]
- `lock(Entity entity)`
[Replacement: `Dataset#setLock(true)`
Package `de.espirit.firstspirit.access.store`, Interface `StoreElement`]
- `release(Entity entity)`
[Replacement: `IDProvider.release()`
Package `de.espirit.firstspirit.access.store`, Interface `IDProvider`]
- `release(Entity entity, String comment)`
[Replacement: `IDProvider.release()`
Package `de.espirit.firstspirit.access.store`, Interface `IDProvider`]
- `unlock(Entity entity)`
[Replacement: `Dataset#setLock(false)`
Package `de.espirit.firstspirit.access.store`, Interface `StoreElement`]

Methods set to the “deprecated” state can still be used, but as they will be omitted in subsequent versions, this is not advisable. If methods, classes, and interfaces that are no longer supported or are set to deprecated are used in scripts and/or modules, entries are written to log files accordingly (e.g., server log, generation log, etc.). The corresponding log entries should be checked and the cause(s) remedied.

For more information and replacement options, see *FirstSpirit Access API*.

44.16 E-mail addresses with special characters in the domain part 5.2R6

During work with FirstSpirit, e-mail addresses may be entered in several contexts, e.g. in order to send FirstSpirit users notifications related to tasks, workflows, etc. As of the current FirstSpirit version, e-mail addresses with special characters in the domain part (“IDN domains”, RFC 3490) may be used, e.g. “info@müller.de”.

Related to this change, several modifications were made to the FirstSpirit Access API: The *public* fields as well as the constructor of the class `de.espirit.firstspirit.access.MailHeader` have been




marked deprecated. As a replacement, `MailHeader#getBuilder()` provides a builder object that carries out the necessary conversions automatically.

Methods set to the “deprecated” state can still be used, but as they will be omitted in subsequent versions, this is not advisable. If methods, classes, and interfaces that are no longer supported or are set to deprecated are used in scripts and/or modules, entries are written to log files accordingly (e.g., server log, generation log, etc.). The corresponding log entries should be checked and the cause(s) remedied.

44.17 Establishing connections via API in schedule task scripts 5.2.515, 5.2R6

Scripts are an important means to easily and quickly implement custom functionality that is not included in FirstSpirit's standard functionality set. Scripts may be used in various contexts in FirstSpirit, e.g. in schedule tasks (“FirstSpirit ServerManager / Server or Project properties / Schedule management”, action “Execute script”). If a script should perform modifying operations on a project, a separate connection to the server must be used instead of the current session. For this, login information (user name, password) of the user that should be used for authentication against the server must be entered.

Until now, this configuration could only be done via GUI:

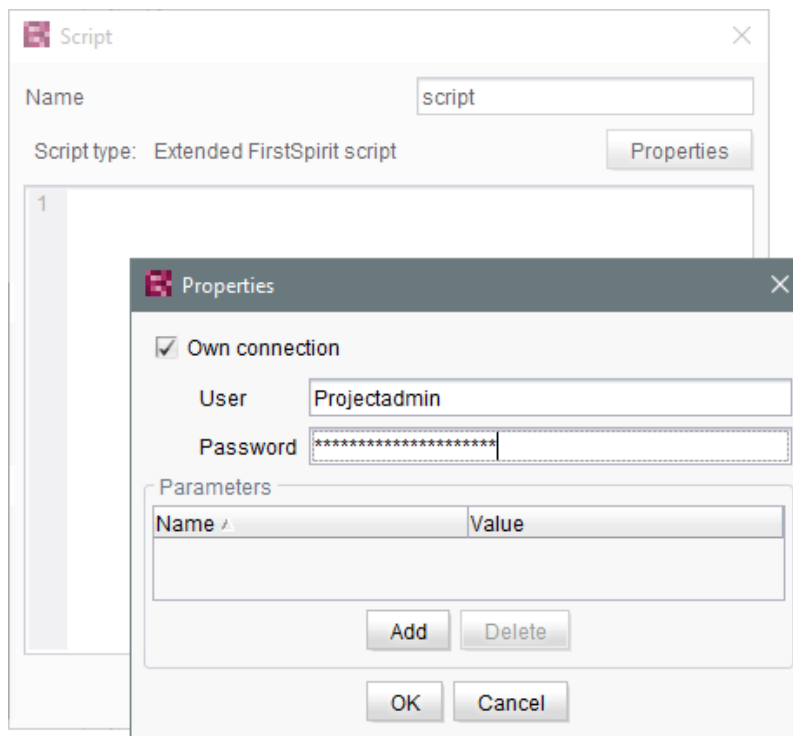

As of the current FirstSpirit version, such a separate connection can also be established via API (interface `ScriptTask`, package `de.espirit.firstspirit.access.schedule`, FirstSpirit Access API). For this, the interface was extended with the following methods:

- `getUseCustomConnection()`
- `setUseCustomConnection(String login, String password)`
- `getCustomConnectionLogin()`
- `setUseSystemConnection()`

For further information about schedule tasks, see *FirstSpirit Manual for Administrators*, chapter “Execute script”.

44.18 Examples for integration of external data sources using generic DataAccessPlugins 5.2R5

As of FirstSpirit version 5.2R5, source code packages are available that contain example modules for integration of external data sources in FirstSpirit using generic `DataAccessPlugins`. These modules allow integration of web services that use Open Data Protocol (OData) and Simple Object Access Protocol (SOAP), respectively, as data sources for `FS_INDEX` input components, i.e. such data sources become usable without creating own Java implementations.

Manuals for compilation, installation, configuration, and use of the modules are available in *FirstSpirit Online Documentation*, chapter “Plug-In Development / Examples / Modules: Accessing Web Services via OData/SOAP”.

44.19 Expansion of functions for communication between client-side Single Page Application (SPA) and ContentCreator (TPP) 5.2R16

The `editorId()` function has been expanded to include the `details` parameter.

With the new `details` parameter, it is possible to overwrite the otherwise context-sensitive response of the `editorId()` function. As a result, you define for the client (SiteArchitect or ContentCreator) for which the `previewId` should be rendered.

Possible values for the `details` parameter are



- **JAVACLIENT:** The additional information for the SiteArchitect are always generated.
- **WEBEDIT:** The additional information for the ContentCreator are always generated.
- **SIMPLE:** Only information that is not dependent on the editors in FirstSpirit is written to the `editorId`. These data can be used to address the corresponding element in an external element.

A new function `previewId()` similar to the `editorId()` function has been introduced.

This function is a wrapper that can be used internally to call up the `editorId()` function with certain parameters that cannot be changed.

The function `previewId()` has just one optional parameter: `element`. This parameter can be used to transfer a FirstSpirit object or content area. Other parameters may not be used.

Agent for analyzing the return value

To analyze the return value from `previewId()` an agent has been implemented as part of the API (FirstSpirit Developer API). This agent can be used to determine the ID for the FirstSpirit element to be edited in a certain project language:

```
de.espirit.firstspirit.agency.PreviewIdAgent  
de.espirit.firstspirit.agency.PreviewIdAgentImpl
```

! The previous behavior of `editorId()` has not been changed. No changes to existing projects are needed.

For more information

- about the `editorId` function, see *FirstSpirit Online Documentation*, under “Template development / Template syntax / Functions / In instructions / editorId”
- about FirstSpirit Third Party Preview, see documentation for “FirstSpirit Content as a Service”.



44.20 Extended functionality for FS_BUTTON scripts 5.2R18

An error has been fixed which could lead to incorrect evaluation of group and user information in Content-Creator forms which were opened using the interface `ShowFormDialogOperation` (package `de.espirit.firstspirit.ui.operations`, FirstSpirit Developer API).

In the course of this bugfix, the context object available to scripts which are called in SiteArchitect via the input component FS_BUTTON has been changed to the type `de.espirit.firstspirit.access.ClientScriptContext` (previously, the context object was of type `de.espirit.firstspirit.access.BaseContext`). In contrast to the old context type, this new type offers extended functionality.

For further information, see *FirstSpirit Online Documentation*, page [FS_BUTTON](#), parameters `onClick` and `onDrop`, variable `context`.

44.21 Extension of the interface "RenderingAgent" 5.2R18

The interface `RenderingAgent` (package `de.espirit.firstspirit.agency`, FirstSpirit Developer API) now also supports passing of FirstSpirit templates and thus the opportunity to render output channel source code as desired.

Until the current version of FirstSpirit, "RenderingAgent" already supported the following FirstSpirit object types (including subclasses):

- Page
- Section
- PageRef
- Dataset
- parsed Media

New as of the current version of FirstSpirit, `RenderingAgent` additionally supports passing of dynamic output channel source code (`java.lang.String`) and of FirstSpirit templates, e.g.:

- Page templates



- Link templates
- Render templates

Here, it is necessary that a page reference or a media element is passed via `linkRoot()`. The calculations of relative links are done within the context of this node.

Example 1:

```
import de.espirit.firstspirit.agency.StoreElementAgent;
import de.espirit.firstspirit.agency.RenderingAgent;
import de.espirit.firstspirit.access.store.sitestore.PageRef;
storeElementAgent = context.requireSpecialist(StoreElementAgent.TYPE);
renderingAgent = context.requireSpecialist(RenderingAgent.TYPE);
pageRef = storeElementAgent.loadStoreElement("mithras_home", PageRef.UID_TYPE, false);
return renderingAgent.createRenderer("<a href=\"\$CMS_REF(ss_product_overview)\$\">
    \$CMS_VALUE(linktext)\$</a>").linkRoot(pageRef).additionalContext("linktext",
    "Some text").urlFactory("Advanced URLs").render();
```

Example 2: Possible use case: obtaining the preview URL of a medium

```
PageRef pageRef = ...; // obtain current page ref (link source)
Media targetElement = ...; // obtain target medium (link target)
RenderingAgent renderingAgent = context.requireSpecialist(RenderingAgent.TYPE);
RenderingAgent.Renderer renderer = renderingAgent.createRenderer("\$CMS_REF(target)\$");
    // obtain a renderer that is configured with output channel code
String mediaUrl = renderer.linkRoot(pageRef)
    .additionalContext("target", targetElement)
    .preview()
    .render();
```

In this example, output channel code to generate the URL of a medium is passed to `RenderingAgent.createRenderer(String)`, which returns an object of type `RenderingAgent.Renderer`. This `Renderer` object is then used to specify the parameters of generation, e.g. to create the association between the `CMS_REF` parameter `target` and the store element `targetElement` via the method `additionalContext(String, ?)`. The call to the method `render()` returns the generated result.

Furthermore, with the new methods



```
skipProjectProperties()  
evaluateProjectProperties(boolean)
```

it is possible to specify whether or not project settings (in FirstSpirit SiteArchitect under “Global settings”) should be considered during generation.

44.22 Extension of the interface "ScheduleStorage" 5.2R18

The interface `ScheduleStorage` (package `de.espirit.firstspirit.access.schedule`, FirstSpirit Access API) was extended with the method `createScheduleEntry(String name, Project project)`. This method allows direct creation of project-specific schedule entries. This method may be used with project administrator privileges.

For security reasons, the already existing method `createScheduleEntry(String)`, which may be used to create server-wide schedule entries, can now only be used with server administrator privileges.

To ensure that current uses of `createScheduleEntry(String)` to create project-specific schedule entries continue to work with project administrator privileges, the code must be modified accordingly.

Example “previously”:

```
import de.espirit.firstspirit.access.AdminService;  
// Obtain a ScheduleStorage object from the AdminService.  
scheduleStorage = context.getConnection().getService(AdminService.class)  
    .getScheduleStorage();  
// Create a ScheduleEntry object, name "test123".  
scheduleEntry = scheduleStorage.createScheduleEntry("test123");  
// Associate the ScheduleEntry object with the current project.  
scheduleEntry.setProject(context.getProject());  
// Set ScheduleEntry object to active, save and unlock the object.  
scheduleEntry.setActive(true);  
scheduleEntry.save();  
scheduleEntry.unlock();
```

Example “now”:



```
import de.espirit.firstspirit.access.AdminService;
// Obtain a ScheduleStorage object from the AdminService.
scheduleStorage = context.getConnection().getService(AdminService.class)
    .getScheduleStorage();
// Create a ScheduleEntry object, name "test123", associated with the current project.
scheduleEntry = scheduleStorage.createScheduleEntry("test123", context.getProject());
// Set ScheduleEntry object to active, save and unlock the object.
scheduleEntry.setActive(true);
scheduleEntry.save();
scheduleEntry.unlock();
```

44.23 External Synchronization / Content Transport: Selecting a database layer for import 5.2R5

The functionalities “FirstSpirit Content Transport” and “External Synchronization” allow export of FirstSpirit content from a source project and import of this content into a target project - if desired, on a regular schedule and automated. Among others, a goal of these functionalities is to enable reuse of content independent of projects and servers and to synchronize the content state between different projects. This synchronization can of course include database content as well. During import of a database schema using either of these functionalities, the new interface `LayerMapper` (FirstSpirit Developer API, package `de.espirit.firstspirit.transport`) allows selection of a database layer onto which the schema should be mapped. This enables mapping several schemata onto different layers.

FirstSpirit provides two example implementations:

- `LayerMapper.SchemaUidBasedLayerMapper` maps schema UID to target layer name.
- `LayerMapper.LayerNameBasedLayerMapper` maps source layer name to target layer name. This allows mapping of several schemata onto different layers.

(Not suitable for use with “External Synchronization”).

Custom mappers can be implemented using the API.

The following classes and methods have been marked deprecated in the course of this new implementation:



- “External Synchronization”
 - `ImportOperation.DatabaseLayerMapper`
 - `ImportOperation.MapDatabaseLayerMapper`
 - `IDENTITY_LAYER_MAPPING`
- “Content Transport”:
 - `installFeature(FeatureFile featureFile, Map<String,String> layerMapping)`
(interface `FeatureInstallAgent`, Package `de.espirit.firstspirit.feature`)
has been replaced by: `installFeature(@NotNull FeatureFile featureFile, @Nullable LayerMapper layerMapper)`

Methods set to the “deprecated” state can still be used, but as they will be omitted in subsequent versions, this is not advisable. If methods, classes, and interfaces that are no longer supported or are set to deprecated are used in scripts and/or modules, entries are written to log files accordingly (e.g., server log, generation log, etc.). The corresponding log entries should be checked and the cause(s) remedied.

44.24 General information 5.2R2

It is recommended for all FirstSpirit server updates to newly create all self-produced modules vis-a-vis the new FirstSpirit version, when upgrading to FirstSpirit version 5.2R2, particularly when using the *PreviewParameter* interface (*de.espirit.firstspirit.client.mpp* package). In addition to this, all the installed modules delivered by e-Spirit and all web applications should also always be updated.

44.25 Handling dependent modules 5.2R2


It is possible to define dependencies between FirstSpirit modules. This takes place using the entry

```
<dependencies>
  <depends>modulname</depends>
</dependencies>
```

in the `module.xml` file for the dependent module (“child”).



With FirstSpirit version 5.2R2, both those modules which contain a `<dependencies><depends>` specification (“child”), and those referenced by this specification (“parent”) are uninstalled from the FirstSpirit Server (“Uninstall” button) – even if the dependent module is no longer available on the server. “child” modules whose “Parent” module is no longer on the server are visualized in the FirstSpirit Server-Manager (“Server properties / Modules”) with an appropriate icon:

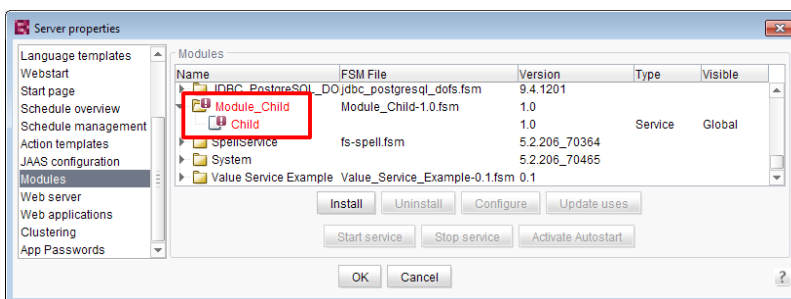

A tool tip lists the names of the missing dependent modules.

It is possible to use the newly implemented `isActive` method (FirstSpirit Developer API, `ModuleAdminAgent` interface) in this context to check whether a module has missing references to other modules.

For more information, see

- *FirstSpirit Developer Manual for components (German only)*, chapters “Modul-Ereignisbehandlung” and “Der Modul-Deskriptor”
- *FirstSpirit Manual for Administrators*, chapter “Module”
- *FirstSpirit Developer API*, `ModuleAdminAgent` interface (`de.espirit.firstspirit.agency` package)

44.26 Identification of server mode (isolated vs. legacy) 5.2.611, 5.2R7

The interface `ServerInformationAgent` (FirstSpirit Access API, package `de.espirit.firstspirit.agency`) provides version information about the FirstSpirit server. The `VersionInfo` object returned by the agent now provides information about the currently active server mode (“Legacy” or “Isolated”). This information may be obtained via the new method `getMode()`:

- LEGACY: The FirstSpirit server is running in legacy mode.



- ISOLATED: The FirstSpirit server is running in isolated mode.

For further information, see *Isolated mode [Beta]* (→*Manual for Module Developers*).

44.27 Improved detection of identical or compatible module resources

5.2R6

The use of identical resources (e.g. a library) in various product components (e.g. FirstSpirit server, additional modules) frequently causes conflicts in practical application. Example: If, for example, FirstSpirit internally uses “SLF4J”, version 1.6.1 for logging within a web application, a conflict arises if a module developer attempts to use another version of “SLF4J” for a customer-specific module implementation. Likewise, such a conflict may arise in global module resources: these are accessible with a server-wide scope and may thus also cause conflicts with other modules. The current FirstSpirit version enables detection of identical or compatible resources used in various product components. This requires several data:

Assignment of unique identifiers for resources: If a library is added to a module as a resource, the component descriptor must contain a unique name for the resource. It is recommended that names are not just unique but follow a set syntax (following the Maven schema) in order to enable identification of identical or compatible resources, e.g.:

```
<web-resources>
  <resource name="org.slf4j:slf4j-api" version="1.6.4">lib/slf4j-api-1.6.4.jar
</resource>
</web-resources>
```

The name (following the Maven schema) begins with a “groupID” (here: `org.slf4j`), followed by an “artifactID” (here: `slf4j-api`), separated by a colon. The “groupID” is a grouping identifier (similar to a Java package name) and serves as a unique identifier of the producer. It usually is the reversed domain name used by the producer. The “artifactID” is the resource's name (see [Maven conventions](#)).

Version information for resources: When resources with identical names are used, FirstSpirit attempts to detect if these resources are compatible with each other. Alongside the unique identifier (“name”), this also requires information about the version of the delivered resource (“version”) and can optionally include information about the minimum compatible version (“minVersion”) and the maximum compatible version (“maxVersion”):




```
<web-resources>
  <resource name="org.slf4j:slf4j-api" version="1.6.4"
    minVersion="1.6.1" maxVersion="1.7.2">
    lib/slf4j-api-1.6.4.jar
  </resource>
</web-resources>
```

For “maxVersion”, the definition `minVersion="1.6.1" maxVersion="1.9.9"` is allowable as long as the library remains stable within a minor version line (even though this version of the library does not yet exist at the time the module is generated).

If several different versions of a library are added to FirstSpirit, this information can be used to identify the best applicable version of the resource.

Rules:

- If several mentions of a resource with the same unique identifier omit version information (“version”), the resources are deemed incompatible with each other.
- If several mentions of a resource with the same unique identifier but different versions (“version”) omit “minVersion” and “maxVersion”, the resources are deemed compatible. The latest version of the resource will be used.
- If several mentions of a resource with the same unique identifier but different versions (“version”) do carry compatibility information (“minVersion” and “maxVersion”), the latest version of the resource which is compatible with all modules will be used.
- ■ If “minVersion” is omitted, the compatibility range does not have a lower boundary (“0” to “maxVersion”).
- ■ If “maxVersion” is omitted, the compatibility range does not have an upper boundary (“minVersion” to infinity).

44.28 Individualizing the global FirstSpirit web applications 5.2R4

FirstSpirit builds on the concept of modular extensibility by customers and partners. This means that the FirstSpirit standard functions can be adjusted relatively easily to the specific requirements of the



projects in question by means of individual, project-specific enhancements (such as input components, services, applications).

Previously, configurable instances of the FirstSpirit web applications that were local to the project had to be created for these individual enhancements. This is still possible.

With FirstSpirit version 5.2R4, however, it is also possible to adapt the global FirstSpirit web applications (fs5root, fs5preview, fs5webedit, etc.) individually, significantly reducing the amount of memory needed, particularly in a corporate environment with many projects. This feature could be released on request in FirstSpirit version 5.2R3 via the e-Spirit Technical Support, with FirstSpirit version 5.2R4 this functionality can be used by default without any need for activation by the e-Spirit Technical Support.

For further information please see *FirstSpirit Manual for Administrators*,

- Chapter “Individualizing the FirstSpirit web applications”
- Chapter “Web applications”

44.29 Individualizing the global FirstSpirit web applications (BETA!) 5.2R3

FirstSpirit builds on the concept of modular extensibility by customers and partners. This means that the FirstSpirit standard functions can be adjusted relatively easily to the specific requirements of the projects in question by means of individual, project-specific enhancements (such as input components, services, applications).

Previously (prior to FirstSpirit version 5.2R3), configurable instances of the FirstSpirit web applications that were local to the project had to be created for these individual enhancements. This is still possible in 5.2R3.

With FirstSpirit version 5.2R3, however, it is also possible to adapt the global FirstSpirit web applications (fs5root, fs5preview, fs5webedit, etc.) individually for the first time, significantly reducing the amount of memory needed, particularly in a corporate environment with many projects.

The following use case should illustrate the advantages of the new strategy:

An individual report (and/or an EasyEdit action, JSP tag lib, executable, etc.) is to be added to the ContentCreator. The necessary classes are defined in a module in a web app component and the module is installed on the FirstSpirit Server.



ContentCreator as local project instance: A ContentCreator instance that is local to the project is then created for each project that is to use the new functionality (report, JSP tags, etc.) and the application is configured with the web app component (from the module) (add, configure, deploy).

Aside from the amount of work involved, one ContentCreator instance for n projects also means that n instances of the application are stored on the front-end side, which can potentially take up a lot of memory on the front-end server.

New functionality – ContentCreator as global, individualized web application: By contrast, the new functionality can be used to add individual web app components directly to the global web application. To do this, the desired web app component is simply added and deployed via the FirstSpirit ServerManager in the “Server Properties / Web applications” area. The added enhancements are now available to all projects on the server (for which no local project ContentCreator instance has been configured). If, for example, a JSP tag lib has been provided via the web app component, the corresponding tags can then be used in all projects. It is no longer necessary to create instances that are local to the project. Instead of n instances, only one instance now needs to be stored on the front-end side.

! This functionality is currently still in the beta stage and should not be used in live environments. It can be released on request in FirstSpirit version 5.2R3 via the e-Spirit Technical Support.

Further prerequisites:

Scope: The introduction of the new functionality has also changed the scope of the components. Previously, web applications only had “local web” visibility, i.e., after installing the module, they had to be added to the desired web areas in the projects and were then available in the relevant project.

A second, server-wide scope has now been added to this existing scope. The `scopes` attribute, which can be used within the module declaration, has been added for this purpose. Possible values:

```
<web-app scopes="global">
```

```
<web-app scopes="project">
```

```
<web-app scopes="global, project">
```

If a new web application is added via the ServerManager in the “Server Properties / Web applications” area, only components with the `global` scope can be assigned to this application. Conversely, only



web components with the `project` scope can be assigned to a project (in the “Project Properties / Web components” area).

For developers, web app components differ according to their scope with regard to the information available via the “SpecialistsBroker”. Web applications that are local to a project have a “WebEnvironment” which inherits from the “ProjectEnvironment” and they receive (via the `#getBroker` method) a (project-specific) instance of the type `SpecialistsBroker`.

For global web applications, the “WebEnvironment” returns a project-independent instance of the type `SpecialistsBroker` when `#getBroker` is called, and therefore returns “null” when `#getProject` is called.

```
<module>
  ...
  <components>
    ...
    <web-app scopes="global">
      ...
    </web-app>
  </components>
</module>
```

Configuration: The configuration options of the web components also need to be looked at in more detail according to the scope. Previously, a configuration for a web application was always local to a project, i.e., special values could be entered in the relevant configuration GUI for each individual project. For a global web application, the initial configuration can only take place at a global level. However, it is also possible to carry out an additional configuration that is local to a project for global web app components, e.g., via an additional project application which is also part of the module.



```
<module>
  ...
  <components>
    ...
    <web-app scopes="global">
      ...
      <configurable> MyGlobalAppConfigPanel </configurable>
    </web-app>

    <project-app>
      ...
      <configurable> MyProjectAppConfigPanel </configurable>
    </project-app>
    ...
  </components>
</module>
```

For more information on developing and configuring web applications, see also

- *FirstSpirit Manual for Administrators*, chapter “Web applications”
- *FirstSpirit Developer Manual for components (German only)*

44.30 Interface "DatasetProvider": Creating a new dataset 5.2R19

The new method `createDataset()` in the interface `DatasetProvider` (package `de.espirit.firstspirit.access.store.contentstore`, FirstSpirit Access API) a new dataset can now be directly created within a data source (interface `Content2`) as well as in a database (interface `Tabletemplate`). Until now, a detour via a corresponding entity was necessary.

44.31 Interface "Executable" (package "de.espirit.firstspirit.access.script") improved 5.2R13

The signature of the method `execute` in the interface `Executable` (package `de.espirit.firstspirit.access.script`, FirstSpirit Access-API) no longer uses `ExecutionException` (`de.espirit.firstspirit.access.script.ExecutionException`) and is therefore easier to implement.



44.32 Interface "PasswordAgent": encrypt passwords through the API

5.2R19

FirstSpirit version 5.2R16 already introduced optionally encrypted passwords in FirstSpirit configuration files (see *FirstSpirit Manual for Administrators*, chapter "FirstSpirit Server configuration / Configuration files (FirstSpirit Server) / FirstSpirit Server (fs-server.conf) / Password encryption". Now a new API is introduced to provide this capability to module developers (to encrypt module passwords).

The API can be accessed through an agent `de.espirit.firstspirit.agency.PasswordAgent` (FirstSpirit Developer API).


44.33 Isolated mode (BETA) - Realignment of module development 5.2R6

FirstSpirit extensions are implemented using Java. The integration of an external implementation into the FirstSpirit server and FirstSpirit client applications (FirstSpirit SiteArchitect, FirstSpirit Server-Manager, ...) is done via the FirstSpirit APIs (Access API and Developer API). These provide access to FirstSpirit-internal information, services, and functionality.

During run-time, the file `fs-server.jar` (or `fs-client.jar`) is in the class path. Besides the FirstSpirit APIs, the file `fs-server.jar` also contains internal FirstSpirit classes and various libraries (see diagram below).

Module development (previous behavior): Until now, all contents of the file `fs-server.jar` are started in the Java VM. This means that the VM class loader has access to not only the official FirstSpirit interfaces but also the internal classes and libraries contained in the JAR file (see diagram):



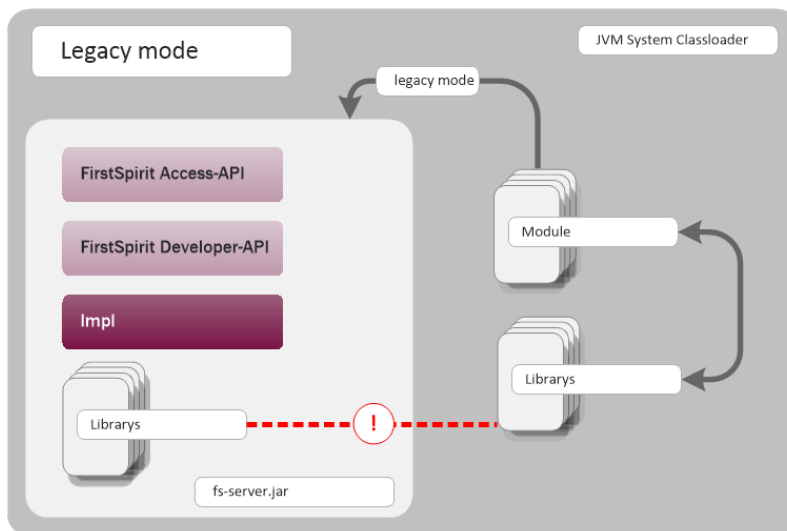

Module development (previous behavior)


Known disadvantages are:

- The libraries contained in the file `fs-server.jar` (e.g. Log4J; Apache Commons) lead to global dependencies. Conflicts may arise e.g. when the FirstSpirit server uses a library and a module developer attempts to use the same library in a different (newer) version. A module-local replacement of specific libraries is currently not possible.
- The libraries contained in the file `fs-server.jar` are not guaranteed product components and thus do not adhere to an orderly change management (as opposed to the FirstSpirit APIs). The version of a library that is included in `fs-server.jar` depends upon the FirstSpirit version in use. This implies that conflicts may also arise during upgrade and downgrade of a FirstSpirit server. If the version of a library is changed on the server, incompatibilities with already installed modules that use the same library may arise.
- Further potential for conflict arises from uncontrolled use of internal implementation classes that are also contained within `fs-server.jar`. Because these are accessible in the JVM class loader hierarchy, they can unofficially be used by module implementations. At face value, this is a convenient workaround if a method is not available in the official APIs, but these internal classes are of course not covered by stability guarantees and may be changed at any time.

Module development in “isolated mode” (future behavior): In “isolated mode”, the FirstSpirit APIs continue to be included in `fs-server.jar` (`fs-isolated-server.jar`). Thus, all methods and



interfaces of the API are visible to the class loader and may be used for module development (see diagram below). In order to establish connections and carry out further essential functionality, a minimal infrastructure in the form of internal classes is required (“basic infrastructure”, see diagram). These internal infrastructure classes, too, are visible to the class loader. In isolated mode, all further internal classes (“Impl”) and the libraries previously included in `fs-server.jar` are no longer contained in the class loader hierarchy. These contents will be relocated to a hidden area (in a directory within the JAR file) and can no longer be located by the class loader (“hidden” area, see diagram). Thus, conflicts can no longer arise if a module uses a library that is already contained in `fs-server.jar` in a different version. However, conflicts with other modules that attempt to use different versions of the same library may still arise if these libraries are included with a global scope.

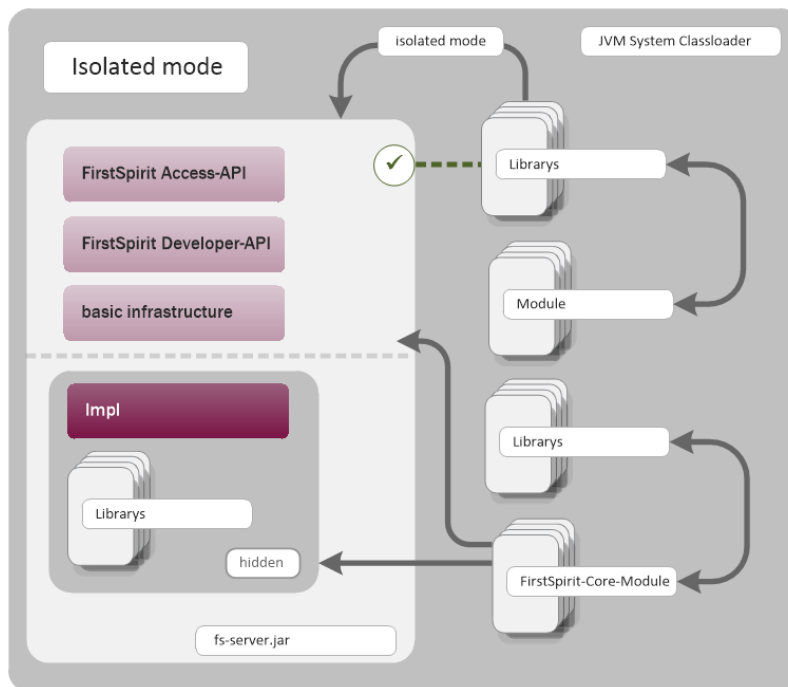

Module development (future behavior)

Goals and advantages of isolated mode:

- greater freedom in the selection of libraries to be used
- extensive avoidance of global dependencies to other product components
- overall, module development becomes more secure and more stable



- improved module maintenance
- reduced migration efforts when upgrading or downgrading a FirstSpirit server

Timeline: Introduction of isolated mode (subject to change): As of the current FirstSpirit version, operation of the server in isolated mode is optional. Configuring the server to operate in isolated mode is easy but requires deliberate action. In order to ensure compatibility with existing modules, the previous behavior (“legacy mode”) continues to be supported and is the standard behavior throughout the entire 5.2 version line. This means that modules that were designed to rely upon internal libraries can continue to be used. This does not require adjustments.

With FirstSpirit 6.0, “isolated mode” will be used as the new standard behavior. The previous behavior will be deprecated as of FirstSpirit 6.0.

Complete documentation about the realignment of module development: *Isolated mode [Beta]* (→*Manual for Module Developers*) (*FirstSpirit Developer Manual for components (German only)*), accessible from “FirstSpirit Online Documentation” (ODFS) via the navigation menu in the left sidebar.)

44.34 Making media language-dependent or language-independent via API

5.2R16

In FirstSpirit SiteArchitect, media may be converted between being language-dependent and language-independent via the context menu item “Extras / Make medium language-(in)dependent”.

Using the methods

- `makeLanguageDependent`
- `makeLanguageIndependent`

of the interface `Media` (package `de.espirit.firstspirit.access.store.mediastore`, FirstSpirit Access API), this conversion may now be carried out via the API as well. Thus, this functionality can now be offered on a project-specific basis in `ContentCreator`.

The call to the method `makeLanguageDependent` may specify several languages to which the currently language-independent medium's content and description will be copied.



44.35 Method `save()` observes the option "Server locks in content store"

5.2R2

The project properties in `ServerManager` offer the option "Server locks in content store" (`ServerManager / Project / Properties / Options`). If this option is activated, data sources can only be edited by one user exclusively; other users cannot modify datasets in that data source concurrently.

Attempts to save a `Dataset` object via the API method `save()` without a preceding lock operation via the method `lock(true)` will cause

- saving to fail with an error message (in the form of "java.lang.IllegalStateException: dataset 321 not locked") if this option is **active**,
- a warning (in the form of "WARN 05.10.2015 15:14:59.001 (de.espirit.firstspirit.store.access.contentstore.DatasetImpl): dataset 321 not locked. please make sure the dataset is locked prior to saving.") to be logged to the file `fs-server.log` if the option is **not active**. In this case, saving is possible.

For further information about the option "Server locks in content store", see

- *FirstSpirit Manual for Administrators*, Chapter "Options"
- *Documentation for FirstSpirit SiteArchitect*, Chapter "Procedure in multi-user operation"

44.36 Methods for determining the absolute path to the schedule entry directory

5.2R2

Using the new `getFolderPath` method in the `JobAgent` interface (FirstSpirit Developer API, Package `de.espirit.firstspirit.scheduling.agency`), it is now possible to access the absolute path to the entry directory.

44.37 Modifying `FeatureDescriptor` objects stored server-side via API

5.2R12


With newly-created API means, it is now possible to modify `FeatureDescriptor` objects stored server-side and to save them again. A typical use case is storing a `FeatureDescriptor` with a current revision



(method `createFeatureBuilder` of the interface `FeatureAgent`, package `de.espirit.firstspirit.feature`, FirstSpirit Developer API).

44.38 Multi Perspective Preview: Creating and configuring viewports via API 5.2R6

With the functionality “Multi Perspective Preview” (MPP), FirstSpirit supports editors in controlling how web page content is displayed and navigated in display sizes of various output devices and in optimizing layouts and images for specific output devices. Each output device may be represented by a so-called viewport. Thus far, viewports of a project were defined and configured via project settings in FirstSpirit ServerManager (“Options / Configure preview viewports”):

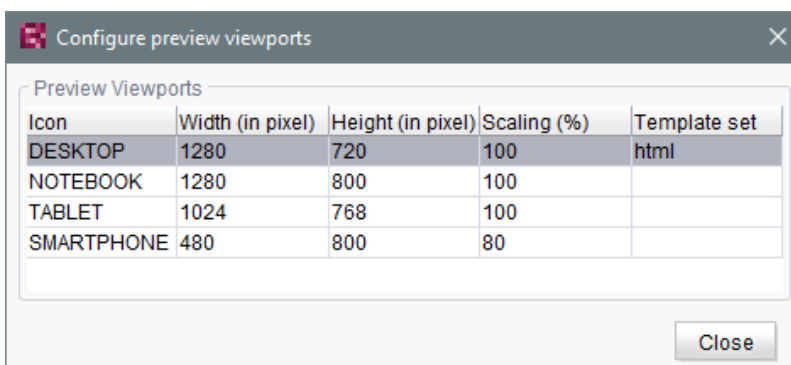

As of the current FirstSpirit version, such viewports can now be created, modified, and deleted via API. The package `de.espirit.firstspirit.access.project.mpp` (FirstSpirit Developer API) contains the following interfaces:

- Interface `MPPViewport` (represents a viewport)
- Interface `MPPViewport.Builder` (creates a viewport)
- Enum `MPPViewport.IconType` (icon type for a viewport)
- Interface `MPPViewportAgent`
- Interface `MPPViewports` (query viewports defined for a project and create/delete a viewport)



Note: When configuring multiple viewports, care should be taken that no two identical viewports (with identical values) are defined, and negative values should not be used.

For further information, see *Template development / JavaScript APIs / Multi Perspective Preview* (→*FirstSpirit Online Documentation*) and *FirstSpirit SiteArchitect / FirstSpirit AppCenter / Integrated preview / Multi Perspective Preview* (→*Documentation FirstSpirit SiteArchitect*).

44.39 New API interface "ConnectionExtractor" allows access to the connection of the logged-in user 5.2R16

The new interface `ConnectionExtractor` (package `de.espirit.firstspirit.web`, FirstSpirit Developer API) offers access to the connection of the logged-in user (within the FirstSpirit web applications (ContentCreator, Preview, Staging)) via the method `extractConnectionFromRequest(HttpServletRequest)`.

The connection may be used to simplify the communication (e.g. passing of parameters) between FirstSpirit and a third-party application (e.g. integration of third-party content or, in general, in servlet and filter environments).

44.40 New API interface "ProjectMembersAgent" provides information about users and groups 5.2R15

The new FirstSpirit Developer API interface `de.espirit.firstspirit.agency.ProjectMembersAgent` now provides access to information about users and groups of a project, e.g.

- Method `getGroups`: returns all groups of the current project
- Method `getUsers`: returns all users of the current project
- Method `getUserByLogin`: returns the user associated with a given login name
- Method `getGroupByName`: returns the group associated with a given group name
- Method `getUserGroups`: returns the group the specified user belongs to



In the course of this improvement, the existing interface `GroupsAgent` of the same package, which provides similar functionality, has been marked *deprecated* and will be removed in May 2018.

If methods, classes, and interfaces that are no longer supported or are set to deprecated are used in scripts and/or modules, entries are written to log files accordingly (e.g., server log, generation log, etc.). The corresponding log entries should be checked and the cause(s) remedied.

Methods set to the “deprecated” state can still be used, but as they will be omitted in subsequent versions, this is not advisable.

44.41 New Interfaces to Open Version Comparison and Merge Dialogs

5.2R3


FirstSpirit version 5.2R3 introduces new interfaces (both in the package `de.espirit.firstspirit.ui.operations`, FirstSpirit Developer-API) to support comparison and merge functionality, respectively, for revisions:

- `OpenComparisonDialogOperation`
- `OpenMergeDialogOperation`

Example for `OpenComparisonDialogOperation`:

```
import de.espirit.firstspirit.agency.OperationAgent;
import de.espirit.firstspirit.ui.operations.OpenComparisonDialogOperation;
import java.io.StringReader;
operationAgent = context.requireSpecialist(OperationAgent.TYPE);
operation = operationAgent.getOperation(OpenComparisonDialogOperation.TYPE);
operation.setDialogTitle("Title");
operation.setOriginalHeader("Original");
operation.setModifiedHeader("Modified");
originalText = "Deleted My Original Text";
modifiedText = "My Modified Text Inserted";
operation.perform(originalText, modifiedText);
return 0;
```



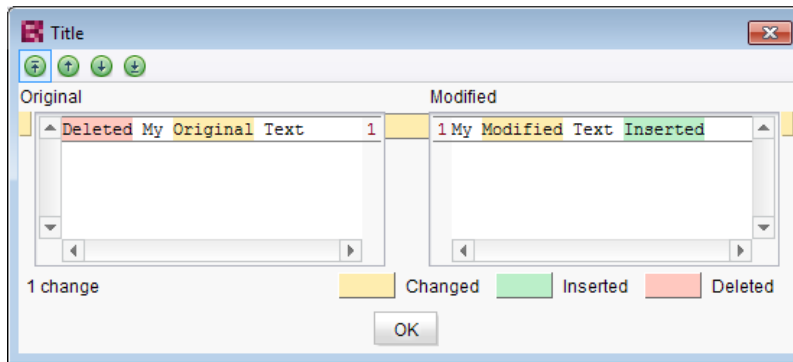


Comparison (OpenComparisonDialogOperation)

Example for OpenMergeDialogOperation:

```
import de.espirit.firstspirit.agency.OperationAgent;
import de.espirit.firstspirit.ui.operations.OpenMergeDialogOperation;
import java.io.StringReader;

operationAgent = context.requireSpecialist(OperationAgent.TYPE);
operation = operationAgent.getOperation(OpenMergeDialogOperation.TYPE);
operation.setDialogTitle("Title");
operation.setOriginalHeader("Original");
operation.setModifiedHeader("Modified");
originalText = "Deleted\nSome\nOriginal\nText";
modifiedText = "Some\nModified\nText\nInserted";
resultingText = operation.perform(originalText, modifiedText);
print("Merge result = '" + resultingText + "'");
return 0;
```

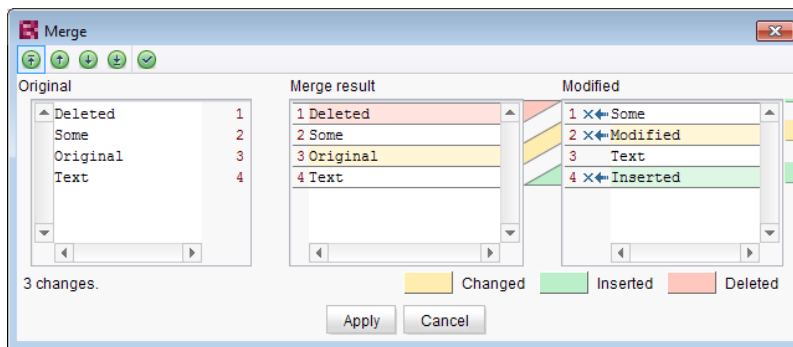

Merge (OpenMergeDialogOperation)



44.42 New Method for Cancelling Maintenance Mode 5.2R3

FirstSpirit supports a maintenance mode which may be used to shut down the server at a pre-planned time in order to perform updates or other system maintenance. Depending on configuration, users may be prohibited from logging onto the FirstSpirit server or opening specific projects, while currently logged on users will receive a notification that the FirstSpirit server is about to be shut down. Maintenance mode is controlled by a schedule task (ServerManager / Server / Properties / Schedule Management / Action “Maintenance mode”). In this task, the duration of maintenance mode may also be specified (option “Estimated duration”).

Maintenance mode

Notification to display

Display notification on web page for all projects

Period durations (each period begins as the previous expires):

1. Display notification after 30 minutes

2. Show End Sessions warning after 15 minutes

3. Refuse new sessions after 5 minutes

4. Start maintenance mode after 5 minutes

5. Estimated duration 15 minutes

End sessions during maintenance, refuse new sessions

Refuse to start tasks

Apply to all projects

Apply to projects

Do not apply to users

Do not apply to groups

OK Test configuration Cancel

Configuration of a maintenance mode task

The new method `boolean stopMaintenance(long scheduleEntryId)` (FirstSpirit Access API, Package `de.espirit.firstspirit.access`, Interface `AdminService`) may be used to cancel maintenance mode via the API, e.g. if the maintenance tasks have been completed sooner than planned (and specified in the schedule task's “Maintenance mode” action).



The ID of the schedule task that was used to start maintenance mode must be provided using the parameter `scheduleEntryId`. The method returns `true` if maintenance mode was cancelled successfully.

For further information about configuring maintenance mode, see *FirstSpirit Manual for Administrators*, chapter “Maintenance mode”.

44.43 New functions in "WE-API" 5.2R20

With the TPP API's new `setPreviewElement` WebApps can now set the ContentCreator's `PreviewElement`, thus allowing users to work with the toolbar (workflows etc.), just as they know it from “classic” FirstSpirit projects.

The new function `addPreviewRequestHandler` makes it possible for WebApps to react appropriately when an editor clicks on a page or section in the report area.

44.44 New interfaces and methods for implementing personal schedule actions 5.2R3

FirstSpirit schedule entry planning enables time-controlled execution of actions (“tasks”) at server/project level. Associated actions can be combined in one schedule. From FirstSpirit version 5.2R3 onward, the following FirstSpirit Developer API interfaces and methods enable the implementation of further functions for self-implemented actions, which can be used to access and further process information from other actions, for example:

- `Generating interface` (`de.espirit.firstspirit.scheduling.aspects` package):
This interface is used to identify a generation schedule and, for example, to query the status of the schedule and the number of generated pages.
- `GenerationAgent interface`
(`de.espirit.firstspirit.scheduling.agency` package):
This interface is used specifically to respond to generation schedules.
- `getAspect method`
(`ScheduleTaskControl` interface, `de.espirit.firstspirit.scheduling` package):
Provides aspects of the current schedule.



- `configureGenerateTask(@NotNull ScheduleTaskControl control)` method (DeltaGeneration.ChangeSet interface, `de.espirit.firstspirit.access.schedule` package): Configures a control object.

For more information, see also *FirstSpirit Online Documentation*, “Plug-In Development / Server Plug-Ins / Schedule Tasks”.

44.45 New method "getServiceConfig" in interface "ModuleAdminAgent"

5.2R12

The new method `getServiceConfig` of the interface `ModuleAdminAgent` (package `de.espirit.firstspirit.agency`, FirstSpirit Developer API) provides access to the directory containing the configuration files of a service of a module (analogous to `getProjectAppConfig` and `getWebAppConfig`). This requires server administrator privileges.

44.46 Obtaining the most recent login date of a user via API 5.2R16

The package `de.espirit.firstspirit.agency` (FirstSpirit Developer API) contains a new interface, `UserStatisticsAgent`. The newly-implemented method `getLastLoginAsDate(long)` in this interface may be used to obtain the date on which a user with a given ID most recently logged on to the FirstSpirit server. Due to reasons relating to data privacy, the time component of this information will always be set to 0000h (12 a.m.).

44.47 Reacting to page navigation events in ContentCreator 5.2R13

`ContentCreator` provides a JavaScript API which allows control of some aspects of the user interface and the preview. This API's `Common` object has been extended with the method `addPreviewElementListener(PreviewElementListener listener)`. The listener receives events pertaining to changes of the current preview element in `ContentCreator`. If a page navigation event is detected, the listeners' `onChanged(FSID)` function will be called. Depending on the current preview element, the FSID of the page reference or the FSID of the content projection will be passed as a parameter.

This API is accessed via the JavaScript object `top.WE_API`. The API can be used in preview HTML as well as in JavaScript-based actions (e.g. `InlineEdit` buttons or report actions). Additionally, the JavaScript API for `ContentCreator` can be used from within FirstSpirit scripts and executable classes by using



a specialized operation (see *Template development / JavaScript APIs / ContentCreator* (→*FirstSpirit Online Documentation*)).

Example:

```
<script type="text/javascript">
function handlePageReload(fsid) {
  if (fsid.getContentId() != -1) {
    // Page is based on a dataset
    console.log("This page is based on a dataset with contentID "
      + fsid.getContentId() + " and content2ID " + fsid.getContent2());
  } else {
    // Page is based on a "normal" Pageref
    console.log("This page has the pagerefID " + fsid.getPageref());
  }
}
// Register function "handlePageReload" as a page reload listener
top.WE_API.Common.addPreviewElementListener(handlePageReload);
</script>
```

44.48 Recalculation of references for individual elements via ProjectReferencesAgent 5.2R3

If a project contains broken references, the project-level schedule activity “Repair references” may be used to recalculate references within the project. This task operates on the entire project and may take a long time to complete, depending on the project's size.

FirstSpirit version 5.2R3 introduces a new agent, `ProjectReferencesAgent` (FirstSpirit Developer API, package `de.espirit.firstspirit.agency`), which enables recalculation of references for individual elements using the method `rebuildReferences(IDProvider)`. The agent also provides a means to trigger recalculation of all references in the project via API (method `rebuildReferences()`).

44.49 RenderingAgent supports remote links 5.2R16

The interface `RenderingAgent` (package `de.espirit.firstspirit.agency`, FirstSpirit Developer API) supports remote links as well as of the current FirstSpirit version.



44.50 Repairing broken references (rebuildReferences) 5.2R7

Dependencies, also called “references”, exist between many FirstSpirit elements. These can be displayed via what is known as a “relation graph” (“Extras / Display dependencies” in the context menu or keyboard shortcut **Ctrl+R** on the required node in SiteArchitect). A distinction is made between “incoming” and “outgoing” references.

The `rebuildReferences(IDProvider)` method (FirstSpirit Developer API, interface `ProjectReferencesAgent`, `de.espirit.firstspirit.agency` package) can be used to repair “broken” references (which are restored or removed).

More inconsistencies (broken references) can now be repaired with the current FirstSpirit version than was possible in earlier FirstSpirit versions. If the references in question are “broken incoming” references, `rebuildReferences` may have to be called up for both the affected elements.

44.51 Retrieving global system web apps 5.2R20

Global system web apps can now also be retrieved with the new method `getGlobalWebApps(boolean includeSystem)` in the interface `ModuleAdminAgent` (package `de.espirit.firstspirit.agency`, FirstSpirit Developer API).

44.52 Saving Elements 5.2R18

Saving of store elements and datasets can now be triggered programmatically via the API using the new interface `SaveOperation` (package `de.espirit.firstspirit.store.operations`, FirstSpirit Access API).

Unlike save actions triggered via the graphical user interfaces, saving an element or dataset via `SaveOperation` may be carried out even if the object to be saved contains erroneous or invalid data, e.g. due to a rule infraction (method `setValidationEnabled(false)`).

The method `setRecursionEnabled` may be used to specify that child elements should also be saved.

Furthermore, the method `setComment` may be used to add a custom comment which will be shown in version history.



44.53 Schedules: Creating and configuring an archival schedule action via API (de.espirit.firstspirit.access.schedule.ProjectCleanupTask) 5.2R9

By using the schedule action “Archive old project states” (FirstSpirit ServerManager / Project properties / Schedule management / Add / Actions) it is possible to swap out files which are not longer required (automatically and regularly at a defined point in time), therefore increasing the performance of the FirstSpirit server.

Until now it was only possible to create and configure such a schedule using the graphical interface. With the current version of FirstSpirit, this can also be achieved by using the API. For this purpose the interface `ProjectCleanupTask` in the package `de.espirit.firstspirit.access.schedule` has been added (FirstSpirit Developer API).

44.54 SwingGadget Development: New Class "SwingFormViewMode" 5.2R9

A `SwingGadget` is the graphical representation of an input component in the FirstSpirit SiteArchitect. `SwingGadgets` are implemented in Java and contain graphical interface elements (“Swing”) like buttons and input components as well as functional aspects like saving values. Furthermore user interactions and changes are evaluated by `SwingGadgets` and transferred to the visual representation of the component. Classes and methods required for implementing `SwingGadgets` can be found in the package `de.espirit.firstspirit.ui.gadgets.swing` (FirstSpirit Developer-API).

With the current version of FirstSpirit this package has been extended by the class `SwingFormViewMode`. Previously this class was available in the non-public API. Making it accessible was necessary because the class `AbstractValueHoldingSwingGadget` existing in the same package `de.espirit.firstspirit.ui.gadgets.swing` contains a method using `SwingFormViewMode` as a return type.

Compiling against the `fs-api.jar` resulted in the error

```
The type de.espirit.firstspirit.ui.gadgets.swing.SwingFormViewMode cannot be resolved.  
It is indirectly referenced from required .class files
```

This error message no longer happens with the current version of FirstSpirit, the affected class is now part of the JAR file.



For more information regarding the implementation of SwingGadgets please see also *Plug-In Development / Universal Extensions / Input Components / SiteArchitect* (→*FirstSpirit Online Documentation*).

44.55 Triggering a preview update via API (SiteArchitect and Content-Creator) 5.2.615, 5.2R7

In order to make changes to data visible in the preview (SiteArchitect and ContentCreator), an update of the preview must be triggered. Generally, this happens automatically upon saving forms, sections, pages, datasets, etc.

As of the current FirstSpirit version, it is also possible to trigger a preview update via API for actions and changes that do not affect content-relevant data (e.g. changes made from within a workflow). In the past, preview updates could already be triggered in ContentCreator via `WE_API.Preview.reload()`.

In both SiteArchitect and ContentCreator, an update of the preview may now be triggered via the newly-implemented interface `PreviewOperation` (package `de.espirit.firstspirit.ui.operations`, FirstSpirit Developer API).

- The method `perform()` triggers a reload of the currently displayed preview.
- Using the method `setElement(IDProvider element)`, an ID of an element may be supplied for which the preview should be updated (page reference, page, section, dataset, medium, etc.). If the supplied element cannot be displayed in the preview, an error message indicating this will be output (“The element 'xyz' cannot be displayed in the preview.”).

Sample script to trigger a preview update for a page reference (ID 866948):



```
import de.espirit.firstspirit.agency.OperationAgent;
import de.espirit.firstspirit.ui.operations.PreviewOperation;
import de.espirit.firstspirit.agency.StoreAgent;
import de.espirit.firstspirit.access.store.Store;
// -- fetch element from site store
storeAgt = context.requireSpecialist(StoreAgent.TYPE);
sitestore = storeAgt.getStore(Store.Type.SITESTORE);
element = sitestore.getStoreElement(866948);
print(element);
// -- load and perform preview operation with element
operationAgt = context.requireSpecialist(OperationAgent.TYPE);
operation = operationAgt.getOperation(PreviewOperation.TYPE);
operation.setElement(element);
operation.perform();
```

44.56 Update of Web Applications 5.2R4

In its default configuration, a FirstSpirit server uses the integrated Jetty software as HTTP server and servlet engine. If Jetty is deactivated (`INTERNAL_SERVLET_ENGINE=0` in the file `fs-server.conf`), the local FirstSpirit web directory was not updated during an in-place update of the FirstSpirit server software. If this web directory was also used by another web server, this caused the software versions used by this web server to become outdated. As of FirstSpirit version 5.2R4, during every update of the FirstSpirit server software, the necessary roll-out of the web applications it contains will take place even if Jetty is deactivated.

Moreover, entries of web applications in the file `fs-webapp.xml` whose directories do not exist will be ignored during server start-up. This does not affect FirstSpirit's own web applications.

For further information, see *FirstSpirit Manual for Administrators*, chapters

- “Web server configuration (fs-webapp.xml)”
- “Web server”



45 Modules (general)

45.1 Distribution of FirstSpirit web applications as modules (.fsm) 5.2R4

The global web applications included in FirstSpirit (fs5root, fs5preview, fs5webedit, ...) are now provided as FirstSpirit modules (FSM files) - previously, these were provided as Zip files. This change supports a unified distribution mechanism and requires no manual configuration of a FirstSpirit server and/or FirstSpirit projects.

45.2 Distribution of the FirstSpirit web applications as modules (.fsm)

5.2R6

FirstSpirit version 5.2R3 implemented a new roll-out behavior for the FirstSpirit web applications: while the global web applications (fs5root, fs5preview, fs5webedit,...) have previously been distributed in the form of ZIP files, they are since distributed in the form of FirstSpirit modules (FSM files).

After a transition period, the previously used ZIP files have been permanently removed from the file `fs-server.jar` as of the current FirstSpirit version. This leads to a significant decrease in the file size of `fs-server.jar`.

45.3 Library dependencies added in FirstSpirit web applications 5.2.515,

5.2R6

Missing library dependencies have been added for all internal FirstSpirit web applications. The relevant `.jar` files have been added to the individual modules.

When updating the FirstSpirit Server, updating the following modules is recommended (assuming they are already installed):

- FirstSpirit Basic Search (“fs-search.fsm”)
- FirstSpirit Dynamic Database Access (“fs-integration.fsm”)
- FirstSpirit Security (“fs-security.fsm”)



46 Modules: Content Transport

46.1 Moving datasets and changing the explicit/implicit state of elements

5.2R20

The functionality “FirstSpirit ContentTransport” enables transport of project contents from a source project into a target project.

If folders have previously been added explicitly to a feature, the current child tree (i.e. all child elements at the time of export) was taken into account for each export. Therefore, if new child elements have been added to the folder since the feature was first created, these child elements will be included in the subsequent exports. For example, if child elements have been removed from the folder since the feature was first created, they will be missing in subsequent exports. In FirstSpirit version 5.2R20 and later, this rule is now also possible for datasets and data sources.

The following options for data sources can be selected:

- **Add Content Source:**

Only the selected data source (without datasets) is added to the feature (corresponding to the previous “Add to Content Transport feature” for data sources).

To include datasets in a transport, one of the following two options should be selected.

- **Add all displayed datasets (explicitly):**

The datasets currently displayed in the workspace are added to the feature (corresponding to the previous “Add all displayed datasets to feature” on data sources or “Add to Content Transport feature” on datasets). Datasets of the data source that are not displayed in the overview due to filtering, searches, etc., are not taken into account. In addition, no datasets are taken into account that are added to or deleted from the selected data source at a later point in time. If you want the current status of the datasets of the selected data source to be taken into account for future exports, select the option “Add all datasets (automatically via Content Source)”.

If you want to include not only the datasets in a transport, but also the data source, you can add it to the feature in the tree structure using the context menu option “Add Content Source” or activate the option “Content Source is part of the feature” in the “Included objects” section.

- **Add all datasets (automatically via Content Source)**



This adds all datasets of the data source to the feature. This also takes into account datasets that are not displayed in the overview due to filtering, searches, etc. During each transport, all datasets are exported that are contained in the data source at the time, including datasets that are created in the data source after the feature is created.

If you want to include not only the datasets in a transport, but also the data source, you can add it to the feature in the tree structure using the context menu option “Add Content Source” or activate the option “Content Source is part of feature” in the “Included objects” section.

Other functions:

- The “Add Content store folder” function adds all data sources contained in the folder to the feature (without datasets, similar to “Add Content Source”).
- The “Add Dataset” function adds only the selected dataset to the feature (similar to “Add all displayed datasets (explicitly)”).

The state of objects already added to the feature can be checked and modified in the “Included objects” area and in the workspace.

Included objects


In the “Included objects” area, the state is displayed as follows:

Add Content Source:



The name of the data source is displayed in normal text. The number of datasets taken into account is (0). You can check and modify the implicit/explicit state if necessary by right-clicking (see below). Alternatively, the state can also be checked in the workspace and modified if necessary.


Add all displayed datasets (explicitly):



The data source is not part of the feature. Only the datasets contained at the time the feature was initially created are taken into account during transport. The number of datasets taken into account, in addition to the “manually selected” note, is displayed in brackets after the name of the data source and in a dataset node under the data source.



You can check and modify the implicit/explicit state if necessary by right-clicking (see below).
If the data source is also to be included in transport, it can be added to the feature in the tree structure using the context menu entry “Add Content Source” or by activating the option “Content Source is part of feature” in the “Included objects” area. The display is then as follows:




Add all datasets (automatically via Content Source):




The data source is not part of the feature. All the datasets contained in the data source at the respective time are taken into account during transport. The number of datasets taken into account, in addition to the “automatically via Content Source” note, is displayed in brackets after the name of the data source and in a dataset node under the data source.

You can check and modify the implicit/explicit state if necessary by right-clicking (see below).
If the data source is also to be included in transport, it can be added to the feature in the tree structure using the context menu entry “Add Content Source” or by activating the option “Content Source is part of feature” in the “Included objects” area. The display is then as follows:




Implicit/explicit state

The state of an object as implicitly or explicitly added element can now be checked and modified for all object types simply by right-clicking on the desired element under “Included objects” (“implicit/explicit state”):



Active / box ticked: The object was explicitly added. The object can be removed from the feature by clicking on the tooltip (corresponds to the “x” icon). Elements with this state are also identified by a “briefcase” icon.



Active / box not ticked: The object has been implicitly added as the parent element. The object can be explicitly added to the feature by clicking on the tooltip. All child elements are also added automatically.



Inactive / box ticked: The object was implicitly added as a child element. The implicit/explicit state for these elements can only be modified from the parent node.

For data sources with datasets, the following additional options can be selected (right-click on the dataset node):

- **Automatically add all datasets of the content data source to the feature:** If this option is active (ticked), all the datasets contained in the data source at the respective time are taken into account during transport. If this option is inactive (not ticked), only the datasets contained at the time the feature was first created are taken into account during transport. If required, the option can be activated or deactivated by clicking on it.
- **Remove all datasets:** By clicking on the tooltip, all datasets including the data source can be removed from the feature (corresponds to the “x” icon).

As part of an effort to standardize context menus, the new layer in the context menu for adding objects to a feature in the tree view is now also valid for all other object types (old: “Add to Content Transport feature”; new: “Add Content Transport / Add <object type>”).

47 Modules: Corporate Content

47.1 Allowed section templates are now only "optionally" required during an import process 5.2R13

Restrictions can be defined for page templates (for each content area) with regard to the allowed section templates (“Properties / Content areas” tab, “selected” option, “Allowed section templates” area):






The dependencies between page template and section template(s) when using “FirstSpirit Content Transport” were previously classified as “required”. This meant, for example, that all of the allowed section templates belonging to a specific page template had to be imported at the same time as the page template. If the respective templates were missing in the target project, it was not possible to carry out the import. This prompted the following error message:

```
ERROR 10.02.2016 09:53:49.958 (de.espirit.firstspirit.impl.access.ScriptContextImpl):
Could not Install feature.
de.espirit.firstspirit.store.access.feature.FeatureInstallException: Error installing
feature. Broken id reference (id=57371, projectId=8, uid='home',
type=SectionTemplateImpl)
```

In the current FirstSpirit version, such dependencies between page template and allowed section templates are now classified as “optional”: It is possible to carry out an import even if the target project does not contain the dependent templates. In this case, the non-resolvable dependencies are removed from the page template in the target project, i.e., the configured allowed section templates in the page template if the section templates are missing in the target project.




Use the “Required missing references” or “Optional missing references” area to view the missing dependencies for a FirstSpirit object:

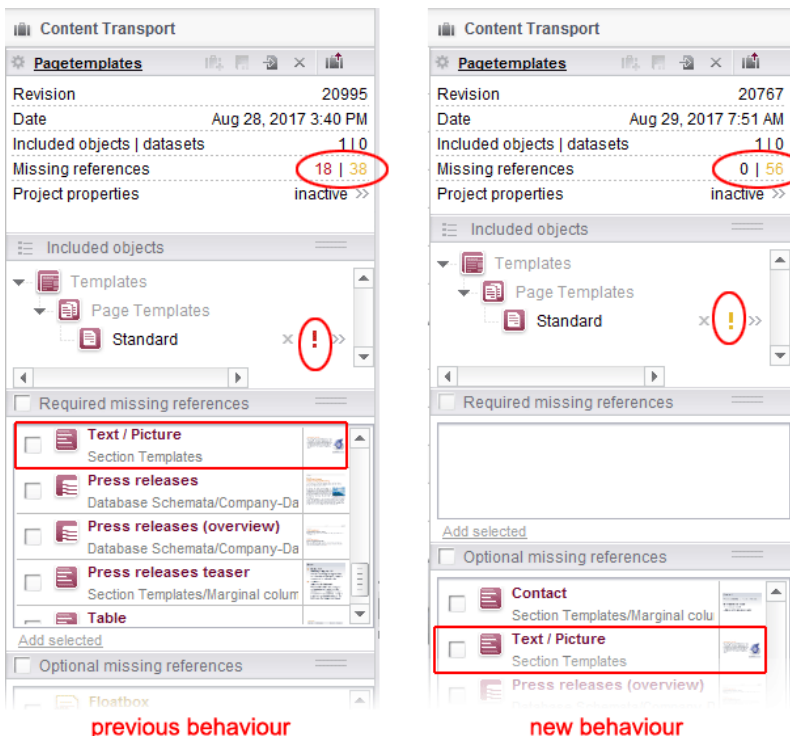

47.2 ContentTransport: Archival of deleted feature collections 5.2R7

The functionality “FirstSpirit ContentTransport” enables transport of project contents from a source project into a target project. The desired contents are bundled or collected into so-called “features”.

Features in the dialog “Create or load a feature” / “Load feature from server” / “Choose”

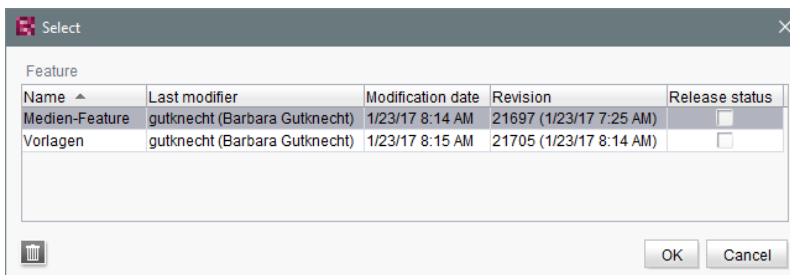

may be deleted from the server using the “Delete” icon:





As of the current FirstSpirit version, these deleted features may be archived and thus removed from the FirstSpirit repository via the schedule action “Archive old project states”. To do so, activate the option “System data” in the schedule action:

The screenshot shows a dialog box titled "Project archiving" with a close button (X) in the top right corner. The dialog is divided into four sections: "Version history", "Objects", "Options", and "Runtime".

- Version history:** Three radio buttons are present. The first is "Maintain version history completely (no archiving)", the second is "Maintain version history at least 120 day(s) (partial archiving)", and the third, "Do not maintain version history (complete archiving)", is selected.
- Objects:** Three checkboxes are present. "Content, media and data content" is unchecked, "Templates" is unchecked, and "System data" is checked and highlighted with a red rectangular box.
- Options:** Three radio buttons and one checkbox are present. The first is "archive only objects marked as deleted", the second, "archive deleted objects and version history that is no longer required", is selected. The third is "Waiting time per archiving step 0 ms", which is unchecked.
- Runtime:** Two radio buttons are present. The first is "Limit maximum archiving runtime per run to 60 minutes", which is unchecked. The second, "Do not limit archiving runtime", is selected.

At the bottom of the dialog are "OK" and "Cancel" buttons.

The most recent revision will not be deleted.

For further information, see

- Module documentation for “FirstSpirit CorporateContent”, chapter “Creating or loading a feature”
- *FirstSpirit Manual for Administrators*, chapter “Archive old project states”




47.3 ContentTransport: Deleting feature collections 5.2.611, 5.2R7

The functionality “FirstSpirit ContentTransport” enables transport of project contents from a source project into a target project. The desired content is collected into so-called “Features”. Via the button “Save feature”



such a feature may be stored on the server.

In order to simplify the selection of a feature, the “Select” dialog (reached via “Create or load a feature / Load feature from server”) has been improved:

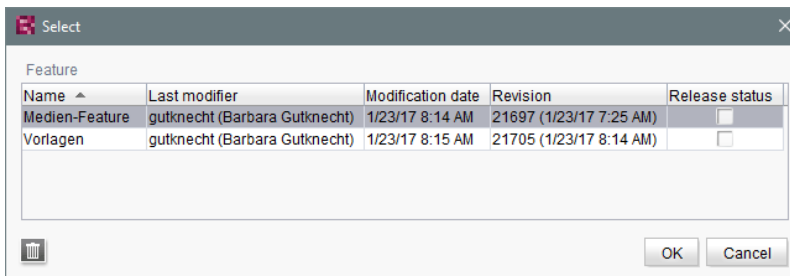

The dialog now allows sorting by column and provides detailed information about a feature in a tool-tip.

Furthermore, in order to improve readability of the feature list, features that were once stored on the server but are no longer needed may now be deleted from the server. Via the button “Delete”



the selected feature or features may be deleted following a confirmation request. Selection of multiple features is possible.

Deletion of feature collections is final and cannot be undone.

For further information, see Module documentation for “FirstSpirit CorporateContent”, chapter “Content Transport / Creating or loading a feature”.



47.4 Editing multiple packages 5.2R4

The functionality “FirstSpirit Corporate Content” allows automatic distribution of content between different projects on a server.

Creation and maintenance of packages can be carried out via the link “Create or edit a package” or the icon



in the area “Corporate Content” in FirstSpirit SiteArchitect.

Previously, if a package was already opened for editing, the message “You are already editing package '[package name]'. Please close this package first.” When creating a new package, this message was displayed only after configuration of the package via the dialog “Create package” took place, and the new package was created regardless of this notification.

As of FirstSpirit version 5.2R4, this message will no longer be displayed. Instead, the newly created or loaded project will be displayed. If another package was loaded already, any modifications to that package will be saved automatically before the newly created or loaded package is displayed.


For further information, see *Documentation for FirstSpirit Corporate Content*, chapter “Creating or loading a package”.

47.5 Multisite Management: Export of image resolutions 5.2.611, 5.2R7

The multisite management functionalities “FirstSpirit ContentTransport” and “External Synchronization” enable transport of project contents as well as of project properties, e.g. languages, resolutions, etc.


If resolutions are transported from a source project into a target project using ContentTransport or External Synchronization, e.g.



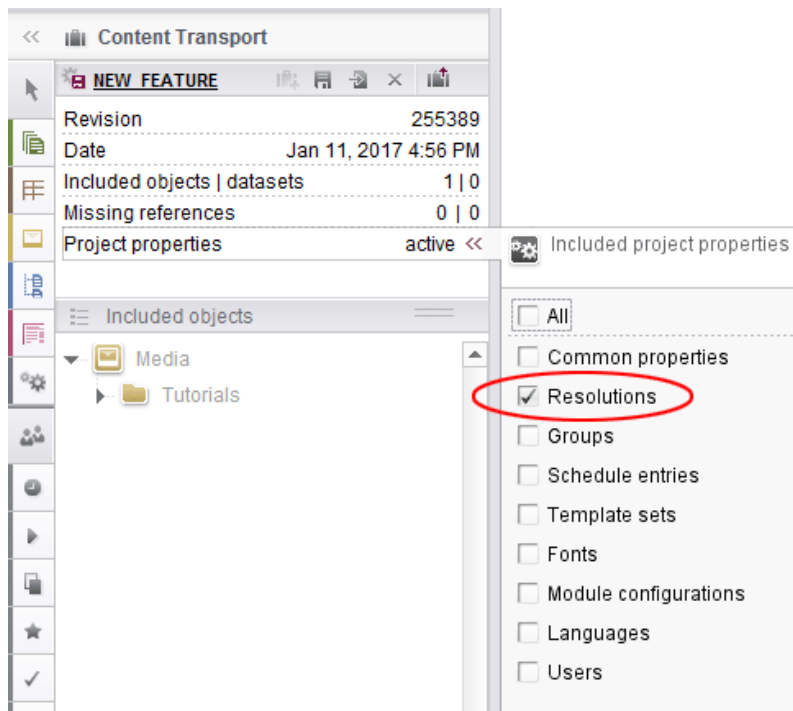


the order of resolutions in the target project now matches their order in the source project.

Display in ServerManager, area "Resolutions":

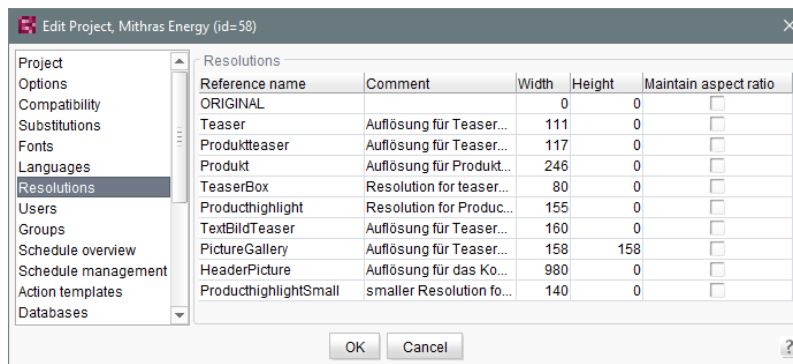

Display in the Media store of SiteArchitect:



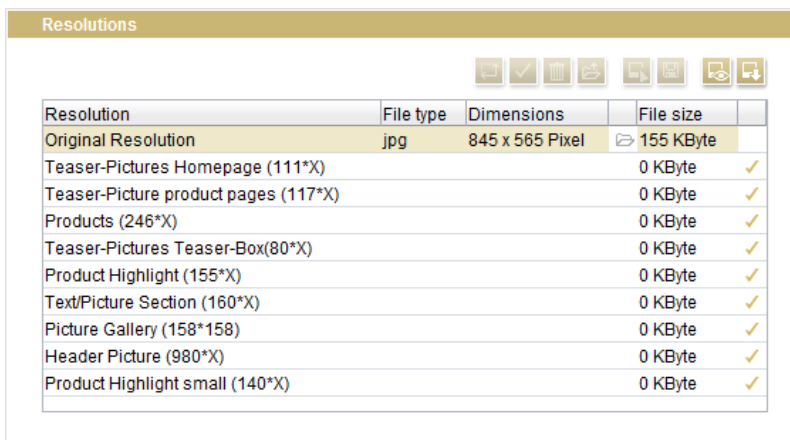

| Resolution | File type | Dimensions | File size |
|--------------------------------------|-----------|-----------------|-----------|
| Original Resolution | jpg | 845 x 565 Pixel | 155 KByte |
| Teaser-Pictures Homepage (111*X) | | | 0 KByte ✓ |
| Teaser-Picture product pages (117*X) | | | 0 KByte ✓ |
| Products (246*X) | | | 0 KByte ✓ |
| Teaser-Pictures Teaser-Box(80*X) | | | 0 KByte ✓ |
| Product Highlight (155*X) | | | 0 KByte ✓ |
| Text/Picture Section (160*X) | | | 0 KByte ✓ |
| Picture Gallery (158*158) | | | 0 KByte ✓ |
| Header Picture (980*X) | | | 0 KByte ✓ |
| Product Highlight small (140*X) | | | 0 KByte ✓ |

Previously, resolutions were ordered by reference name after export/import.

In order to apply the new behavior, a new export must be made.

For further information, see


- Module documentation for “FirstSpirit CorporateContent”
- *FirstSpirit Manual for Administrators*, chapter “Resolutions”

47.6 Multisite Management: Transport of table templates into projects with different language counts 5.2.615, 5.2R7

The multisite management functionalities “FirstSpirit ContentTransport” and “External Synchronization” enable transport of project contents and project properties from a source project into a target project.

If a table template is transported from a source project into a target project which is configured with a different set of languages, the columns of languages that are not present in the source will be removed in the target project. Until now, this also caused removal of the mapping for these additional, non-present languages in the target project, e.g.




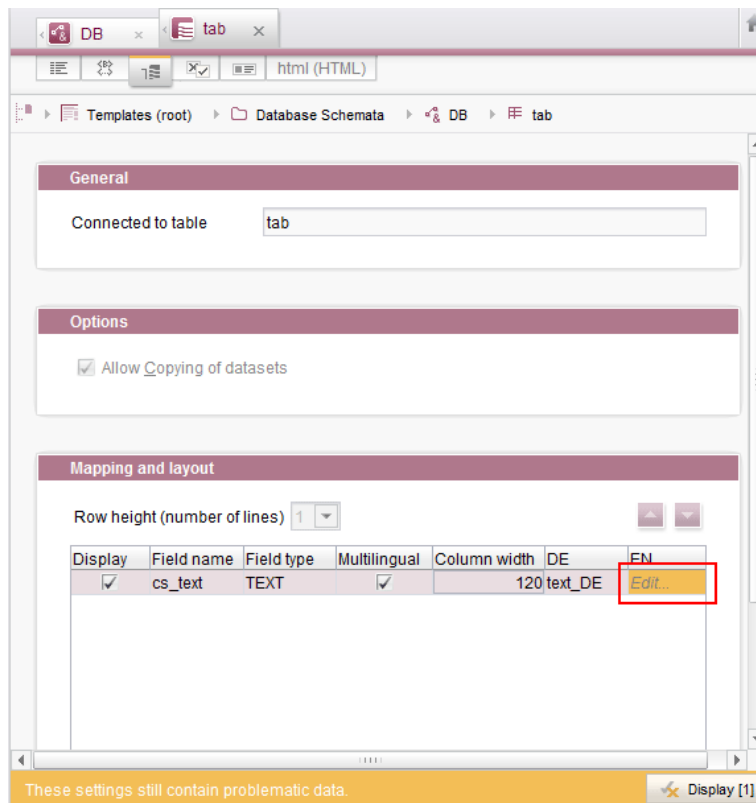


In this case, the mapping had to be adjusted manually if the missing language column was added to the database schema in the target project.

As of the current FirstSpirit version, the mapping will be preserved. In the “Mapping” tab, the missing language column will be visualized with a red highlight after import into the target project:



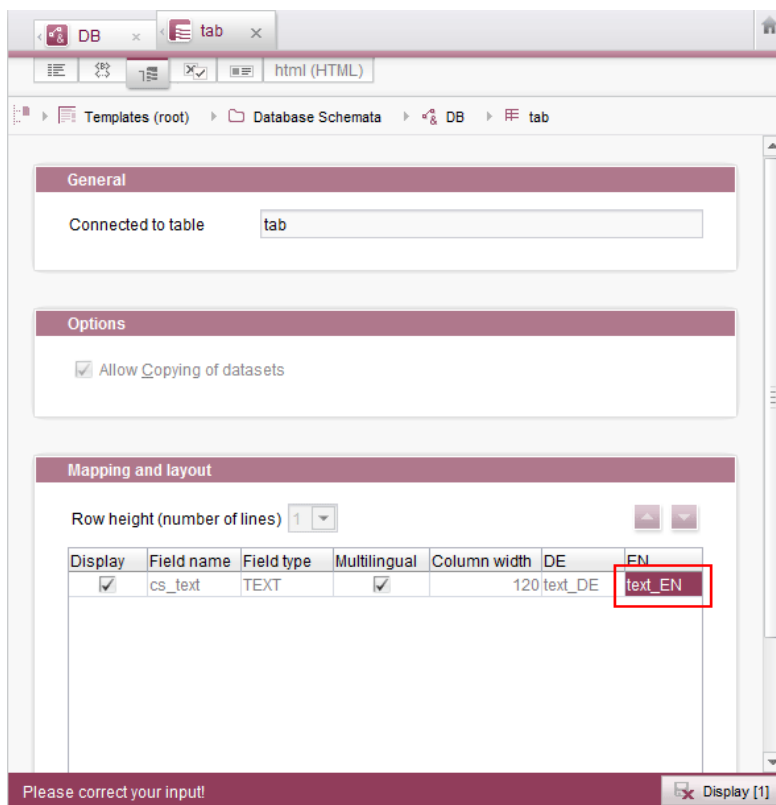

In order to restore the mapping, it is now sufficient to create the missing language column anew in the database schema, e.g.:

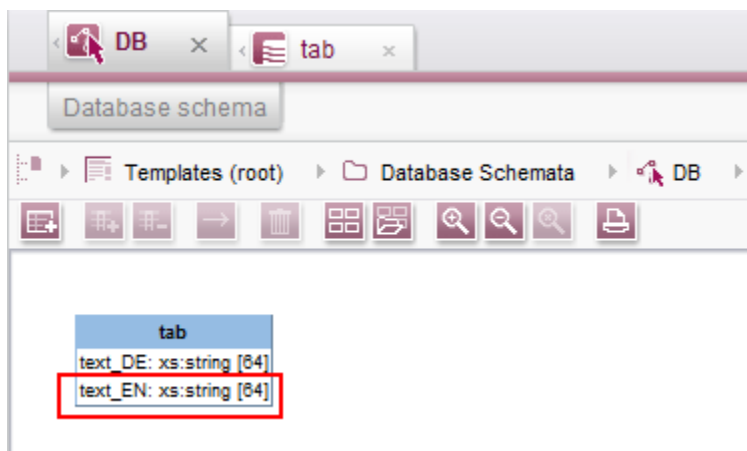

The mapping will then be adjusted automatically.




47.7 Refresh package display 5.2R4

The functionality “FirstSpirit Corporate Content” allows the automated distribution of templates and content among various projects on a server, such that content can be reused comfortably across FirstSpirit projects.

A package with its contents and properties can be shown in the area “Corporate Content” in “Multisite Management”.

Using the new icon (from FirstSpirit version 5.2.312) in the icon bar, the display of the current package can be refreshed:

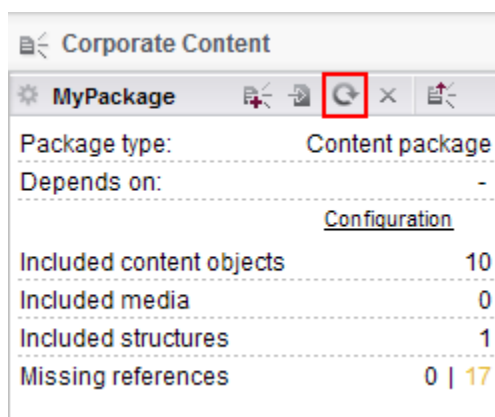

FirstSpirit Corporate Content: Refresh package display


This may be necessary e.g. if an element contained within the package was afterwards modified to include a reference.

For further information, see Module documentation for “FirstSpirit CorporateContent”, chapter “Corporate Content (package store)”.

47.8 Removal of write permissions in subscribing projects ("Changeable") 5.2R15

For packages, it is possible to specify whether they should be “changeable” or not in the dialogs “Create package” and “Edit package properties”:




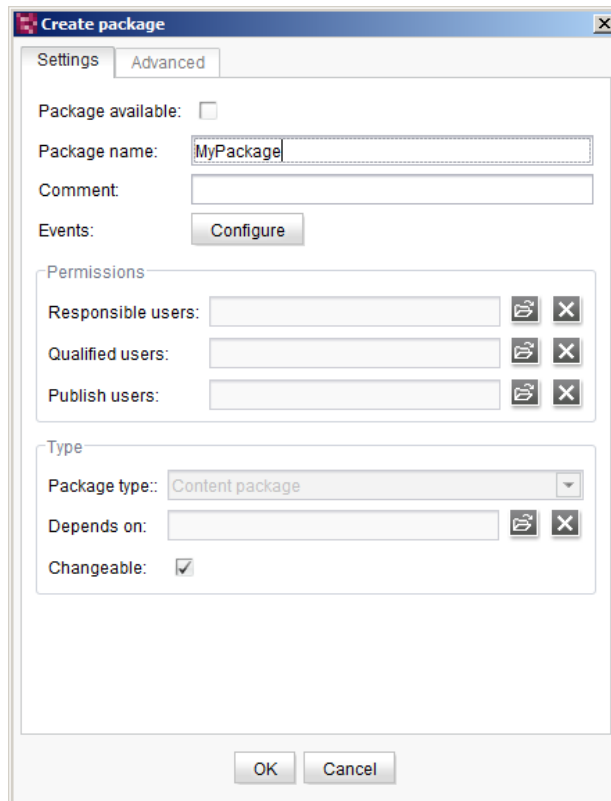


If the checkbox “Changeable” is checked, the target projects are granted write permissions on the imported objects. If the checkbox is not checked, the imported objects may be viewed and used in the target projects, but they cannot be modified.

If the checkbox' checkmark is removed in the **master (or source) project** (removing write permissions), this setting must be carried over manually into the subscribing projects. In order to more quickly identify the affected projects, these will now be displayed in a dialog when deactivating the option in the master project:



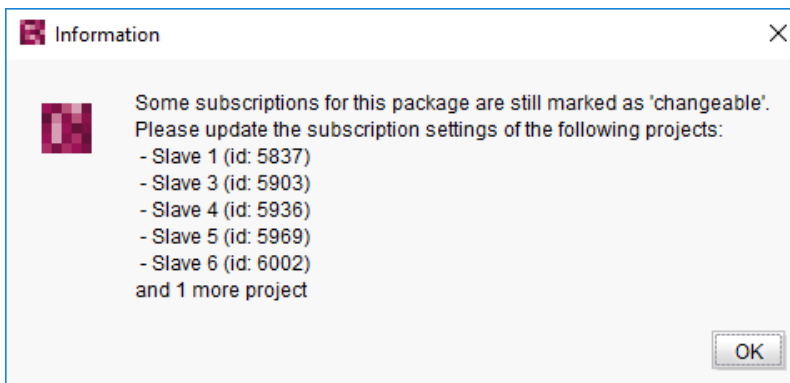

In this case, the checkbox “Changeable” is now deactivated in the subscribing projects, i.e. the checkbox' checked state cannot be modified:

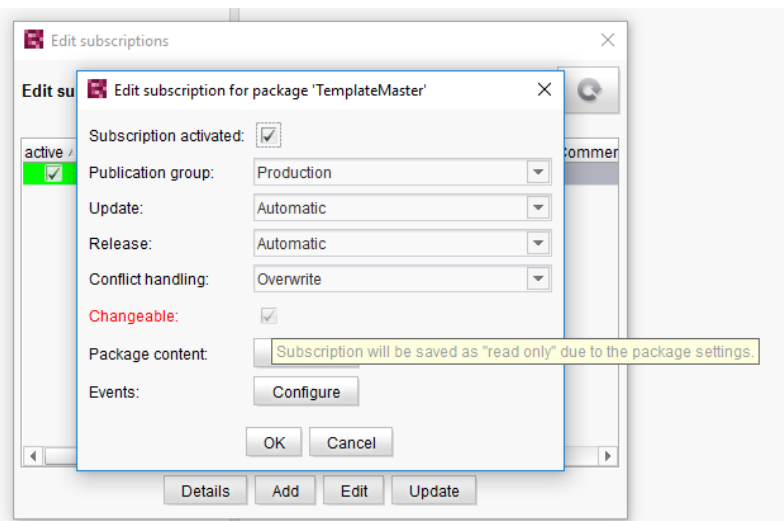

The tooltip associated with the checkbox indicates that the currently stored setting (package is changeable) does not comply with the package setting in the master project (package is not changeable); this may be confirmed by closing the dialog via “OK”, thereby storing the package subscription as not changeable. The package's objects can then no longer be edited in the target project.

For further information, see Module documentation for “FirstSpirit CorporateContent”, chapters

- “Creating a package – Settings tab”
- “Creating a subscription for a package”



48 Modules: Corporate Media


48.1 Limiting selections from remote projects to objects with a release state 5.2R4

The functionality “FirstSpirit Corporate Media” enables access of elements between different projects on the same FirstSpirit server. In particular, a project (a “target project”) may reference elements stored in another project (a “remote project”), such that objects (e.g. media) that are stored in a central project may be used in many different projects. In this case, the target projects only reference the objects, which remain stored in the remote project.

Referencing objects in remote projects is primarily carried out using the input component FS_REFERENCE. Here, the type of the referenced object is irrelevant: references can be made to media (images and files), page references (Site Structure store), as well as to elements of any other store, including folders. In general, the selection dialog always shows selectable objects in their current state. When a project is generated, only the release states of objects will be included in generation.

From FirstSpirit version 5.2R4, the remote project configuration can be set to only allow selection of objects that have been released at some time. This setting can be configured in FirstSpirit Server-Manager, “Project properties / Remote projects”.



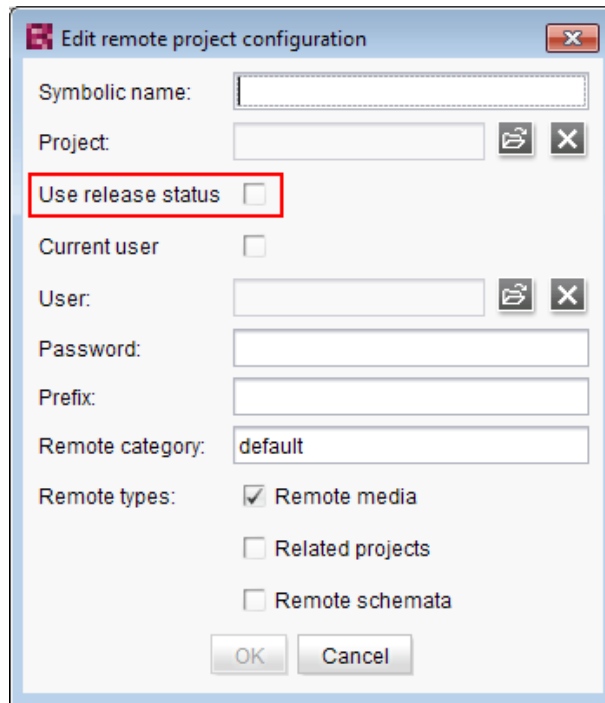

If the option “Use release state” is **activated**, the selection dialog will only show objects which have been released at least once. If such an object has been modified after the most recent release, the selection dialog and the preview will show the object in its current state, generation will, however, use the data of the object's most recent release state.

If the option is **deactivated**, the selection dialog will also show objects which have never been released. During generation, this may lead to invalid references and error messages in the generation log that will indicate such invalid references. Using the parameter `autoReleaseAfterUpload` in association with `upload`, media, which are uploaded via the input component `FS_REFERENCE`, can automatically be released, e.g.

```
<FS_REFERENCE name="st_reference" upload="yes">
  <LANGINFOS>
    <LANGINFO lang="*" label="Remote project"/>
  </LANGINFOS>
  <PROJECTS>
    <REMOTE name="remote" autoReleaseAfterUpload="yes"/>
  </PROJECTS>
</FS_REFERENCE>
```

For further information, see



- *FirstSpirit Manual for Administrators*, chapter “Remote projects”
- *FirstSpirit Online Documentation*, “Template development / Forms / Input components / REFERENCE”
- *Documentation for FirstSpirit Corporate Media*
- *Documentation for FirstSpirit SiteArchitect*, chapter “Reference selection (FS_REFERENCE)”
- *FirstSpirit Manual for Editors (ContentCreator)*, “Editing the preview page / Standard input elements / Reference selection (FS_REFERENCE)”


48.2 Specifying URL creation method for remote projects 5.2R10

FirstSpirit enables access from one project (called “target”, “master”, or “local project”) to other projects (called “remote projects”) which are present on the same FirstSpirit server. This allows objects (e.g. media) which are managed in a centralized project to be used in various projects. In the target projects, such objects are only referenced and remain stored in the remote project.

Previously, if some other method of path generation (“URL creator”) than “Default URLs” should be used for the remote project, this had to be carried out via a script or a module. If a URL creator was not explicitly set for a remote project via script or module, the URL creator “Default URLs” was used implicitly.

As of the current FirstSpirit version, it is now possible to specify the desired URL creator for a remote project in the remote configuration settings of the master project in ServerManager, using the option “Path generation” (“ServerManager / Project properties / Remote projects / Add” or “Edit”):



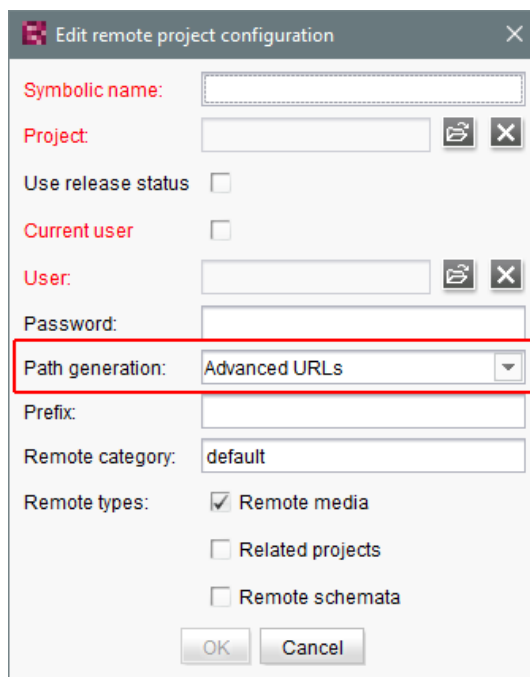


This option's combo box includes a list of all available URL creators. If the selected entry is “Advanced URLs”, references from the master project to this remote project will be generated using this URL creation method.

By default, the method “Default URLs” will be used. If a different URL creator was already selected for a remote project prior to an update to the current FirstSpirit version, this selection will be preserved and accordingly displayed in the combo box.

Within the scope of this feature, the validation behavior of this dialog was also optimized: if not all mandatory fields contain values, the button “OK” is inactive, preventing saving the configuration. Missing values will be indicated by red type. The display “Not available” indicates that the selected URL creator is not available on the server, and the name of the missing URL creator is displayed as well; this may occur if the module providing this URL creator has been uninstalled.

The selected URL creator will also be displayed in the overview “Remote projects” (project properties):



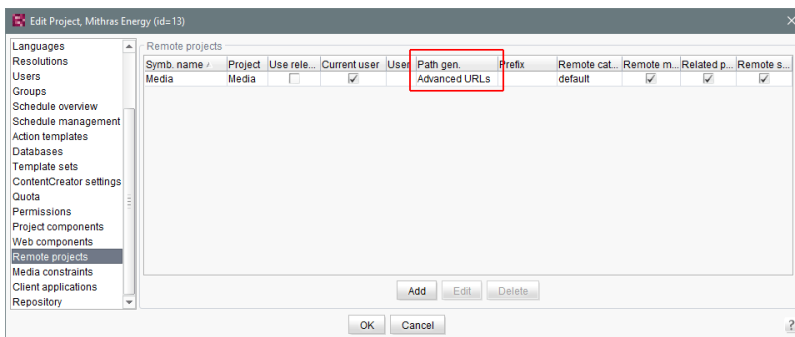

For further information, see

- *FirstSpirit Manual for Administrators*,
 - chapter “Remote projects”
 - chapter “Execute generation”
- *FirstSpirit Online Documentation*,
 - “Advanced topics / Remote access”
 - “Advanced topics / Generation”
- Module documentation for “FirstSpirit CorporateMedia”

49 Modules: FOP

49.1 Specify Standard Image Resolution 5.2R4

Apache FOP (“Formatting Objects Processor”) allows output of FirstSpirit content in PDF format. The support for Apache FOP in FirstSpirit is realized via a module: *fs-fop.fsm*.

Some image manipulation programs (e.g. Adobe Photoshop) do not specify “dpi” (dots per inch) settings in image files and potentially save files at a resolution of 96 dpi. By default, Apache FOP assumes a resolution of 72 dpi if the image file does not contain explicit resolution information (see also: <http://xmlgraphics.apache.org/fop/0.95/embedding.html>). This discrepancy can cause undesired rescaling of images which do not contain resolution information such that these images appear blurry.


As of FirstSpirit version 5.2R4, the structure variable (“Site Structure store / Menu level / Variables”)



```
fs_fop_source_resolution
```

specifies the default image resolution for Apache FOP:

- If the variable is not explicitly set, an image resolution of 72 dpi will be used.
- In order to explicitly set a different default resolution (e.g. 96 dpi), the desired menu level must contain a variable, named as shown above, with the desired value, e.g.

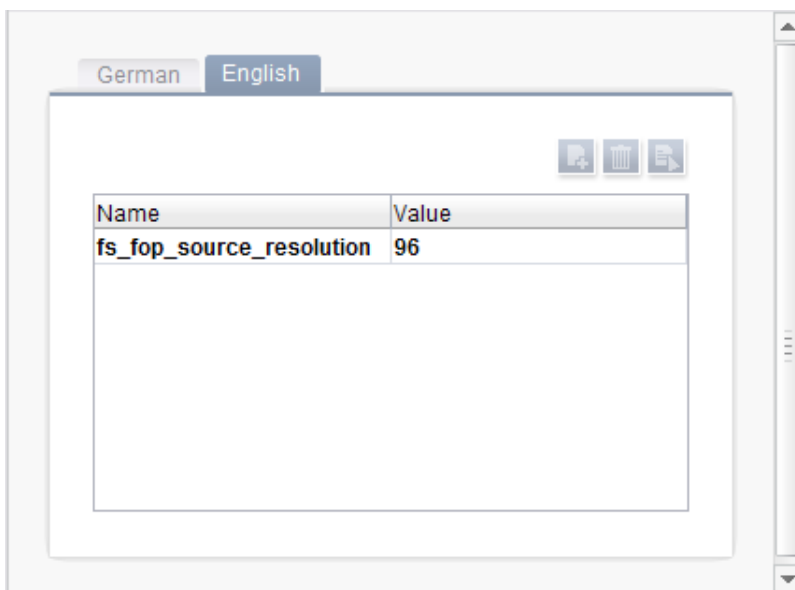

For further information about the definition and evaluation of structure variables, see *FirstSpirit Online Documentation*, "Template development / Variables / Definition and output / in menu levels".

50 Modules: OfficeConnect

50.1 Pasting as plain text with Ctrl+Shift+V 5.2R11

When using the FirstSpirit module "OfficeConnect", contents from the clipboard can now be pasted as plain text - without formatting, links, images, etc. - via the keyboard shortcut **Ctrl + Shift + V**. The ruleset selection dialog will not be shown; the text will be pasted directly at the desired position in the DOM editor.

In this context, the error message "No compatible format found in clipboard!" which was previously displayed when using **Ctrl + Shift + V** has been removed.



For further information, see Module documentation for *FirstSpirit OfficeConnect*.

51 Modules: Security

51.1 Improved Problem Recognition When Accessing an Access Control Database 5.2R20

When publishing via the FirstSpirit publication servlet (module: “FirstSpirit Security”), an error message is now output if the target side attempts to communicate with an unusable access control database. (This error may appear after conversion of the access control database to the Berkeley DB 7 format, for example.) Use of this change requires an update of the module “FirstSpirit Security” in the web application on the target side.

52 Repository

52.1 Berkeley DB 7: Optimizations 5.2R20

Berkeley DB 7 now checks for sufficient available storage space. By default, if available storage space is below a threshold of 512 MebiBytes (approx. 536 MB), further write operations in the Berkeley database are no longer possible. Error message:

```
Disk usage is not within je.maxDisk or je.freeDisk limits and write operations  
are prohibited.
```

Note: The storage space Berkeley DB 7 checks for is independent of the setting for monitoring of available storage space which may be configured via FirstSpirit ServerManager (“Server / Properties / Global server properties / Directories for disk space check”).

For further information, see *FirstSpirit Manual for Administrators*, “FirstSpirit ServerManager / Project properties / Repository”.


52.2 Faster migration from Oracle Berkeley DB 3 to 5 5.2R16

FirstSpirit is using Oracle Berkeley DB version 3 and 5 to hold its content data. Both versions can be used simultaneously on the same FirstSpirit server, in different projects. A migration from one version to



the other can be triggered through a drop down list (option “Backend” in the FirstSpirit ServerManager under “Project properties – Repository”).

Previously data conversion could, depending on the size of the project, potentially take several hours. In the current FirstSpirit version conversions from version 3 to version 5 can be performed faster. The new conversion method is activated via the checkbox “Use fast-path repository conversion if possible”:

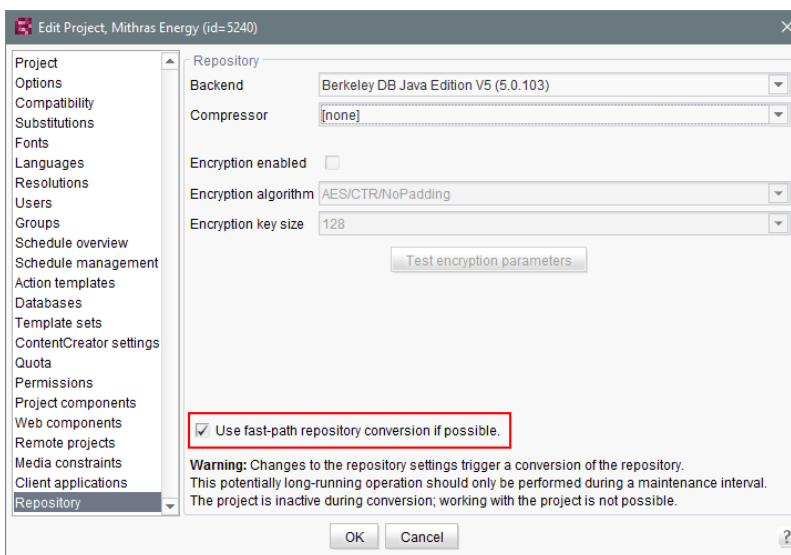

The checkbox is active by default. Faster conversions are only possible when the conversion path is Berkeley Version 3 to 5 and none of the other options in the panel (compression, encryption) are changed.


For further information see *FirstSpirit Manual for Administrators*, Chapter “FirstSpirit ServerManager / Project properties / Repository”.

52.3 Oracle Berkeley DB 7 (EAP) 5.2R18

Oracle Berkeley DB is used as standard in FirstSpirit as a repository for saving content data, until now, in versions 3 and 5. In order to benefit from performance advantages, to remain at the forefront of technical development, and last but not least, for security reasons, plans are in place to update the internal Berkeley DB to version 7 in the near future. For more information please see also Chapter “Oracle Berkeley DB 7”.

Individual project repositories can be converted to version 7 as of the current FirstSpirit version. The related function can be found in FirstSpirit ServerManager under “Project properties – Repository”, option “Backend”:



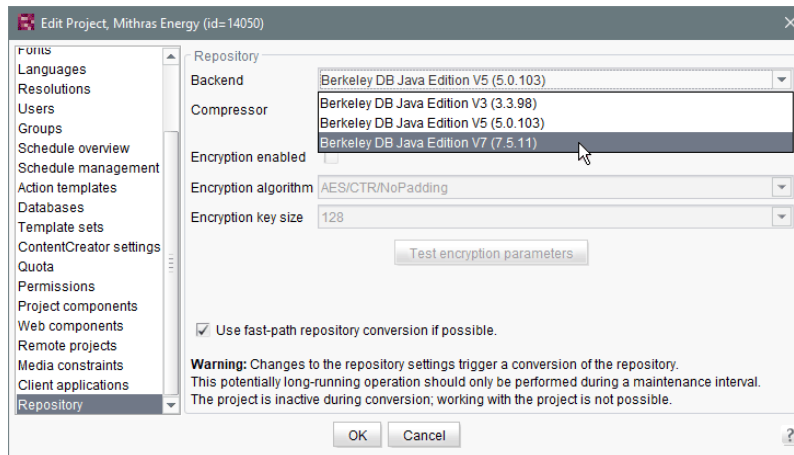

This function can be used to gather experience on the conversion process and is currently in beta test stage. Should problems unexpectedly be encountered when using Berkeley 7, these should be reported to e-Spirit immediately to enable them to be resolved before the official release of Berkeley 7. Using Berkeley 7 requires at least Oracle Java 8.

Version 5 is the default for new and imported projects. It is planned for the medium-term only to support Oracle Berkeley DB 7.

- Migration **from version 5 to version 7** generally takes just a few seconds if the option “Use fast-path repository conversion if possible” has been activated.
- When switching **from version 3 to version 7**, converting to version 5 first is recommended, with activated “Use fast-path repository conversion if possible” option, too. A direct switch from 3 to 7 can be completed; however, accelerated conversion is then not possible (“Use fast-path repository conversion if possible” option).
- **Conversion back** to an older Berkeley version is also possible but takes much longer and requires additional disk space.

When the user confirms the selection with “OK”, the system starts to convert the data using the desired settings. The relevant project is deactivated during the process.

To prevent any data loss, anyone using the project should log off first. Changes to the repository settings can take some time and should only be performed during a maintenance interval. We recommend you create a data backup before starting a repository conversion. Use of the new Berkeley version 7 was subject to extensive systematic quality assurance checks; however, as this is a significant version



upgrade and it concerns a third-party product, this version should be tried out on a test system before being launched on production systems.

Berkeley version 7 is, like the other Berkeley DB variants, implemented in form of a system module: `fs-berkeleydb7.fsm`.

For more information please see Chapter “Oracle Berkeley DB 7” and *FirstSpirit Manual for Administrators*, Chapter “FirstSpirit ServerManager / Project properties/ Repository”.

53 Search

53.1 Controlling indexing of referenced datasets 5.2R12

When creating, editing, or deleting FirstSpirit elements (e.g. pages, sections, media), the contents and data of such elements are written into or removed from the index, respectively, so that elements can be found more quickly using search functionality. This indexing process also includes referenced elements. The number of references that have to be considered influences the duration of an indexing process. Especially datasets that reference further datasets in other tables can cause indexing of all referenced elements to run long due to the resulting complex data structures. Until now, the parameter `indexing.maxNoOfAssociations` (configuration file `fs-server.conf`) could be used to limit indexing of referencing datasets: when a defined limit of indexed elements was reached, indexing was aborted, and further elements were not written into the index. As of the current version of FirstSpirit, this parameter will no longer be evaluated and has been replaced with a new parameter, `indexing.relationshipPathLengthToFollow`, which allows better control of indexing.


As of the current FirstSpirit version, indexing of datasets that are referenced via

- `FS_DATASET`
- `FS_INDEX` (used for dataset selection via `DatasetDataAccessPlugin`)
- `FS_LIST` (type `DATABASE`)

may be configured such that the path length will be considered. For a dataset which references other datasets, this controls whether the contents of only this “origin” dataset should be indexed or the contents of this dataset and of the datasets it references should be indexed. If contents of referenced datasets should be indexed as well, the parameter allows specification of the path length to which references



should be considered. For example, a path length 2 means that, in addition to the contents of the “origin” dataset, the contents of datasets referenced by this “origin” dataset as well as the contents of datasets referenced by these datasets will be indexed:

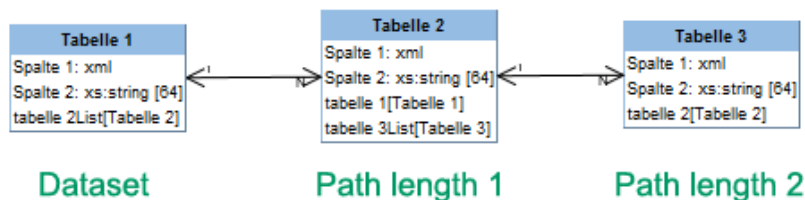

The path length can be set for the input components mentioned above via the parameter `indexing.relationshipPathLengthToFollow` in the configuration file `fs-server.conf`. By default, a path length “1” is assumed such that, for the input components mentioned above, datasets and the datasets they immediately reference are indexed. If no referenced datasets should be indexed, the parameter's value must be set to “0”, e.g.

```
indexing.relationshipPathLengthToFollow=0
```

Other path lengths may be specified by setting the desired value. This configuration is applied server-wide for all projects.

! Datasets which are stored in the same table will not be indexed.

! The indexing behavior illustrated here only applies to the input components mentioned above. For other input components which may reference datasets via `CMS_INCLUDE_OPTIONS`, contents of referenced datasets will not be indexed, but the ID of the referenced dataset, the label (tag LABELS), and the key (tag KEY) will be added to the index.

The indexing behavior illustrated here also applies to referenced datasets in pages and sections. The page or section in which the dataset-referencing input component is located is considered to be path length “0”. With `indexing.relationshipPathLengthToFollow=0`, only the contents of the page or the section would be indexed. In order to also index contents of the referenced dataset, `indexing.relationshipPathLengthToFollow` must be set to a value of “1”.



On a project/component level, the parameter `indexTreatment` may be used to manually extend the path length specified by `indexing.relationshipPathLengthToFollow` across certain tables, thereby practically increasing the value of the parameter `indexing.relationshipPathLengthToFollow` for individual input components. If `indexTreatment="follow"` is set, datasets which are referenced by the input component in question will be indexed along with the origin dataset. If the parameter is not set, `indexTreatment="default"` is assumed, and referenced datasets will be indexed according to the configuration of `indexing.relationshipPathLengthToFollow`. The parameter `indexTreatment` can thus only be used to extend indexing to a longer path length, but not to limit indexing.

If the path length should be extended via `indexTreatment="follow"` across several tables, `indexTreatment="follow"` must be set for the relevant input component in each table along the desired path. If `indexTreatment="follow"` is not set in a table template (this corresponds to `indexTreatment="default"`), indexing will stop.

! Contents in input components for which the parameter `searchRelevancy="none"` is set will not be indexed, regardless of the configuration of `indexing.relationshipPathLengthToFollow` and/or `indexTreatment`.

! Because the new parameters `indexing.relationshipPathLengthToFollow` and `indexTreatment` allow for more precise configuration of the indexing behavior for referenced datasets, the parameter `indexing.maxNoOfAssociations` will no longer be evaluated as of the current FirstSpirit version. In existing configurations, `indexing.maxNoOfAssociations` must be replaced with the new parameters in a suitable fashion. If `indexing.maxNoOfAssociations` was set to "0" or "1" in existing projects, `indexing.relationshipPathLengthToFollow` should be set to "0" after an update to the current version of FirstSpirit in order to ensure comparable behavior. Regardless of setting these new parameters, the set of search results may be different between the current FirstSpirit version and previous FirstSpirit versions, depending on the database schema.

Setting or modifying these parameters in retrospect will not have automatic effects on search results; the different indexing behavior will only be shown after modifying respective content. Alternatively, it is possible to reindex the entire project or parts of a project via a schedule task or the API. Such a reindexing process creates higher CPU and memory loads, however, and should only be carried out during a maintenance period!



In the context of these changes, the FirstSpirit API was extended. Use of the API is only relevant for development of project-specific input components.

The interface `ValueIndexer` (FirstSpirit Developer API, package `de.espirit.firstspirit.access.editor`) was extended with the following methods:

- *appendFormData(FormData formData, Language language, boolean followAssociations)*: This method is used to add content of form data (provided by the `formData` object) for a given language (`language` object) to the index. If `followAssociations` is set to *true*, dataset references contained in the form data will be followed.
- *appendAssociate(Associate associate, Language language, boolean followAssociations)*: This method allows adding data of an associated element in the given language to the index. If `followAssociations` is set to *true*, dataset references will be followed. If the method *associate(Entity)* is used, the method *appendAssociate()* will not have any effect if it is used for the same element.

Furthermore, the following interfaces were added to the package `de.espirit.firstspirit.access.editor`:

- `Associate`: Offers an abstract description of associated elements which may be referenced from form data.
- `GomIndexTreatment`: Provides the parameter `indexTreatment` for customer-specific input components.

For further information, see

- *FirstSpirit Manual for Administrators*, “FirstSpirit Server configuration / Configuration files (FirstSpirit Server) / FirstSpirit Server configuration (fs-server.conf) / Server”, parameter `indexing.relationshipPathLengthToFollow`
- *FirstSpirit Online Documentation*, parameter `indexTreatment` for input components at “Template development / Forms / Input components”
- *FirstSpirit Online Documentation*, “Plug-In Development / Universal Extensions / Input Components / GOM Form Element”



53.2 Project-specific configuration of indexing for referenced datasets

5.2R15

When creating, editing, or deleting FirstSpirit elements (e.g. pages, sections, media), the contents and data of such elements are written into or removed from the index, respectively, so that elements can be found more quickly using search functionality. This indexing process also includes referenced elements. The number of references that have to be considered influences the duration of an indexing process. Especially datasets that reference further datasets in other tables can cause indexing of all referenced elements to run long due to the resulting complex data structures.

For this reason, it is possible to limit indexing of referencing datasets.

Already available (server-wide configuration): The path length for indexing of referencing datasets may be limited server-wide using the parameter `indexing.relationshipPathLengthToFollow` (specified in the configuration file `fs-server.conf`). This setting applies to indexing of datasets that are referenced via

- FS_DATASET
- FS_INDEX (used for dataset selection via `DatasetDataAccessPlugin`)
- FS_LIST (type DATABASE)

By default, a path length “1” is assumed such that, for the input components mentioned above, datasets and the datasets they immediately reference are indexed. If no referenced datasets should be indexed, the parameter's value must be set to “0”, e.g.

```
indexing.relationshipPathLengthToFollow=0
```

Other path lengths may be specified by setting the desired value. This configuration is applied server-wide for all projects.

Newly available (project-specific configuration): As of the current version of FirstSpirit, it is now possible to overwrite the parameter `indexing.relationshipPathLengthToFollow` on a project-specific level using the new interface `SearchIndexAgent` (package `de.espirit.firstspirit.agency`, FirstSpirit Developer API).



The iteration depth may now be adjusted, e.g. via script:

```
import de.espirit.firstspirit.agency.SearchIndexAgent;  
sia = context.requestSpecialist(SearchIndexAgent.TYPE);  
sia.setPathLengthToFollow(2);
```


If there is no project-specific configuration set, the server-side parameter will be evaluated.

53.3 Weighting of Contents in Input Components 5.2R3

Weighting of content in search results may be specified per input component using the attribute `searchRelevancy` within the GOM XML tag of an input component (SiteArchitect: global search, search in data sources | ContentCreator: search in report area). For example, using this parameter, template developers may specify that elements which contain a search term in a headline input component should be displayed more prominently in search results than elements which only contain the search term in a body text input component. Additionally, individual input components may be configured so that their contents be ignored during indexing, which may increase indexing performance.


Input components may be configured with the following attributes in order to specify how their contents are handled during indexing:

- `searchRelevancy="none"`: The content of an input component that is configured with this search relevancy value **will not be indexed**. Pages, sections, and datasets which contain input components configured with this search relevancy value will not appear in search results if the search term only appears in the contents of these non-indexed input components. Searching for contents of such input components using drag-and-drop will yield no results (message “The field is not eligible for search, as it is marked non-relevant for searching.”). In data sources, such fields are also marked accordingly in the Simple Search user interface (“Not eligible for searching.”):

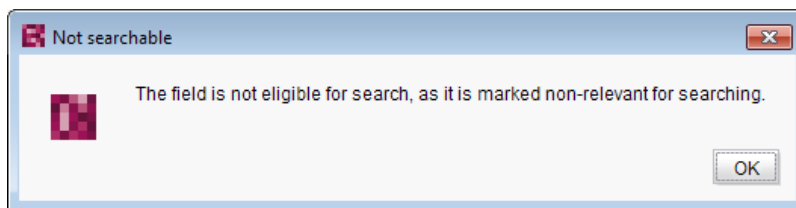

and



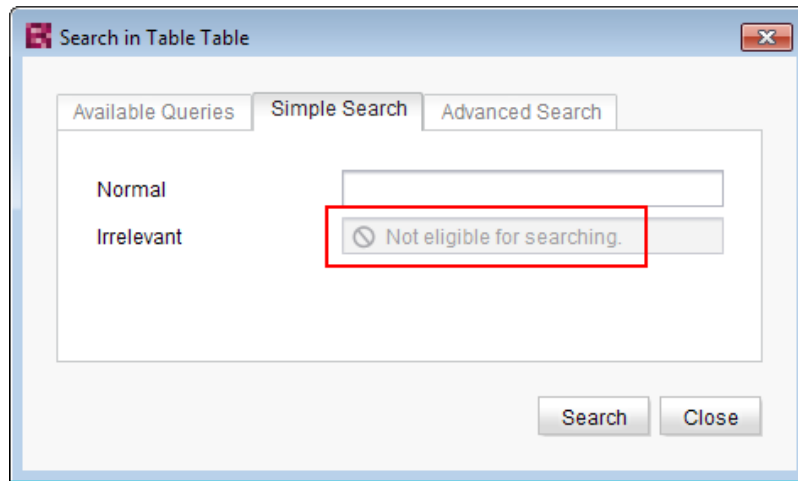

- `searchRelevancy="default"`: The input component's content **will be indexed with default weight**. This is the standard setting for input components.
- `searchRelevancy="high"`: The content of an input component which is configured with this search relevancy value **will be indexed with a higher weight** and thus displayed more prominently in search results (exception: search for datasets). This means that if a search term appears in both an element with an input component configured for high search relevancy and an element with an input component configured for default search relevancy, the element which contains the search term in a high-relevancy input component will be shown in a higher position in search results.

If the attribute is not specified for an input component, the component's content will be indexed with a default weight (`searchRelevancy="default"`).

For nested input components (FS_CATALOG, FS_INDEX, FS_LIST, CMS_INPUT_IMAGE_MAP, CMS_INPUT_LINK--also CMS_INPUT_DOM and CMS_INPUT_DOMTABLE with one restriction, see below), input components of inner entries (which are based on other templates) will be indexed as follows:

| computed searchRelevancy of input component of inner entry | | searchRelevancy input component in template of inner entry | | |
|--|---------|---|---------|------|
| | | High | Default | None |
| searchRelevancy outer input component | High | High | High | None |
| | Default | High | Default | None |
| | None | None | None | None |



- **Outer input component is configured with `searchRelevancy="none"`:**
 - **Inner entries will not be indexed** regardless of the `searchRelevancy` settings of input components in the templates used for inner entries.

- **Outer input component is configured with `searchRelevancy="default"`:**
 - In inner entries, contents of input components with `searchRelevancy="none"` **will not be indexed.**

 - In inner entries, contents of input components with `searchRelevancy="default"` **will be indexed with normal weight.**

 - In inner entries, contents of input components with `searchRelevancy="high"` **will be indexed with higher weight.**

- **Outer input component is configured with `searchRelevancy="high"`:**
 - In inner entries, contents of input components with `searchRelevancy="none"` **will not be indexed.**

 - In inner entries, contents of input components with `searchRelevancy="default"` and `searchRelevancy="high"` **will be indexed with higher weight.**

In general, **links in values of input components `CMS_INPUT_DOM` and `CMS_INPUT_DOMTABLE`** are indexed according to the `searchRelevancy` settings associated with single input components in link forms. However, the link text of a link (the input component which is selected in the link template's "Link text" option) will be indexed with the weighting of the `CMS_INPUT_DOM` or `CMS_INPUT_DOMTABLE` component.

Note: "Header fields" of snippets (tab "Snippet" in templates) are also indexed. If an input component is configured with a weighting "none" (`searchRelevancy="none"`) but its value is included in the template's snippet header field, searching for the input component's value will cause the associated element to appear in search results.

Changing the weighting setting of an input component in a template does not immediately affect the indexed data of existing elements based upon that template, and search results will continue to reflect the old weighting until elements based upon that template are modified and saved (at which time they will be reindexed in the background). Alternatively, the entire project or parts thereof may be reindexed via a schedule task or the FirstSpirit APIs, which does not require elements to be changed. However,



reindexing large numbers of elements is memory and CPU-intensive and should only be performed during a planned maintenance period!

For further information, see

- *Documentation for FirstSpirit SiteArchitect*, chapter “The global search” etc.
- *FirstSpirit Manual for Editors (ContentCreator)*, chapter “Search function in the report area” etc.
- *FirstSpirit Manual for Administrators*, chapter “Rebuild search index”
- *FirstSpirit Developer API*, interface `GomSearchRelevancy`
(package `de.espirit.firstspirit.access.store.templatestore.gom`)
- *FirstSpirit Access API*, interface `SearchService`
(package `de.espirit.firstspirit.access.search`)
- *FirstSpirit Developer API*, interface `QueryAgent`
(package `de.espirit.firstspirit.agency`)

54 Security

54.1 Behavior of the HTTP header "X-Frame-Options" is now configurable for the FirstSpirit web applications fs5root and fs5webmon

5.2R12

Support for the HTTP header “X-Frame-Options”: The behavior of the HTTP header “X-Frame-Options” is now configurable for the FirstSpirit web applications `fs5root` (start page and SiteArchitect) and `fs5webmon` (ServerMonitoring). It can be controlled via the parameter `frameOptionsHeader` in the configuration file `fs-server.conf`:



```
#####  
# X-Frame-Options header to control frame embedding  
# of FirstSpirit fs5root or fs5webmon webapplication  
#####  
# X-Frame-Options header value  
# - DENY do not allow embedding in a frame  
# - SAMEORIGIN only allow embedding in a frame from a page of the same origin  
# - ALLOW_ALL do not limit embedding / do not set X-Frame-Options header  
frameOptionsHeader=SAMEORIGIN
```

Possible values:

- DENY prohibits embedding of the web applications into a frame
- SAMEORIGIN prohibits embedding of the web applications into a frame which is not located on the same host (default value)
- ALLOW_ALL allows embedding of the web applications into a frame

! The new parameter changes the previous default behavior. If embedding of the FirstSpirit web applications (or LiveEdit) into frames of another host should be allowed or if such embedding should generally be prohibited, the configuration parameter must now be set to the appropriate value.

54.2 Java Vulnerability (Serialization/Deserialization) 5.2R3

Java applications which use or include the Java libraries

- “Common Collections” (Apache)
- “Groovy”
- “Spring Framework”

may pose a potential security risk: a vulnerability in these libraries enables an attacker to execute code on a server without prior authentication. Further libraries affected by this vulnerability are currently not known.



The FirstSpirit core software itself is not affected by this security threat as it does not use any of the aforementioned libraries.

However, several FirstSpirit Modules used or use at least one of the affected libraries and thus may have been or may be used as vectors for malicious attacks against FirstSpirit.

Furthermore, third-party FirstSpirit Modules may be affected.

FirstSpirit version 5.2R3 includes a bugfix which provides extensive protection against known and unknown attacks which exploit this vulnerability. This fix also protects potentially vulnerable modules (server-side only!). An update to this FirstSpirit version increases the general security of FirstSpirit, e.g. when FirstSpirit is deployed in an unprotected environment.

Several of the aforementioned modules have already received specific bugfixes to protect against this vulnerability.

For further information, see the related posting in the [FirstSpirit-Community](#).

Please direct questions about this subject to e-Spirit Technical Support.

For further information about the vulnerability, see www.foxglovesecurity.com.

55 SiteArchitect / ContentCreator

55.1 Access to FS_INDEX value set 5.2R2

FS_INDEX input components save references to data objects (such as those from external web services) using identifiers in string format. These identifiers are provided by the data-access plug-in, which is assigned to the index component in the form definition of a template. To access the actual data in an index entry, the session object for the data-access plug-in must be queried in order to obtain and further process a suitable data object using a string identifier.

For access to the value set of an FS_INDEX input component within presentation channel definitions, an `IndexAccessor` object type is returned, which not only offers access to the saved string identifiers, but also provides a list of the data objects which are relevant to the identifiers and have been resolved by the data-access plug-in.

In FirstSpirit version 5.2R2 and higher, an `IndexAccessor` type object is also returned in snippet definitions in the case of access to the value set for an FS_INDEX input component.

For more information on:




- Working with FS_INDEX, see *FirstSpirit Online Documentation*, “Template development / Forms / Input components / INDEX”
- The IndexAccessor data type, see *FirstSpirit Online Documentation*, “Template development / Template syntax / Data types / IndexAccessor”
- The definition of snippets, see *FirstSpirit Online Documentation*, “Template development / Snippets”.

55.2 Different Validation Behavior for Different Languages 5.2R19

FirstSpirit SiteArchitect and ContentCreator notify the user of invalid content in input components. This invalid content may be due to infractions of rules that were specified by a template developer, an empty input component for which the attribute `allowEmpty="no"` is specified, or invalid references (such as use of a FirstSpirit object, e.g. a media element or a page reference, which has been deleted in the meantime). If an input component in the page, section, or dataset being edited is missing content or contains invalid content, it either cannot be saved (`scope="SAVE"`) and/or cannot be released (`scope="RELEASE"`), or a notification message specified by a template developer will be shown (`scope="INFO"`).

As of the current version of FirstSpirit, this validation may be deactivated for one or several project languages via the option “Validate language” found in the properties of the project in question (FirstSpirit ServerManager / project properties / page “Languages”):

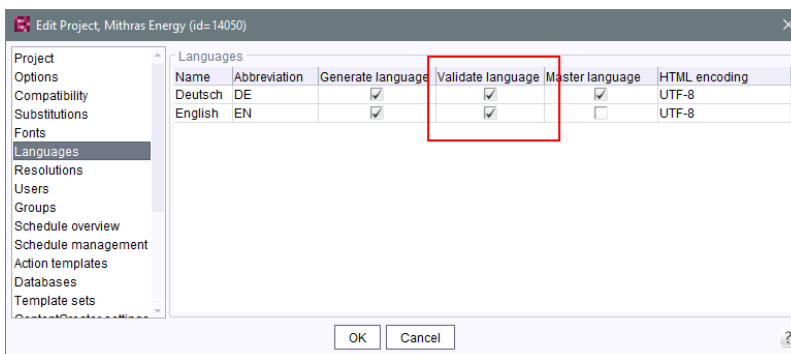

By default, the option is active for each project language, i.e. contents in that language will be validated in the associated project. If the option is deactivated for a language, contents in that language will no longer be validated. A page, section, or dataset can thus be saved and/or released although (valid)



content does not exist in every language. This enables implementation of different validation behaviors for different languages.

If the option is reactivated, contents that do not adhere to the rules must first be modified in order to release or save the element.

Using the API, this option may be activated or deactivated via the method `setIgnoreValidation()` of the interface `Language` (package `de.espirit.firstspirit.access`, FirstSpirit Access API).

Note: This change also introduces modifications to internal classes. This can result in problems when establishing connections if the FirstSpirit Server is running a version $\geq 5.2R19$ and another component (e.g., Tomcat web server) is still running a version $< 5.2R19$. In this case, the counterpart (in this case Tomcat with web apps) must be updated.

For further information, see

- *Documentation for FirstSpirit SiteArchitect*, “General operation / Invalid entries” and “FirstSpirit SiteArchitect / The menu bar / Search”
- *FirstSpirit Manual for Editors (ContentCreator)*, “Editing a preview page / Working with dialogs / Editing window / Rule violations”
- *FirstSpirit Manual for Administrators*, “FirstSpirit ServerManager / Project properties / Languages”
- *FirstSpirit Online Documentation*, “Template development / Rules”

55.3 Dynamic forms: New property "CONTAINERTYPE" 5.2R6

Input components may be used in multiple contexts: in sections, list components such as FS_CATALOG, datasets, and pages. As of the current FirstSpirit version, the property `CONTAINERTYPE` allows identification of the object type. Depending on the surrounding object type, the input component may, for example, be shown or hidden (or set to be read-only).

Towards this end, the expression `<PROPERTY source='#global' name='CONTAINERTYPE' />` may be used in the value determination block of a rule's definition (or for the definition of a precondition). It returns the identifier of the container type, where the return value matches the type's name (in uppercase letters). The following types are currently supported:



- FS_CATALOG
- FS_LIST
- CMS_INPUT_DOM
- CMS_INPUT_DOMTABLE
- CMS_INPUT_LINK
- CMS_INPUT_IMAGE_MAP
- BODY
- NONE

For further information, see *Template development / Rules / Form properties <PROPERTY/> / Property CONTAINERTYPE* (→*FirstSpirit Online Documentation*).

55.4 Optimized Search 5.2R18

During indexing for search, FirstSpirit historically did not add English-language “stop words” (short words which appear often in a language but seldomly indicate relevant information about the contents of a document) to the index, e.g.

- “a”
- “and”
- “are”
- “is”
- “the”
- “was”
- “with”



■ ...

For example, in the demo project “Mithras Energy”, a search for “the future” previously resulted in an empty search results list because the word “the” of that phrase was not in the search index. As of the current version of FirstSpirit, such stop words will no longer be handled specially but added to the search index as well; in the demo project “Mithras Energy”, a search for “the future” will now return the English-language start page of that project (text: “Solar energy is the energy of the future, ...”) as a search result.

Due to this change, the size of the search index of a project will increase slightly, and more search results will be shown accordingly.

This change will not have automatic effects on search results; the different indexing behavior will only be shown after modifying respective content, which causes the associated element to be reindexed individually. Thus, the words or character sequences listed above can be found during a search in existing FirstSpirit projects only once a given FirstSpirit element (page, section, dataset, etc.) was changed and saved. Alternatively, it is possible to reindex the entire project or parts of a project via a schedule task or the API. Such a reindexing process creates higher CPU and memory loads, however, and should only be carried out during a maintenance period.

55.5 Rebrush for FirstSpirit graphical user interfaces 5.2R19


As part of the revision of the design of the graphic user interface of FirstSpirit, which began in FirstSpirit version 5.2R17, improvements and further optimizations were made with the current FirstSpirit version. For example, the titles of input components (parameter `label`) are now displayed in capital letters in the SiteArchitect for better clarity in forms. If default values are defined for an input component, this is visualized by the addition of “(Default value)” in the title.

55.6 Reports: Handling has been improved 5.2.515, 5.2R6

In FirstSpirit, reports are an important and project-specifically customizable means of making content from any source available to editors in a project. Reports allow a structured display of data that can - depending upon a report's implementation - be searched, filtered, and used for editorial work (by way of drag-and-drop and buttons).

Actions that can be started using a button on reports in FirstSpirit SiteArchitect (e.g. starting a search) can now be easily triggered by pressing (1):



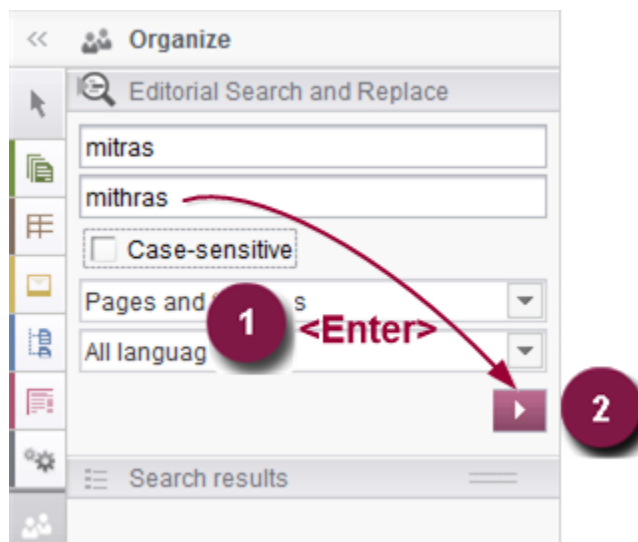

Furthermore, an arrow is used now for the button instead of the display name of the respective report (2).

For further information, see e.g. *Plug-In Development / Universal Extensions / Data Access / Use for Reporting* (→*FirstSpirit Online Documentation*).

Furthermore, user guidance has been improved when using customer specific reports in Content-Creator (interface `StaticItemsProviding`, package `de.espirit.firstspirit.client.plugin.dataaccess.aspects`, *FirstSpirit Developer API*).

55.7 Snippets: Outputting Metadata 5.2R18

Contents from metadata which are defined explicitly on a given element may now be output in snippet definitions using the new system object `#meta`. This object is available when metadata are defined on the element for which the snippet is being generated. Output of individual input components from metadata is done via

```
#meta.IDENTIFIER
```

For further information, see *FirstSpirit Online Documentation*, “*Template development / Template syntax / System objects / #meta*”.



Also, in the course of this work, an error was remediated: when metadata were output via API, it was possible that the language-dependent preset value was mistakenly output instead of the language-independent fallback value.

56 SiteArchitect / ServerManager

56.1 Client Logging 5.2R7

Logging enables FirstSpirit developers and administrators to identify and correct issues. It happens at various places of FirstSpirit, e.g. log messages for actions on the server will be stored in the file `fs-server.log`, log messages for schedules in the file `fs-schedule.*.log` et cetera.

As of the current FirstSpirit version, log messages of SiteArchitect and ServerManager will be stored separately for each started client in a file in the user home directory of the respective user's client workstation in addition to the file `fs-clients.log` (in the directory `log` in the base directory of the FirstSpirit server, only used for exceptions).


- SiteArchitect: `.firstspirit*/logs/SiteArchitect*.log`
- ServerManager: `.firstspirit*/logs/ServerManager*.log`

The filename contains the client name (e.g. SiteArchitect or ServerManager) and a timestamp of the point of time when the client has been started, e.g.

```
SiteArchitect-2017-02-28T13-55-40.067.log
```


Log messages generated by SiteArchitect and ServerManager are therefore now better suited to be sent or uploaded. In order to indicate which log file belongs to which client, the menu “Help” can be used to identify it. The menu entry “Show log file in File Manager”





opens the local storage directory. The file with the current logging will be selected. The timestamp as part of the file name helps to identify the log messages of previously closed clients in the storage directory. Log files will be stored up to a total number of 100 files or until all files have reached a combined size of 100 MB. If one of those limits is reached, the oldest log files will be deleted one by one.

With the menu entry “View log” in the menu “Help” it is possible to display the current logging in a separate window:

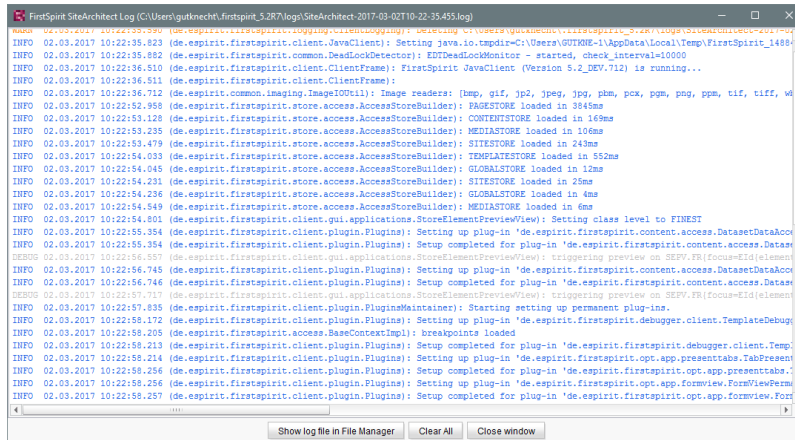

Log messages are displayed in different colors for each log level in order to improve clarity. By using the button “Clear All” it is possible to clear the log window. This does not affect the contents of the log file.

56.2 Configurable directory for log messages 5.2R10

Log messages of ServerManager and SiteArchitect will be stored separately for each started client. The storage location of the log messages on the user’s client workstation is now configurable. The directory can be configured using the parameter CLIENT_HOME_DIR or one of the operating-system specific



parameters (e. g. `CLIENT_HOME_DIR_WINDOWS`) in the file `fs-server.conf` or via the connection settings.

Order of evaluation:

- First, the operating-system specific path details are evaluated, which are set in the connection settings (e.g. `CLIENT_HOME_DIR_WINDOWS`).
- Then the path information set in the connection settings using the parameter `CLIENT_HOME_DIR` are evaluated.
- Then the operating system-specific path details defined in `fs-server.conf` are evaluated (e.g. `CLIENT_HOME_DIR_WINDOWS`).
- Then the path information set in the `fs-server.conf` file using the parameter `CLIENT_HOME_DIR` are evaluated.
- If the parameter is neither set in the connection settings nor in `fs-server.conf`, the operating system-specific user home directory is used by default.

The information, which can be set server-wide for all users using `fs-server.conf`, can therefore be overwritten on a user-specific basis.

If a directory is given to which the respective user does not have any access permissions, a corresponding exception is logged.

For more information please see also *FirstSpirit Manual for Administrators*, Chapter “Roll-out process (workstation computer)”.

56.3 Configuration of the FirstSpirit start page 5.2R19

There are now additional setting options for the FirstSpirit start page. Applications can be shown or hidden via groups / permissions on the start page. These settings include:


- Configuration of the start page: primary / secondary applications
- Configuration of the visibility of standard applications



- Connection settings: show standard applications (only visible for server administrators)
- Project specific configuration (restrictions) of permitted applications

ServerManager / Server properties / Start page

For further customization of the FirstSpirit start page, it is now possible to configure the primary and secondary applications on the start page in addition to configuring quick start entries.

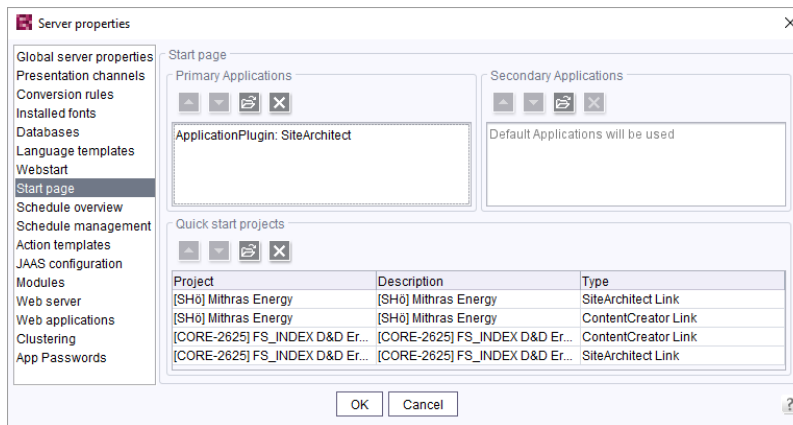

Primary Applications: Here you can configure the upper row with the large white icons for the area “Start applications” on the start page. If no application is selected for this row, the standard applications are displayed..


Secondary Applications: Here you can configure the lower row with the small black icons for the area “Start applications” on the start page. If no application is selected for this row, the standard applications are displayed.

The following applies to both areas: You can add your own applications. As soon as an application has been selected for the list, all (other) standard applications (if desired) must be listed individually.

ServerManager / Server properties / Modules

Via the module / component configuration the visibility of the standard applications for different groups can now be configured.



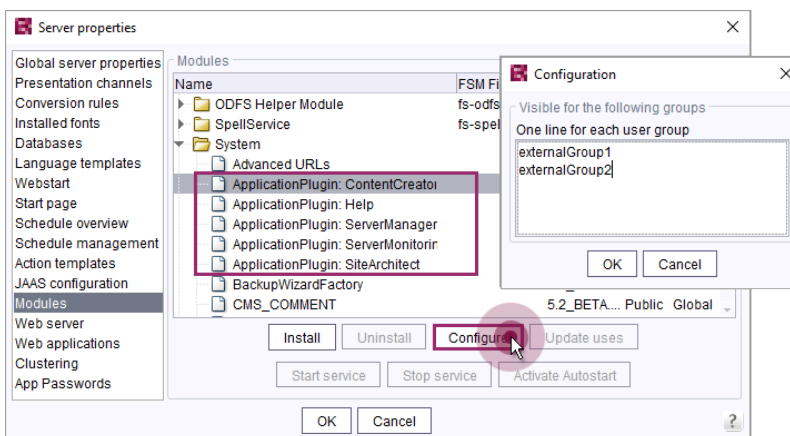

Here you can enter names of external groups whose users can see the applications. The names of the groups are to be defined like in the fs-server.conf properties "externalServerAdminGroup" and "externalLauncherGroup". If the group is empty, all users can see the corresponding application.

For more information on “External groups”, confer to *FirstSpirit Manual for Administrators*, “FirstSpirit ServerManager / Project properties / Groups”.

Connection Settings

For the server administrator, an additional option has been added to the connection settings..

CONNECTION SETTINGS

Use FirstSpirit Launcher

Show default applications

Use settings

Mode

Use HTTPS protocol

Host

This option is given to the server administrator for security purposes, if he/she has blocked himself/herself access due to an unfavourable configuration. If the **Show default applications** option is active, only the standard applications in the previous configuration of their visibility are displayed.


This option does not affect the configuration of the visibility of standard applications.

For example, the server administrator cannot see an application even when the option is active, if it was excluded from visibility by a group definition.



ServerManager / Project properties / Applications

The settings made in the server properties can be restricted by configuring the allowed applications in a project-specific way.

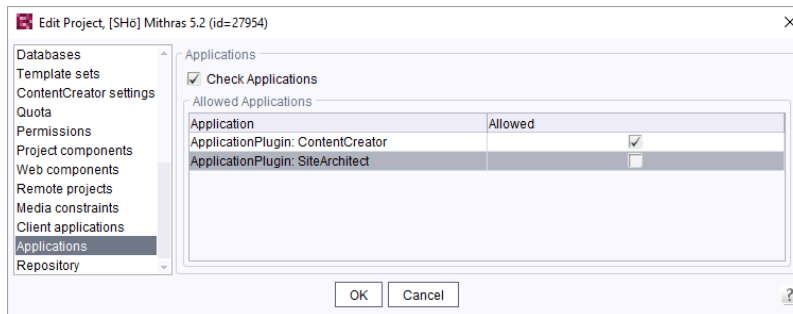


The configuration affects

- the project selection dialog;
- the quickstart entries;
- the list of recently opened projects.

56.4 Reconnecting after Communication Errors 5.2R5

If a communication error occurred between SiteArchitect or ServerManager and the FirstSpirit server, clients previously needed to be exited manually and restarted after communication with the server was reestablished.

As of FirstSpirit version 5.2R5, active client sessions will no longer be automatically ended in this case. If a communication error occurs, the following dialog will be displayed:

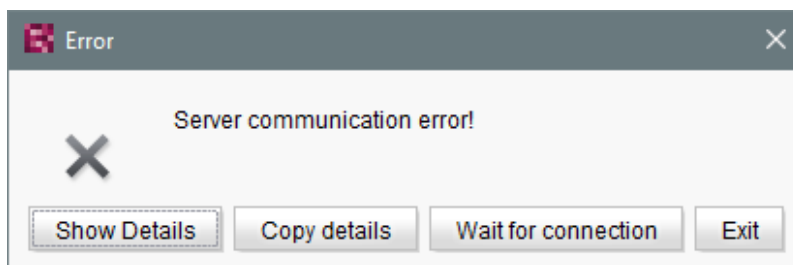


- Clicking “Exit” will close the client.
- Clicking “Wait for connection” will allow a user to continue to work with SiteArchitect or Server-Manager if the connection can be reestablished within 1 minute. The dialog will then close automatically.
- If the user does not click on either button, the message “Server connection re-established” will be displayed if the connection can be reestablished within 1 minute. Clicking on “OK” will close the dialog, and the user can continue to use the client.

If the connection cannot be reestablished within one minute, the message “Server connection closed” will be displayed, and the client must be closed by clicking “Exit”.

56.5 Speeding up file selection from directory structure of the client workstation 5.2.515, 5.2R6

The file selection dialog allows selection of a desired file from the directory structure of the client workstation for upload to FirstSpirit SiteArchitect (e.g. Media store) or ServerManager (e.g. project import).

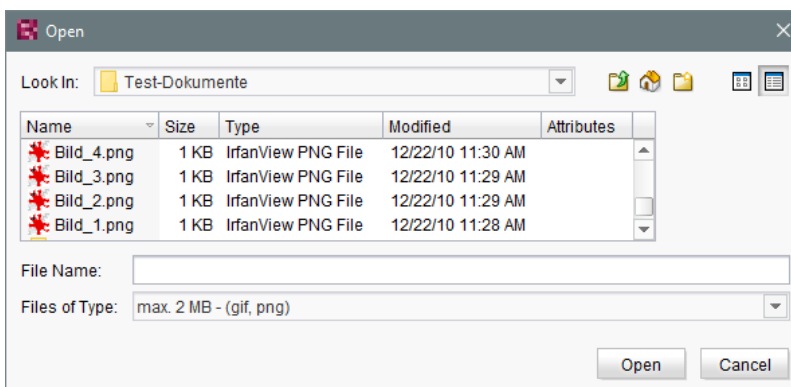

From the current FirstSpirit version onwards, the parameter

```
-DSynthetica.extendedFileChooser.sortEnabled=false
```

can be set in the connection or web start settings in order to deactivate the file selection dialog's sort functionality (column headers in the view mode “Details”). This can speed up work with the file selection



dialog when the user needs to navigate among different directories of the client workstation's file system. If this parameter is set, an according entry will be logged to the log file `fs-server.log`:

```
INFO 26.09.2016 16:13:08.923 (de.espirit.common.gui.LookAndFeelUtil): disabled
sorting in file chooser'
```

Alternatively, files can also be uploaded into the Media store of FirstSpirit SiteArchitect using

- drag-and-drop and
- the “Media Import Wizard” (“Extras” menu).

For further information, see

- *FirstSpirit Manual for Administrators*,
 - chapter “Configuring connection settings” (section “Optional parameters”)
 - chapter “Server properties / Start page”
- *Media Store / Creating media* (→*Documentation FirstSpirit SiteArchitect*)
- *Media Store / Media Import Wizard* (→*Documentation FirstSpirit SiteArchitect*)
- *General operation / Drag-and-drop functions* (→*Documentation FirstSpirit SiteArchitect*)


57 SiteArchitect

57.1 'Group exclusion' function for transitions in workflows 5.2R3

A workflow is a sequence of tasks that is completed according to a fixed, predefined structure. In FirstSpirit, this consists of statuses, activities, and transitions, whereby transitions form the link between activities and statuses. Due date deadlines and groups of authorized individuals can be defined in FirstSpirit for the respective tasks. Authorizations are defined for transitions.

The “Group exclusion” field for a transition (“Permissions” tab) is used to select groups which are not to be preselected as “Next editor” in the workflow dialog:




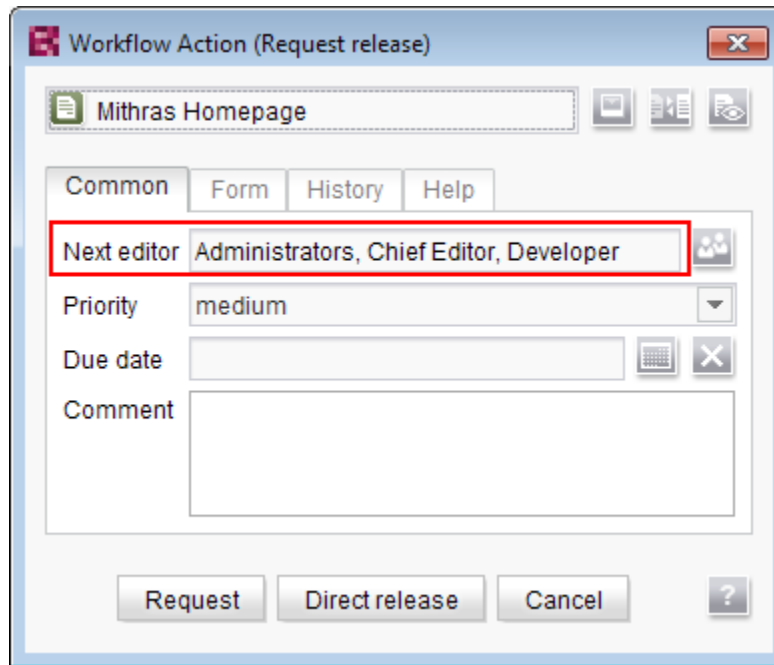


If the user does not explicitly select these groups in the workflow dialog, they will not receive an e-mail message either.

It is only possible to define such a group exclusion for transitions which indicate an activity. From FirstSpirit version 5.2R3 onward, this definition is now also prevented in the GUI for transitions which indicate a status:



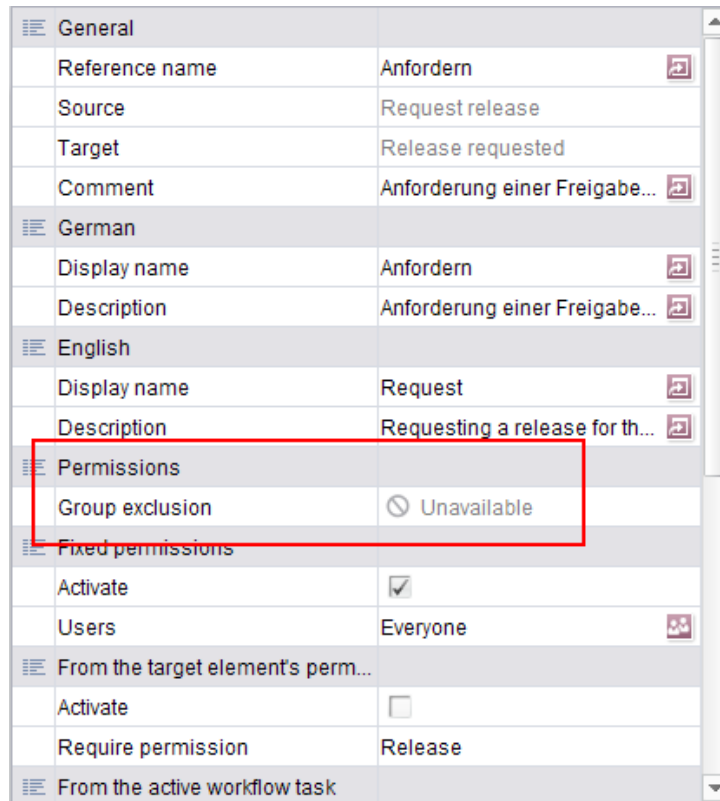


| | |
|-----------------------------------|---|
| General | |
| Reference name | Anfordern |
| Source | Request release |
| Target | Release requested |
| Comment | Anforderung einer Freigabe... |
| German | |
| Display name | Anfordern |
| Description | Anforderung einer Freigabe... |
| English | |
| Display name | Request |
| Description | Requesting a release for th... |
| Permissions | |
| Group exclusion |  Unavailable |
| Fixed permissions | |
| Activate | <input checked="" type="checkbox"/> |
| Users | Everyone |
| From the target element's perm... | |
| Activate | <input type="checkbox"/> |
| Require permission | Release |
| From the active workflow task | |

In the properties table

and




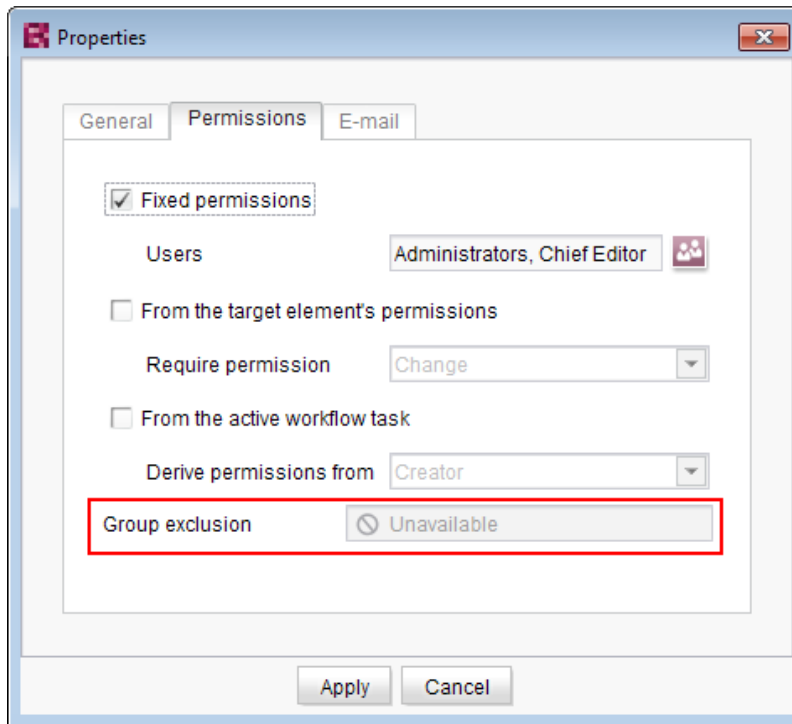

In the dialog

The group(s) that is/are not to appear automatically as “Next editor” in the workflow dialog must be specified for the transition which indicates the previous activity in the workflow:



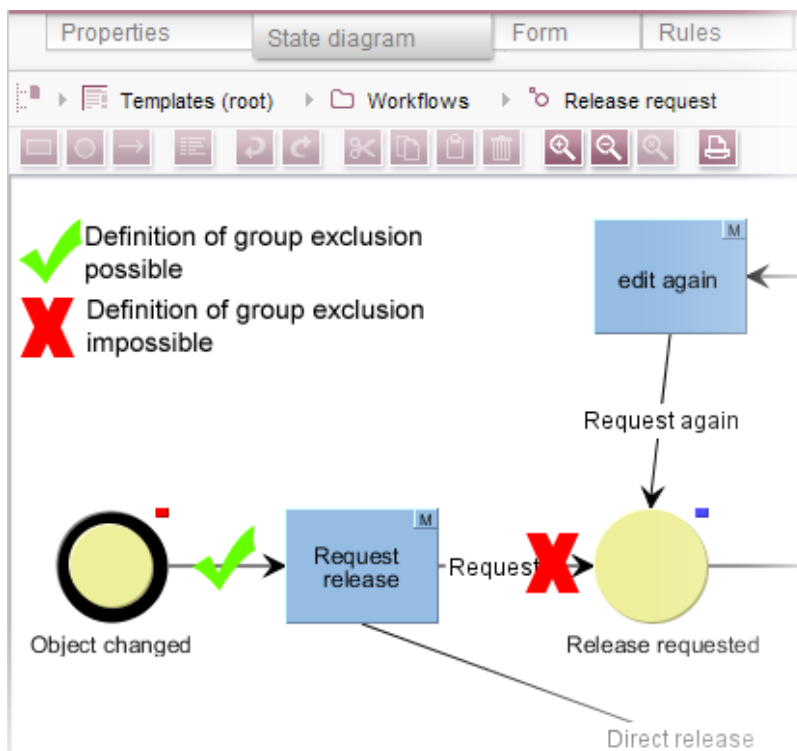

For more information, see also *FirstSpirit Online Documentation*, “Templates (basics) / Composition of templates / Workflows / State diagram tab / Properties of a transition”.

57.2 Code completion optimizations 5.2R7


Code completion is available on the “Form” and “Rules” tabs, as well as on the template set tabs. The `Ctrl + Space` key combination opens a window of the available tags, parameters, and, if applicable, values.

- On the “Form” tab, code completion can be used to insert input components together with their minimum configuration and all available parameters and associated values.
- On the “Rules” tab, all available tags and parameters can be shown and inserted, according to their hierarchy.
- On the template set tabs, all available instructions in their corresponding syntax, identifiers of input components defined on the “Form” tab, and methods can be inserted.



Some optimizations have been made to the “Form” and “Rules” tabs for the purpose of code completion in the latest FirstSpirit version:

Whereas in the past, the suggestions shown for tag and parameter names were **case-sensitive**, now case is irrelevant for code completion. For example, if the text `<fs` has already been entered on the “Form” tab, pressing `Ctrl + Space` will show the following suggestions:

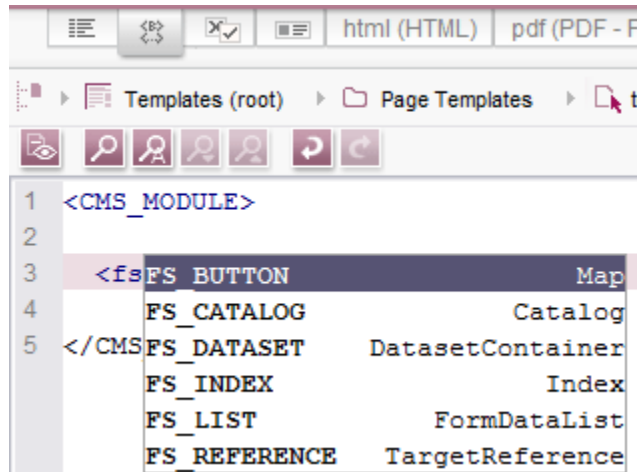

`<FS` must have been entered previously.

Instead of tags which code completion would close with `/>`, now open tags are generated, which make it easy to generate and work with internal tags.

Example **before 5.2R7**:

```
<FS_INDEX ...>
...
  <SOURCE name="" />
</FS_INDEX>
```

Example **with 5.2R7 or higher**:



```
<FS_INDEX ...>  
...  
  <SOURCE name="">  
  </SOURCE>  
</FS_INDEX>
```

Once saved, `<SOURCE name="..."> ... </SOURCE>` is truncated to `<SOURCE name="..." />` again.


Furthermore, code completion can now be used to finish the **closing tags** of an element too, if completion is required for such a tag (i.e., one that starts with `</`). The next superordinate opening tag is always closed during this process.

For more information, see *Advanced topics / Input assistance* (→*FirstSpirit Online Documentation*).

57.3 Configuring e-mail messaging in workflows 5.2R2

In FirstSpirit, lists of users and / or groups can be defined for activities and transitions in a workflow. Messages are then sent to these users and / or groups via e-mail when the corresponding workflow step is completed. The “List” field is used for this purpose:



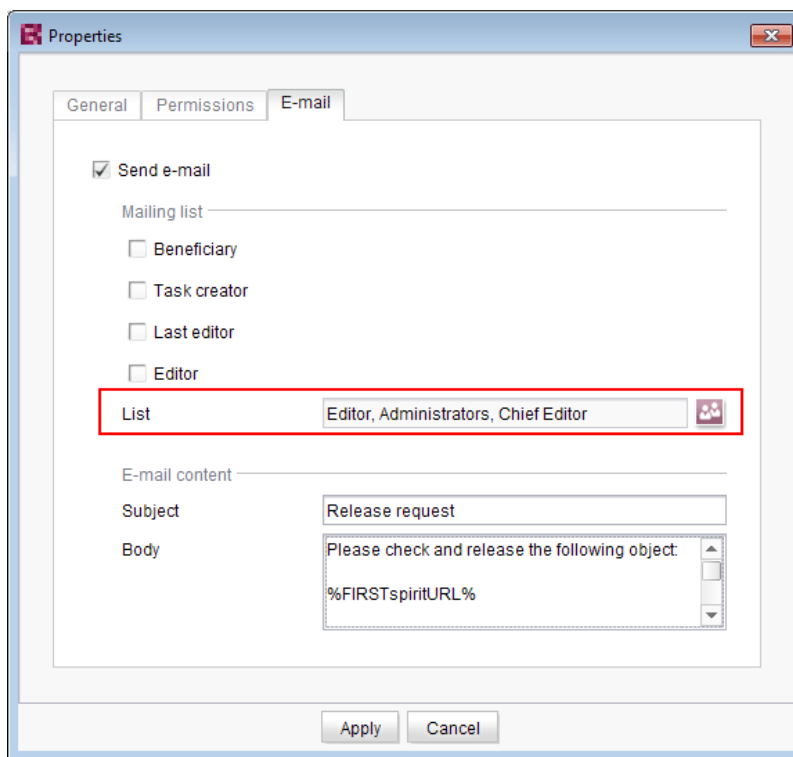

Changes to the design of FirstSpirit SiteArchitect resulted in these lists not being included in some versions of FirstSpirit version series 5.2 and 5.1. This error has been fixed in version 5.2R2-20: If at least one user or group is selected in this field, an e-mail is sent to the selected recipient(s).

! Migration information: If this function was used to define a list in an earlier version of FirstSpirit version series 5.2 or 5.1 (5.2R1, 5.1R1, 5.1R2, 5.1R3, 5.1R4), this list must be redefined following an update to the latest version (5.2R2-20) so that this error fix is applied and e-mails are sent to the users or groups in the defined list.

For more information about configuring workflows, see *FirstSpirit Online Documentation*, “Templates (Basics) / Composition of templates / Workflows”.

57.4 Context menu functionality and horizontal toolbar 5.2R5

In FirstSpirit SiteArchitect, the context menus for store tree items have been modified such that context menu entries are now always shown in a consistent order. Furthermore, the drop-down menus associated with the “Preview” and “New” buttons in the horizontal toolbar have been expanded:





The icon for showing the buttons of the horizontal toolbar which are faded out because of lack of column width can be found now at the right-hand edge of each column:



For further information, see *Documentation for FirstSpirit SiteArchitect*,

- “FirstSpirit SiteArchitect / The horizontal toolbar”
- “FirstSpirit SiteArchitect / The horizontal toolbar / Preview”
- “FirstSpirit SiteArchitect / The horizontal toolbar / New”

57.5 Creating a section reference via context menu or keyboard shortcut





5.2R8

A section reference can now also be created via the context menu entry “Paste as section reference” or via the keyboard shortcut **Ctrl + Alt + V**.

57.6 Display of Default Values in Data Sources 5.2.426, 5.2R5

FirstSpirit's Data Sources store is used to store and manage well-structured content, e.g. press releases, product catalogs, and address lists. The data is displayed in a tabular view:



| ID | G... | Product name | Product description | Picture | Picture description | Product type |
|------|-------------------------------------|--|---|---|----------------------------------|--------------|
| 4160 | <input checked="" type="checkbox"/> | [Master copy] 150W Modular Inverter / 12V Mini | The 150W modular inverter / 12V mini is mounted on the solar module. The small voltage range makes this safe and there are less |  | 150W Modular Inverter / 12V Mini | [Inverter] |
| 2050 | <input type="checkbox"/> | Connector | This solar connector has been designed for use in extreme environmental situations and to satisfy the demand for lighter, more |  | Connector | [Accesso |
| 2048 | <input type="checkbox"/> | Frame | The number of roof anchors is important for the stability of this frame; it enables use on pitched roofs of 20 to 60 degrees in virtually |  | Frame | [Accesso |
| 1989 | <input type="checkbox"/> | Adapter | With this adapter you can easily and flexibly connect up to 10 solar collectors with each other. The distance between the individual |  | Adapter | [Accesso |

If a template for a dataset defines an input component with a default value and a dataset based on this template does not override this value (i.e. an editor has not entered a value into this input component for that dataset), the detailed dataset view will show a pink frame around this input component:




Product name

Product name

Product description

In the tabular view, such default values used by a dataset will now be shown in a semi-transparent fashion:



| ID | Product name | Product description | Picture | Picture description | Product type |
|------|--|---|---|----------------------------------|--------------|
| 4672 | Product name | | | | |
| 4160 | [Master copy] 150W Modular Inverter / 12V Mini | The 150W modular inverter / 12V mini is mounted on the solar module. The small voltage range makes this safe and there are less |  | 150W Modular Inverter / 12V Mini | [Inverter] |
| 2050 | Connector | This solar connector has been designed for use in extreme environmental situations and to satisfy the demand for lighter, more |  | Connector | [Accesso |
| 2048 | Frame | The number of roof anchors is important for the stability of this frame; it enables use on pitched roofs of 20 to 60 degrees in virtually |  | Frame | [Accesso |

Previously, default values were not shown.

For further information, see

- *Documentation for FirstSpirit SiteArchitect*, chapters
 - “Data Store / Editing area of a data source (overview)”
 - “General operation / Default values”
- *FirstSpirit Online Documentation*, chapter
 - “Template development / Forms / Default values”

57.7 Drag-and-drop support for CMS_INPUT_DOMTABLE 5.2.424, 5.2R5

A central interaction pattern in ContentCreator and SiteArchitect is the affordance for simple data exchange via drag-and-drop, e.g. from a report or a (Windows) desktop into a FirstSpirit input component.

As of FirstSpirit version 5.2R5, the input component CMS_INPUT_DOMTABLE in SiteArchitect now also supports drop functionality. Now, objects of type *Text*, e.g. text from a word processing program such as Microsoft Word, may be inserted into CMS_INPUT_DOMTABLE using drag-and-drop.



When using the module “FirstSpirit OfficeConnect”, content from Microsoft Office documents may be inserted into an accordingly configured DOM input component using the keyboard shortcut **Ctrl+V**. Previously, this was only possible via the Import button.


For further information, see

- *FirstSpirit Online Documentation*, “Template development / Forms / Drag-and-drop”
- Module documentation for *FirstSpirit OfficeConnect*


57.8 Extended Filter and Sorting Functionality for Datasets 5.2R3

The Data Sources store is used to create and maintain strongly structured content, i.e. datasets. In the tabular overview of a data source, the existing datasets are displayed in two tabs that contain current and released datasets. This tabular overview supports filtering and sorting to customize the view.

In FirstSpirit version 5.2R3, **current datasets** can also be sorted by the time of modification such that the most recently edited datasets can be shown at the top of the list. This sorting can be enabled by using the new sort criterion “Modification Date”:

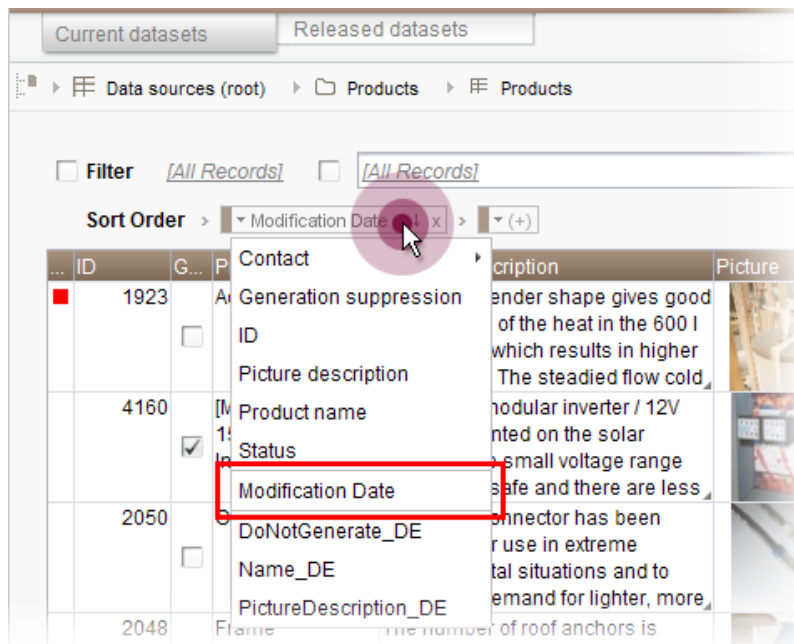


As before, the leftmost column in the tabular view may be used to sort datasets by workflow state. The tabular view may be configured to display only datasets which are not released by using the new filter “State: not released”:

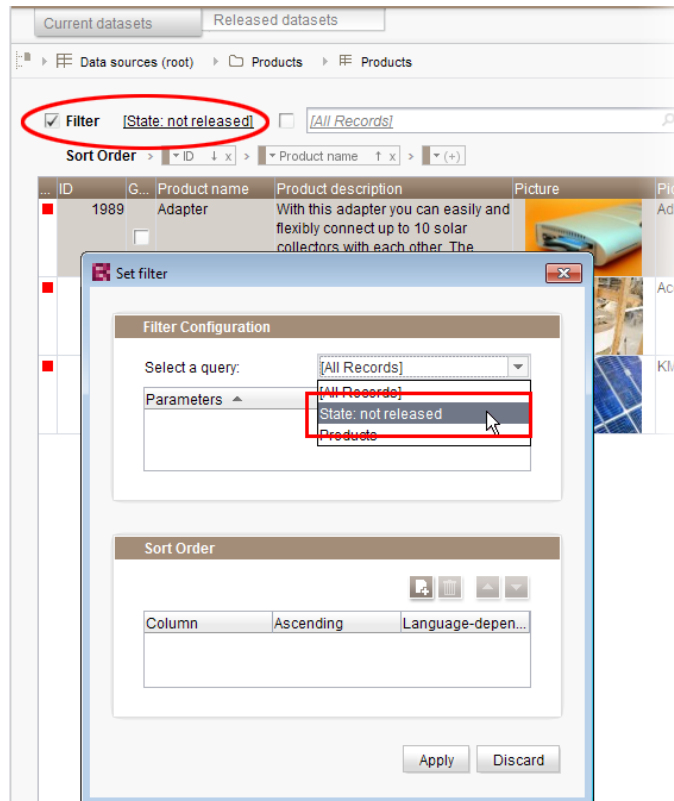

If a dataset should be **deleted** completely from a data source, it must be deleted in both the current and the released state. Datasets which have been deleted in the current state but are still present in the tab “Released datasets” (and potentially should be deleted there as well) are now marked with a paper bin icon:




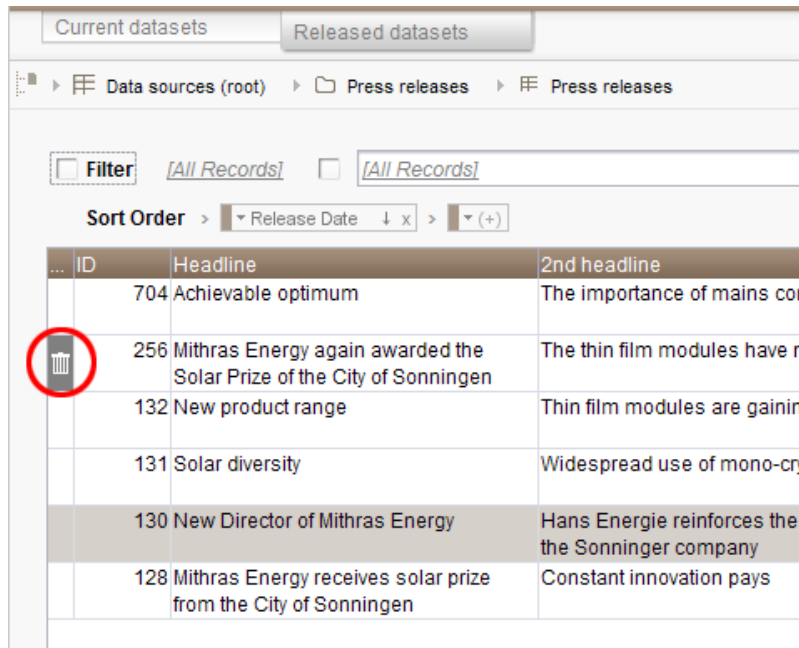

The screenshot shows a web interface with two tabs: "Current datasets" and "Released datasets". The "Released datasets" tab is active. Below the tabs is a breadcrumb trail: "Data sources (root) > Press releases > Press releases". There are two filter buttons, both labeled "[All Records]". Below the filters is a "Sort Order" dropdown menu set to "Release Date" with a "x" icon and a "+" icon. The main content is a table with three columns: "ID", "Headline", and "2nd headline". The table contains several rows of data. A trash icon in the first column of the second row (ID 256) is circled in red.


| ID | Headline | 2nd headline |
|-----|---|--|
| 704 | Achievable optimum | The importance of mains con |
| 256 | Mithras Energy again awarded the Solar Prize of the City of Sonningen | The thin film modules have n |
| 132 | New product range | Thin film modules are gaining |
| 131 | Solar diversity | Widespread use of mono-cry: |
| 130 | New Director of Mithras Energy | Hans Energie reinforces the e the Sonninger company |
| 128 | Mithras Energy receives solar prize from the City of Sonningen | Constant innovation pays |

This icon may be used to delete the associated dataset in its released state. In order to more quickly identify datasets which have been deleted in current state but are still present in a released state, the “Released datasets” table may be configured to display only such datasets by using the new filter “State: deleted”:

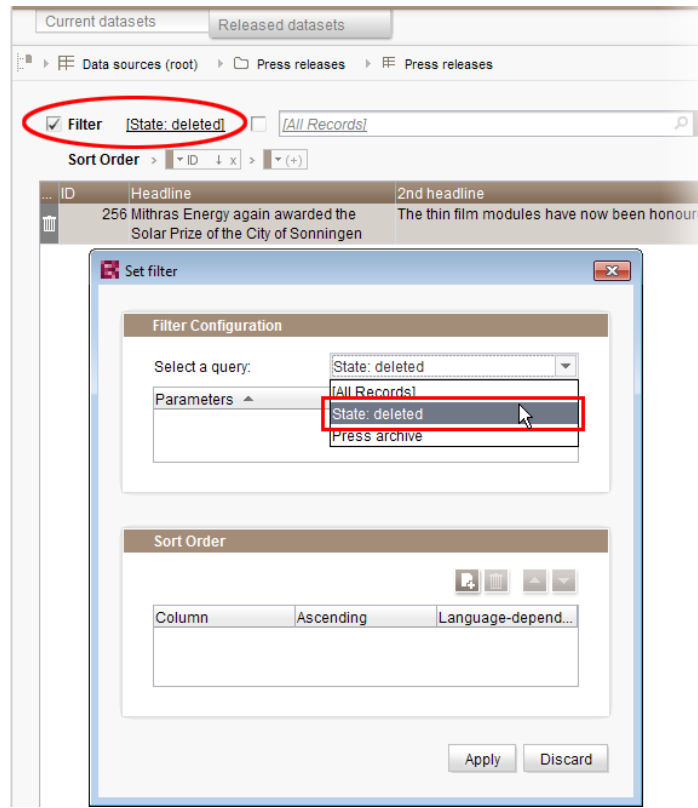


In order to sort released datasets by date of most recent release, use the newly-introduced sort criterion “Release Date”:



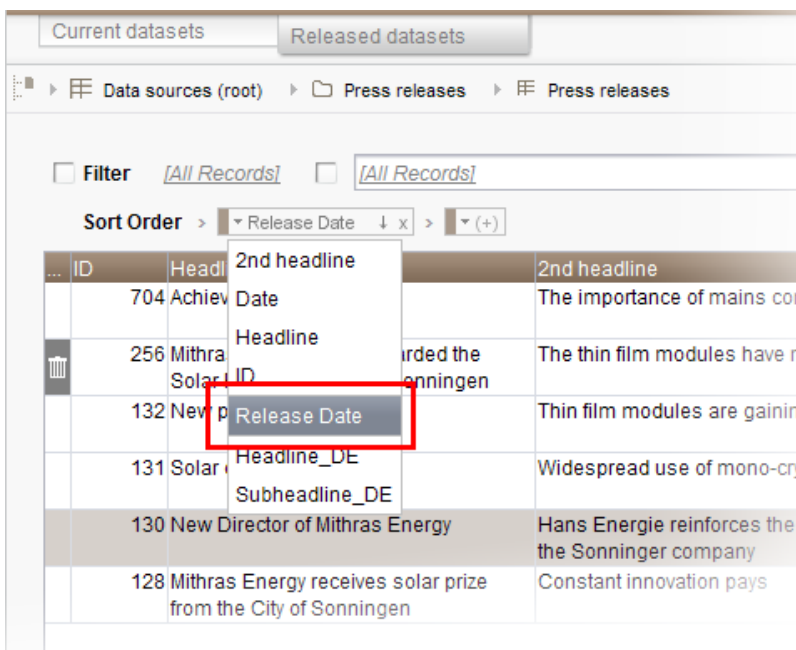

Sorting via the leftmost column in the “Released datasets” table is no longer possible.

Furthermore, datasets which are being deleted in the tab “Current datasets” may now be deleted from the “Released datasets” tab at the same time. This may be accomplished by checking the checkbox “Delete release version as well” in the confirmation dialog which is shown as a dataset is deleted:

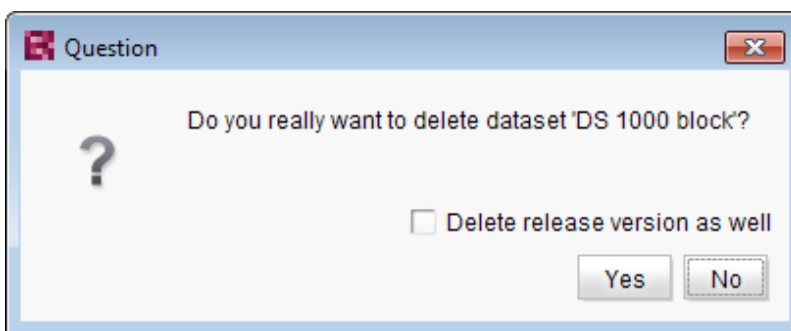

For further information, see

- *Documentation for FirstSpirit SiteArchitect*, chapter “Data Store”
- *FirstSpirit Online Documentation*, “Templates (basics) / Composition of templates / Database schemata”




57.9 FS_INDEX: Reuse of tabs in the details view 5.2R5

In FirstSpirit version 5.2R5, the user interface of the details view of the input component FS_INDEX has been optimized: the tabs in the details view will now be reused and visualize an active edit mode.

The details view is always started when a new entry is added to the index or an index entry is edited. Instead of the usual tree view in the left pane of the SiteArchitect window, an overview of the index' entries is displayed. In the editorial area, a new tab will be opened that shows the selected index entry. If another entry is selected in the index overview of the details view, this tab will be reused.

Edit mode is only automatically activated when adding a new index entry. If an existing entry should be modified, edit mode must be activated manually.

If edit mode is active, the same rules in tab handling apply as do to serial editing of datasets: when switching from one entry to another, changes to the first entry will be saved after a confirmation dialog is answered accordingly, the next entry will then be displayed in the same tab and will be in edit mode as well.

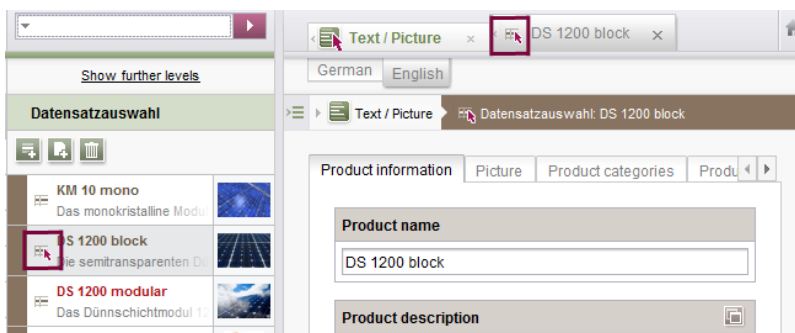

Active edit mode will be visualized using a red arrow icon on the tab of the entry that is being edited.

57.10 Integrated preview: Updated third-party software 5.2R7


The integrated preview in FirstSpirit SiteArchitect (menu entries “View / Integrated preview” and “View / Browser engine”) is based upon third-party software:

The browser engine “JxBrowser”, used to integrate “Google Chrome”, has been updated from version 4.9.5 to version 6.12.




In order to integrate “Internet Explorer”, another browser engine has been implemented (“JExplorer”, version 3.4) which is intended to ensure better stability when using Internet Explorer for integrated preview. However, use of this browser engine is not yet officially released and is currently in a BETA phase.

In **SiteArchitect**, this browser engine may be selected via the menu entry “View / Browser engine / Internet Explorer (BETA)”:

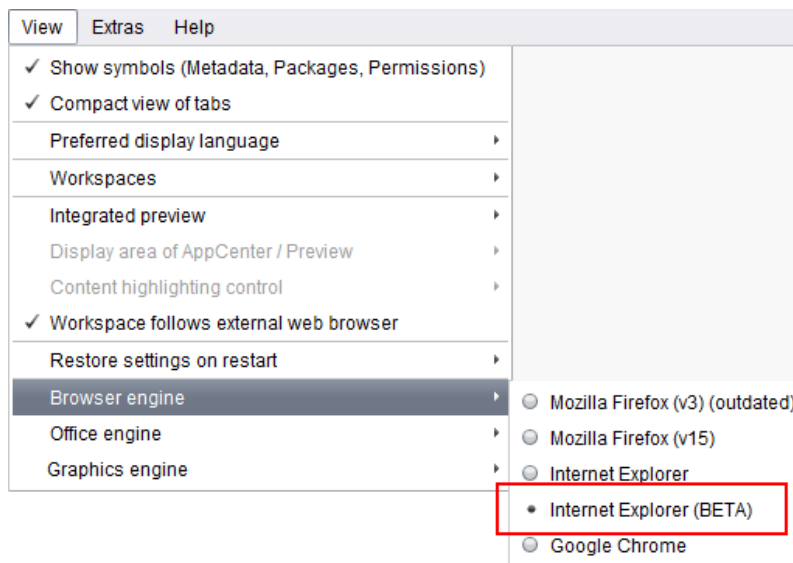

In **project properties** (“FirstSpirit ServerManager / Project properties / Client applications”, tab “Browser engine”), project developers may define if this browser engine should be preselected or fixed for users of this project, e.g.



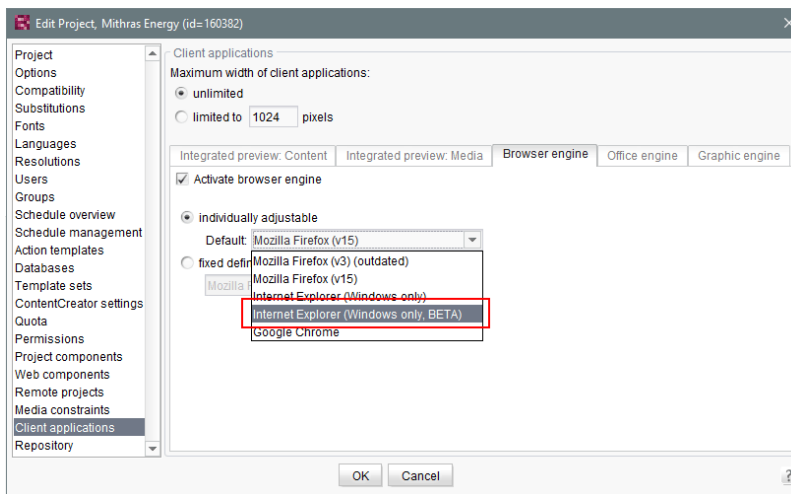

For further information, see

- *FirstSpirit SiteArchitect / The menu bar / View / Browser engine (→Documentation FirstSpirit SiteArchitect)*
- *FirstSpirit Manual for Administrators, chapter “Browser engine”*

57.11 Jumping to References in Template Code 5.2R9

In addition to functions for software-supported completion of template code, the current version of FirstSpirit also provides means for switching to elements referenced in the code (other templates, FirstSpirit objects) and form definitions (“GOM”) conveniently with a single click.

When the mouse cursor is hovered over the respective code expression, **Ctrl** displays information (name, object type, preview, path) regarding the referenced element in a tooltip.

Using **Ctrl** + **KLICK** allows for jumping to the referenced element directly.

This new functionality is available for the following template tabs:

- **Tab “Form”**
Reference to referenced templates and other FirstSpirit objects
Example: **CMS_INPUT_DOM** – Limit to link templates using the tag *LINKEDITORS*



```
<CMS_INPUT_DOM name="pt_intro" hFill="yes" ...>
  <FORMATS>
    <TEMPLATE name="p"/>
  </FORMATS>
  <LANGINFOS>
    <LANGINFO lang="*" label="Introduction" ...>
      <LA ...>
    </LAN ...>
  </LANGINFOS>
  <LINKEDITORS>
    <LINKEDITOR name="textlinkexternal"/>
    <LINKEDITOR name="textlinkexternal"/>
  </LINKEDITORS>
</CMS_INPUT_DOM>
```

Text link (external)
Link Templates

Example: **FS_DATASET** – Limit to a data source using the tag **SOURCES**

```
<FS_DATASET name="st_contact" allowDelete="...">
  <LANGINFOS>
    <LANGINFO lang="*" label="Contact" desc...>
      <LANGINFO lang="*" label="Contact" desc...>
    </LANGINFOS>
  <SOURCES>
    <CONTENT name="contacts"/>
  </SOURCES>
</FS_DATASET>
```

Contacts
Contacts

▪ **Tab “Rules”**

Reference to form definitions in the tab “Form” of the template, attribute “source”:

```
<RULES>
  <RULE>
    <WITH>
      <NOT>
        <LESS_THAN>
          <PROPERTY name="VALUE" source="st_rows"/>
          <NUMBER>1</NUMBER>
        </LESS_THAN>
      </NOT>
    </WITH>
    <DO>
      <VALIDATION scope="SAVE">
        <PROPERTY name="VALID" source="st_rows"/>
        <MESSAGE lang="*" text="The value may not be less than 1."/>
        <MESSAGE lang="DE" text="Der Wert darf nicht unter 1 sein."/>
      </VALIDATION>
    </DO>
  </RULE>
```

Press releases teaser
st_rows (CMS_INPUT_NUMBER)

▪ **Output Channels Tab**



Reference to form definitions in the tab “Form” of the template:


```
--</h3>  
<div class="clearfix te:st_linklist (FS_LIST)  
  --<!--$CMS_IF(!isWebEdit)$-->  
    --<!--$CMS_VALUE(editorId(editorName:"st_linklist"))$-->  
  --<!--$CMS_END_IF$-->  
--<!--$-->
```

A screenshot of code with a tooltip. The tooltip is titled "Tag-Cloud" and contains the text "Format Templates/Technical format templates". It points to the code element "st_linklist (FS_LIST)".

and referenced FirstSpirit objects


Example: referenced medium

```
$-- Footer --$  
<div class="footer">  
  <ul>  
    <li>$--  
      --<a href="#top"$CMS_VALUE(editorId(element:#glo  
        --$--  
    --</li>  
    <li>$--  
      --<a href="#top" onclick="self.print();return fa  
        --$--  
    --$--
```

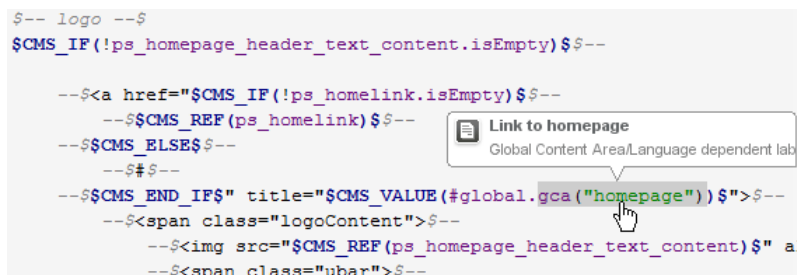A screenshot of code with a tooltip. The tooltip is titled "Link to homepage" and contains the text "Global Content Area/Language dependent label". It points to the code element "homepage".

Example: referenced template


```
$CMS_VALUE(pt_hear  
$CMS_I  
$C  
$CMS_END_IF$  
$CMS_RENDER(template:"tooltip",  
  infoLayer:pt_infoLayer,  
  infoLink:pt_infoLink,  
  infoPicture:pt_infoPicture,  
  infoHeadline:pt_infoHeadline)$
```

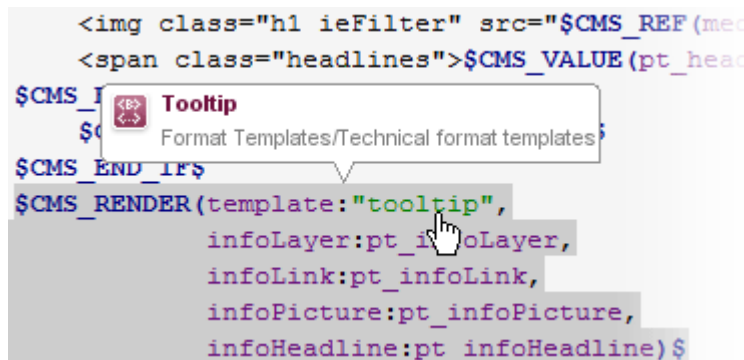A screenshot of code with a tooltip. The tooltip is titled "Tooltip" and contains the text "Format Templates/Technical format templates". It points to the code element "tooltip".

57.12 List view at folder level in the Media Store 5.2R13

As of the current FirstSpirit version, you can now select a list view in addition to the previously available Thumbnail view for the “Overview” tab at folder level in the Media Store. Use the **Customize layout** icon in the top right-hand corner to switch between the two views. The selected view applies to all folders in the Media Store and is also used for the respective user in other projects on the server.

List view

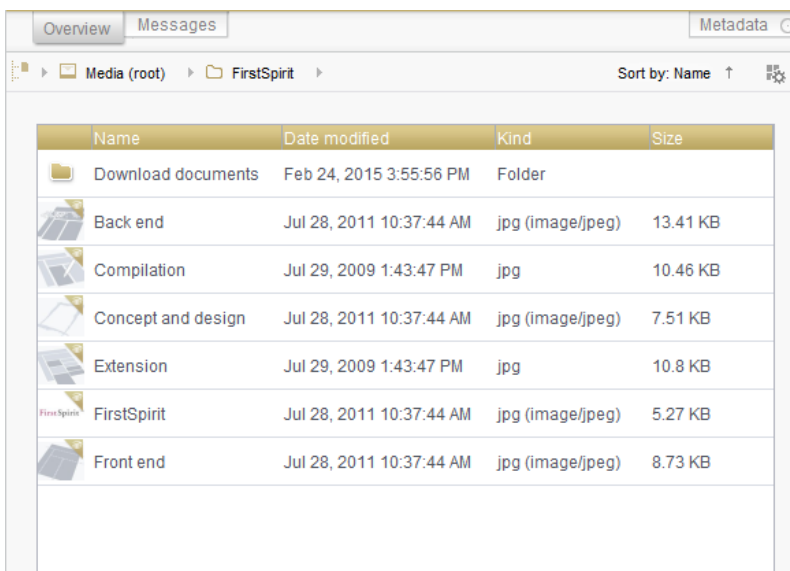

The screenshot shows the FirstSpirit Media Store interface in list view. At the top, there are tabs for 'Overview' and 'Messages', and a 'Metadata' button. The breadcrumb path is 'Media (root) > FirstSpirit'. The sorting is set to 'Name' with an upward arrow. The table below lists the following items:

| Name | Date modified | Kind | Size |
|--------------------|--------------------------|------------------|----------|
| Download documents | Feb 24, 2015 3:55:56 PM | Folder | |
| Back end | Jul 28, 2011 10:37:44 AM | jpg (image/jpeg) | 13.41 KB |
| Compilation | Jul 29, 2009 1:43:47 PM | jpg | 10.46 KB |
| Concept and design | Jul 28, 2011 10:37:44 AM | jpg (image/jpeg) | 7.51 KB |
| Extension | Jul 29, 2009 1:43:47 PM | jpg | 10.8 KB |
| FirstSpirit | Jul 28, 2011 10:37:44 AM | jpg (image/jpeg) | 5.27 KB |
| Front end | Jul 28, 2011 10:37:44 AM | jpg (image/jpeg) | 8.73 KB |

The list view contains columns for the preview icon, display name, change date, file type, and file size.

The width of the individual columns can be adjusted by dragging the column border with the mouse.

Click on a column heading to display the media sorted according to the values in the relevant column.

57.13 Logging the Integrated Preview (Browser Engines) 5.2R10

Logging supports FirstSpirit developers and administrators when it comes to identifying and rectifying errors. Logging takes place at different points in FirstSpirit, e.g., log messages relating to actions on the server are retained in the `fs-server.log` file, log messages relating to schedules in the `fs-schedule.*.log` file, etc.




With the current FirstSpirit version, log messages for the browser engine used for the integrated preview are now also retained, namely in the SiteArchitect log files `.firstspirit*/logs/SiteArchitect*.log`. This can be opened via the “Show log file in File Manager” entry in the “Help” menu in the local file directory or displayed in a separate window via the “View log” menu item.

Logging depends on the log level set in the relevant client. This can be adjusted via the `-DLogLevel` (e.g., `-DLogLevel=DEBUG`) parameter in the connection settings (“Start page / Connection settings / Optional parameters”) or the “Extended logging” entry in the “Extras” menu. The default log level is `INFO`.

57.14 Optimization of selection dialog 5.2R5

In SiteArchitect, the selection dialog offers navigation and search functionality which enable quick location of objects which should be referenced, e.g. images or files from the Media store or page references from the Site Structure store (e.g. input components `FS_REFERENCE`, `FS_LIST`, `FS_DATASET`). The dialog only displays objects which may be selected, based on the constraints set by the input component.

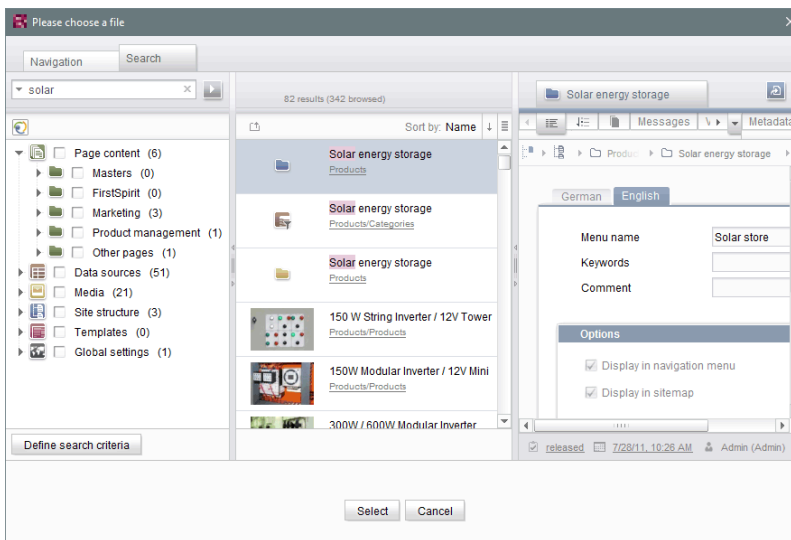

Selection dialog of `FS_REFERENCE` (SiteArchitect)

In FirstSpirit version 5.2R5, the search interaction pattern in this dialog has been optimized:

- By default, the selection dialog will now search **all stores / folders of all projects** which are allowed, based on the constraints set by the input component (e.g. `FS_REFERENCE: tag SOURCES / FOLDER`, `FS_DATASET: tag SOURCES / CONTENT`). Previously, search only



considered projects / stores / partial trees which were selected by the user in the tree of the tab “Navigation”. In order to limit search to certain projects / stores / partial trees, users may now toggle checkboxes in the tab “Search” accordingly.

- If search is started from the tab “Navigation”, any existing search limitations set in the tab “Search” will be **reset**. In the tab “Search”, checkboxes will thus no longer be set automatically.
- The display of the **suggestion list** below the search field has been improved.

For further information

- about the selection dialog, see *Documentation for FirstSpirit SiteArchitect*, chapter “Selection dialogs”,
- about specific input components, see *FirstSpirit Online Documentation*.

57.15 Optimized keyboard control for consideration of pages and sections in generation 5.2R4


In the Page Content store, pages and sections can be configured with the following options:

- (Pages) “Page is completely translated to this language”: Depending on project settings, the page's specific project language version for which this option is set will be generated or not.
- (Sections) “include this section in the output”: During generation, the section's specific project language version for which this option is set will be rendered on the page or not.

These settings can be changed for a specific project language by toggling the checkbox on that language's tab in the workspace area of an element that is in edit mode.

The confirmation dialog which appears after toggling such a checkbox (e.g. “This section will no longer be available for generation in the output. Do you wish to continue?”) used to use “No” as its default answer. In order to support a more efficient editorial process, starting with FirstSpirit version 5.2R4, this dialog's default answer will be “Yes”.



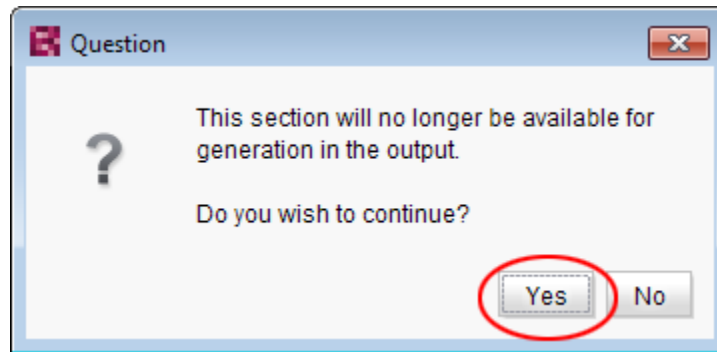

With this change, the confirmation dialog can generally be confirmed by pressing either `Enter` or `Space` on the keyboard.


For further information about these functionalities, see *Documentation for FirstSpirit SiteArchitect*,

- chapter “Settings at page level”
- chapter “Settings at section level”

57.16 Optimized keyboard control of CMS_INPUT_LIST 5.2R4

Using the multiple selection component CMS_INPUT_LIST, a user can select from a set of values specified by project developers.

Until now, selected entries could only be removed from the list via the context menu:

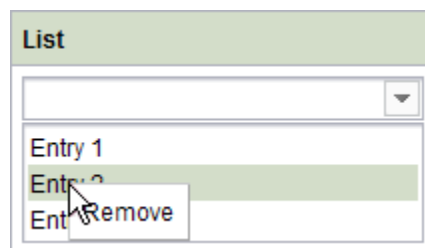

As of FirstSpirit 5.2R4, entries can now be removed using the keyboard shortcut `Del`.

For further information about CMS_INPUT_LIST, see



- *Documentation for FirstSpirit SiteArchitect*, chapter “Multiple selection list (CMS_INPUT_LIST)”
- *FirstSpirit Online Documentation*, “Template development / Forms / Input components / LIST”

57.17 Optimizing code completion in templates 5.2R2

Code completion allows FirstSpirit templates to be programmed more quickly, while the lists of suggestions offer a simple source of reference. This can be found in FirstSpirit templates on the

- Form
- Rules and
- Output


tabs.

The code completion function has been expanded in FirstSpirit version 5.2R2. Now, for example, the output tabs even show identifiers for the input components defined on the form tab, as well as methods which can be applied to the values returned by the input components. These can be inserted at the insert mark. The lists of suggestions can also be filtered by simply entering the necessary search text.

For more information, see the *FirstSpirit Online Documentation*, “Interesting tips / Input assistance”.

57.18 Repeating a search after erroneous input 5.2R8


If the search string used for a full-text search contains a special character that cannot be used in search, an error message will be displayed in the search results pane.

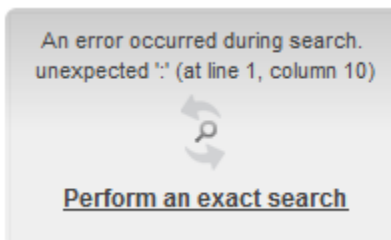

This error message now provides an opportunity to repeat the search by clicking **Perform an exact search**. In this repeat search, quotation marks will be placed around the search string, and an exact search will be performed.

57.19 Revised selection dialog and opening new workspaces 5.2R4

The selection dialogs in SiteArchitect (for example input components FS_REFERENCE, FS_DATASET) offer navigation and search options for quickly locating the objects that are to be referenced, e.g., images and files from the media store or page references from the site store.

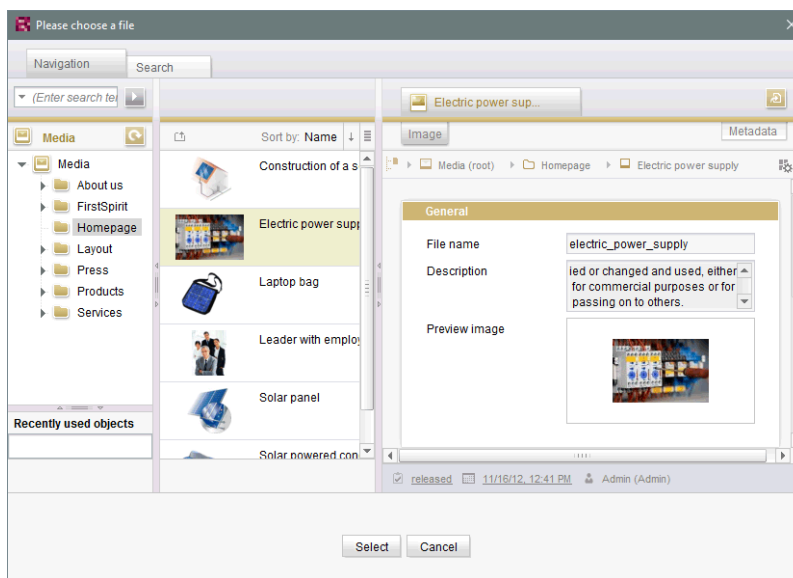

With FirstSpirit version 5.2R4, the selected object can now be opened in a new workspace via the



icon. The notification “The element 'xyz' has been opened in a new workspace.” is displayed. Moreover, new workspaces are now opened on the right of the current workspace for better orientation, especially when working with a large number of workspaces (for example icons




and functions “Display in new workspace”, “Extras / View Template”, “View current / View release”). Previously, new workspaces were always opened on the far right (in last position).

For more information please refer to *Documentation for FirstSpirit SiteArchitect*, Chapter “Selection dialogs”.

57.20 Revised version comparison 5.2R2

All project data in a FirstSpirit project has a version history, which documents how the data has been changed over time. Changes can generally be displayed by visualizing the differences between the revisions. To do this, two revisions can be selected for comparison with each other within the version history (**Ctrl** + **H** or “Version history” context menu function).


The corresponding dialog has been updated in FirstSpirit version 5.2R2 (with the exception of: Version comparison to (global) pages, (global) sections, datasets):

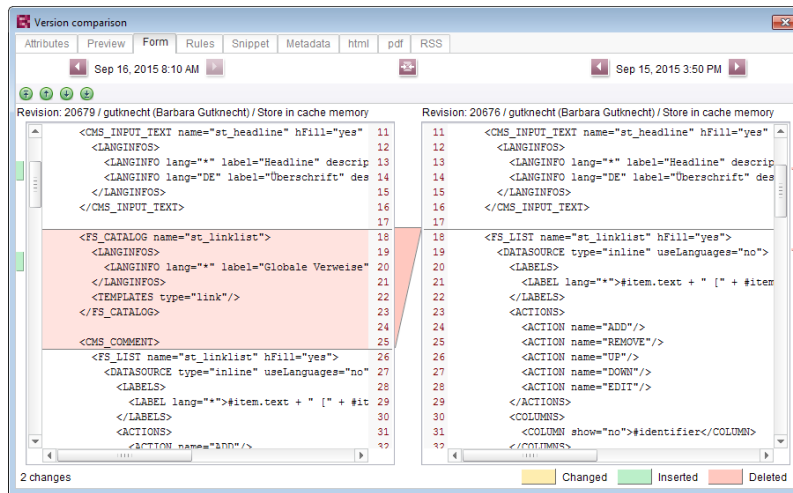

Version comparison of templates

The dialog now also allows you to “merge” the selected versions, e.g.,



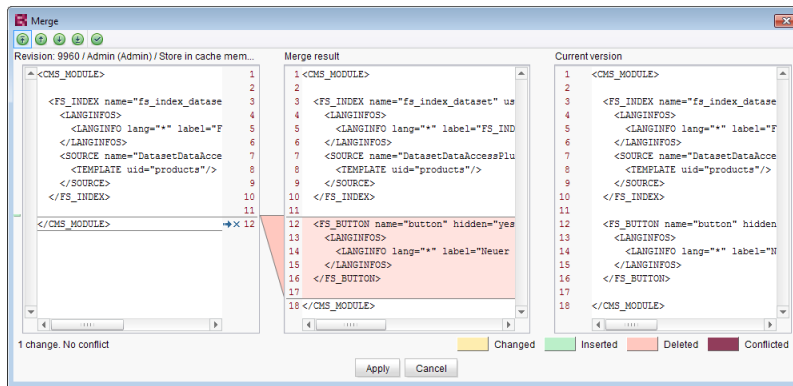

Merging changes from several revisions


For more information, see *FirstSpirit Online Documentation*,

- “Templates (Basics) / Basics / Functions via context menus / Version history / Compare”
- “Templates (Basics) / Basics / Functions via context menus / Version history / Merge”

57.21 Selection of revisions for merge 5.2R4

All project data in a FirstSpirit project possess a revision history that may be used to trace changes of data over time. Based upon this historical data, changes made to two revisions of the same object may be compared using a difference visualization. To do so, two of an object's revisions that should be compared are selected in the “Version history” dialog (**Ctrl** + **H** or context menu entry “Version history”), and a click on the “Compare” button will display a difference visualization of the two revisions, named “Version comparison”. In this “Version comparison” dialog, data of the two compared revisions may be merged:



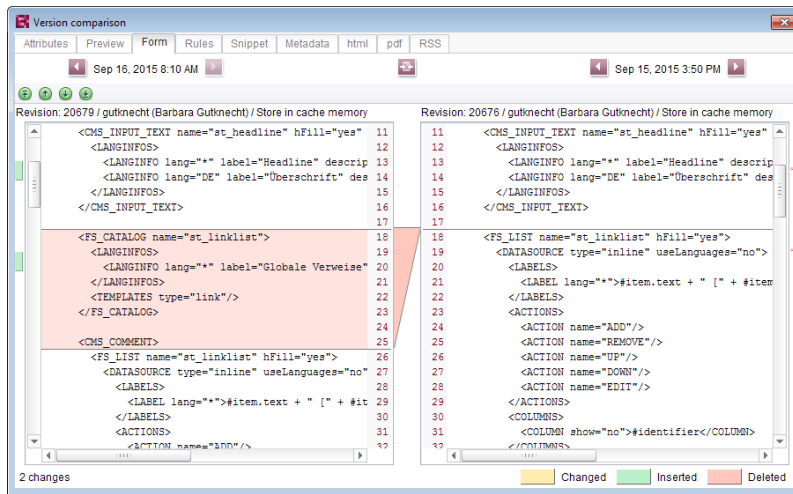

Functionality "Merge" in version comparison

Until now, the "Merge" functionality (in "Version comparison" dialogs, e.g. the button



for template elements) was available on almost all tabs (depending on the specific element type: "Attributes", "Child list", "Metadata", "Variables", "Form", "Rules", "Snippets", template sets). A merge could potentially be used to modify system information (tabs "Attributes", "Child list"). In order to prevent modification of such system information, FirstSpirit version 5.2R4 and later versions restrict availability of merge functionality as follows:

- **Tab "Child list":** merge functionality is **not available**
- **Tab "Attributes":** merge functionality is **only available to server and super administrators**

Thus, a user possessing the appropriate privileges will continue to be able to modify attributes of an element.


For further information, see *FirstSpirit Online Documentation*, page "Templates (basics) / Basics / Functions via context menus / Version history / Compare".



57.22 Simplified Creation of Entries in FS_CATALOG 5.2R4

The input component FS_CATALOG allows creation of lists with sections or links such that editors may maintain several sections or links, respectively, within a single input component.

In SiteArchitect, if more than one section or link template were available, selection of a template for a new entry was done via a dialog. In FirstSpirit version 5.2R3, selection of a template for a new entry is now done via a pop-up menu (analogous to FS_LIST, `<PARAM name="select-ui">list</PARAM>`) from which the desired template may be selected:

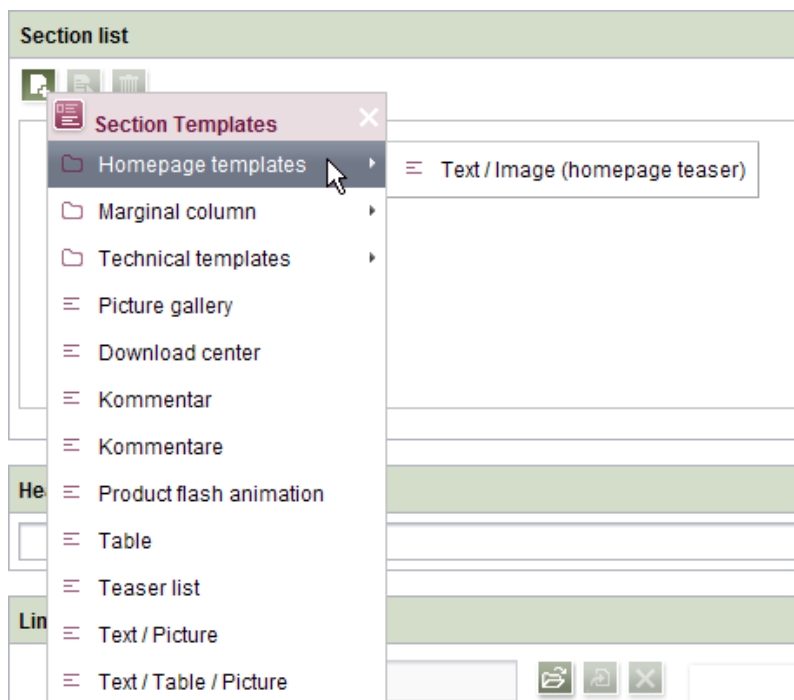

If the FS_CATALOG input component is not configured to limit the set of allowed templates (i.e. no `TEMPLATE` tags are defined within the `TEMPLATES` tag in the component's configuration) or if more than 21 allowed templates are defined, the template selection pop-up will also display a partial folder hierarchy of the Templates store, such that all folders between the Templates store root and individual, allowed templates are shown. The pop-up menu may be closed by either clicking on its title bar or the "Close" icon or by pressing ESC.




If the FS_CATALOG input component is configured to allow only one template (i.e. only one TEMPLATE tag is defined within the TEMPLATES tag in the component's configuration), the template selection pop-up will not appear, and the new entry will automatically be created using this template.

For further information about FS_CATALOG, see

- *FirstSpirit Online Documentation*, “Template development / Forms / Input components / CATALOG”
- *Documentation for FirstSpirit SiteArchitect*, chapter “Catalog (FS_CATALOG)”

57.23 Workflows / Task list: Aborting workflows now requires project administrator privileges 5.2R10

The task list in FirstSpirit SiteArchitect manages all tasks created in FirstSpirit, also called “workflows”:

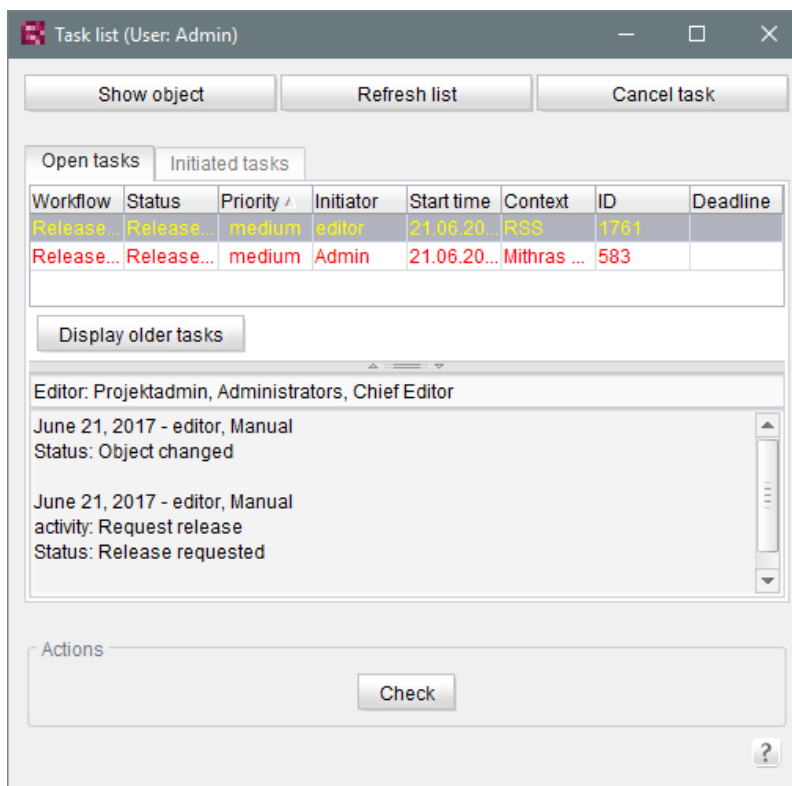

The button “Close task” may be used to close a task and thereby abort the associated workflow. This may become necessary if a task has become invalid (e.g. by deleting the object on which the workflow



is active). Until now, this action was available to all users. As of the current FirstSpirit version, this action now requires at least project administrator privileges due to security considerations because aborting workflows, especially on referenced objects, can potentially lead to undefined states. If the current user does not have sufficient privileges to close a task, the button is inactive.

In this context, the button's label has been changed from “Close task” to “Cancel task”.

For further information, see *Documentation for FirstSpirit SiteArchitect*, chapter “Task list”.

58 System

58.1 Integrated Software 5.2R4

With FirstSpirit 5.2R4, the following, internally used software has been updated:

- **Java Runtime Environment** (“JRE”, included in FirstSpirit Launcher)
Update from version 1.8.0_31 to 1.8.0_92
- **ASM** (Library for analyzing and modifying Java bytecode)
Update from version 3.1 to 5.1
(improved interoperability between modules, which are developed for Java 8, and FirstSpirit)
- **Apache Derby** (integrated database for testing purposes)
Update from version 10.11.1.1 to 10.12.1.1

! As before, use for production purposes is not recommended!


! Note: Use of Derby databases prohibits in-place **downgrades** to FirstSpirit version 5.2R3 or older. Error message after downgrade:

```
ERROR XSLAN: Database at [path] has an incompatible format with the
current version of the software. The database was created by or upgraded
by version 10.12.
```

Workaround: Export with FirstSpirit version 5.2R4 and import into a FirstSpirit server running version 5.2R3.



- **Eclipse Jetty** (integrated web server)
Update from version 9.2.9 to 9.2.15
Furthermore, security improvements have been undertaken concerning the default configuration.

 As before, use for production purposes is not recommended!

58.2 Integrated Software 5.2R3

The integrated Chrome browser engine “JxBrowser” has been updated to version 4.9.5.

58.3 Integrated Software 5.2R12

With the current FirstSpirit version, the following, internally used software has been updated:

- **Java Development Kit** (“JDK”, included in FirstSpirit Launcher)
Update from version 1.8.0_121 to 1.8.0_131

58.4 Integrated Software 5.2R19

With the current FirstSpirit version, the following, internally used software has been updated:

- **Java Development Kit** (“JDK”, included in FirstSpirit Launcher)
Update from version 8u131 to 8u161

58.5 Integrated Software 5.2R20

With the current FirstSpirit version, the following, internally used software has been updated:

- **Google Web Toolkit** (“GWT”, used for ContentCreator)
Update from version 2.7 to 2.8.2
- **Beanshell**
Update to version 2.1.9



- **Eclipse Jetty** (contained in the module `fs-jetty.fsm`)
Update from version 9.4.8 to 9.4.9
- **ASM** (Library for analyzing and modifying Java bytecode)
Update to version 6.1

58.6 Integrated software 5.2R14

Updated the integrated Chrome browser engine “JxBrowser” to version 6.15.

58.7 Signing with SHA-256 5.2.615, 5.2R7

Previously, FirstSpirit JAR files were signed using SHA-1. Oracle is planning to cease support of SHA-1 in the JDK version lines 6, 7, and 8 in April 2017 (see <https://www.java.com/en/jre-jdk-cryptoroadmap.html>).

Due to this reason, as of the current FirstSpirit version, signing is now carried out using SHA-256.

Starting in April 2017, if an existing FirstSpirit installation should be used with a newer Java version which no longer supports SHA-1, an update to the current FirstSpirit version is required as well in order to continue using FirstSpirit with Oracle JDKs.

For further information, see [FirstSpirit Community](#).

If you have further questions about this topic, please contact e-Spirit's Technical Support team via <https://help.e-spirit.com>.

58.8 Update of libraries 5.2R16

With the current FirstSpirit version, the following, internally used libraries have been updated:

- **Synthetica** (Library for the graphical user interface)
Update to version 2.3.30
- **ASM** (Library for analyzing and modifying Java bytecode)
Update to version 6.0



58.9 Updated third-party software 5.2R18

The browser engine “JxBrowser”, used to integrate “Google Chrome”, has been updated to version 6.18.

58.10 Updating Apache FOP 5.2R14

Apache FOP (“Formatting Objects Processor”) enables, for example, FirstSpirit content to be output in PDF format. A module is used to provide support for Apache FOP in FirstSpirit: *fs-fop.fsm*.

In the current version of FirstSpirit, the version of the Apache FOP used internally was updated from 1.1 to 2.2.

58.11 Using Java 9 (EAP) 5.2R18

As of FirstSpirit version 5.2R18, support for Java 9 (for FirstSpirit Server and Clients) will be part of the early access program (“EAP”, see Chapters “FirstSpirit product update 2018”, and “Oracle Java”). Using existing FirstSpirit installations with Java 9 will require slight changes to configuration files in the file system:

1. First, perform an inplace upgrade of the desired FirstSpirit server (see *FirstSpirit Installation instruction*, Chapter “Via a tar archive”). In this way, the start script will be updated automatically (*fs5* for Linux).
2. Replace the file *fs-wrapper.conf* (or for servers running in “isolated mode” the file *fs-wrapper.isolated.conf*) in the FirstSpirit subdirectory `~\conf` by the content of the file *fs-wrapper.conf.default.txt* (or by the content of the file *fs-wrapper.isolated.conf.default.txt*) in the subdirectory `~\conf\conf-all` and adopt individual changes which you have made in the file *fs-wrapper.conf*.
3. Copy the files
`fs-wrapper-j1.include.conf.default.txt`
`fs-wrapper-j2.include.conf.default.txt`
from the subdirectory `~\conf\conf-all` to `~\conf`, rename them to
`fs-wrapper-j1.include.conf`
`fs-wrapper-j2.include.conf`
and adopt the GC and storage parameters to the individual requirements of the FirstSpirit server.



FirstSpirit can also be used with Java 9 as a Windows Service. If you wish to do this, please contact Technical Support for assistance.

New installations do not require a change of the above mentioned files.


Due to the extended security checks in Java 9, the use of this Java version will lead to slowdown, especially during client start-up and during the first execution of functionality that is dynamically downloaded by the client.

If Java 9 is being used, a corresponding message is logged when the Server is started.

58.12 Using Jetty as a module (EAP) 5.2R18


As of FirstSpirit version 5.2R18 the module `fs-jetty.fsm` can also be used with FirstSpirit servers that are not operated in “isolated mode” but in “legacy mode”. For usage in “legacy mode” it is part of the early access program (“EAP”). This module bases on the most recent version: 9.4. However, this version is not compatible with Java 7 and requires at least Java 8.

In order to use Jetty as a module, the module `fs-jetty.fsm` has to be installed on the FirstSpirit server and the corresponding service “JettyService” has to be started in the server properties of the ServerManager:

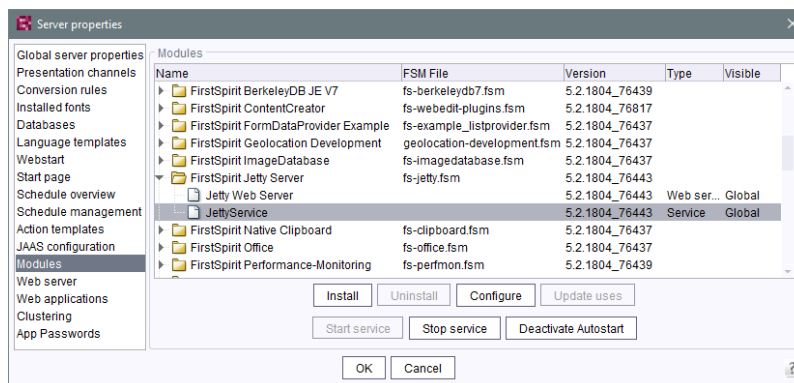


Here it is also possible to configure the favored port (changing the port requires a restart of the service):



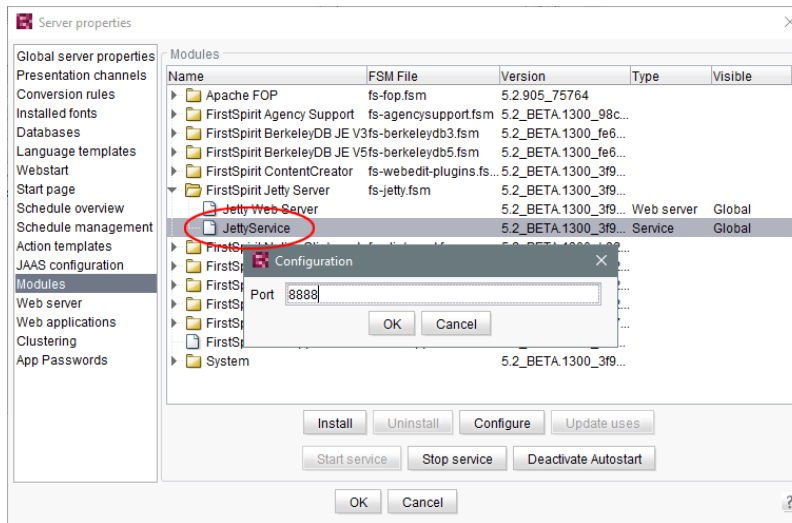


A new web server of the type “Jetty Web Server” may be added using “Webserver” in the server properties (e.g. with the name “IsolatedJetty”):

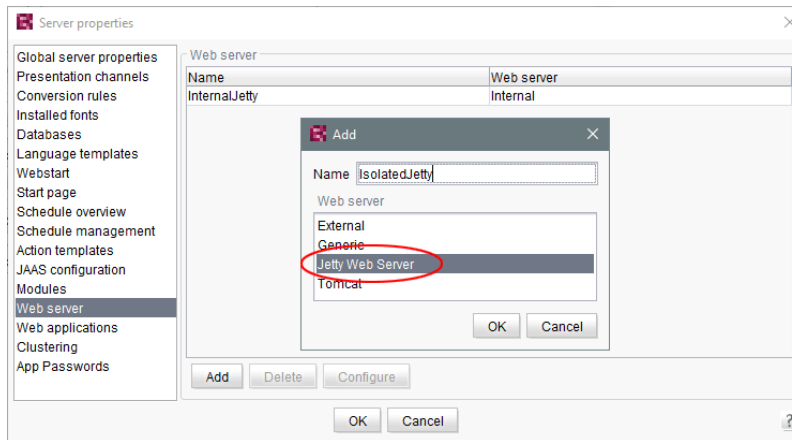

The web server may now be selected in the project properties under “Web components”:



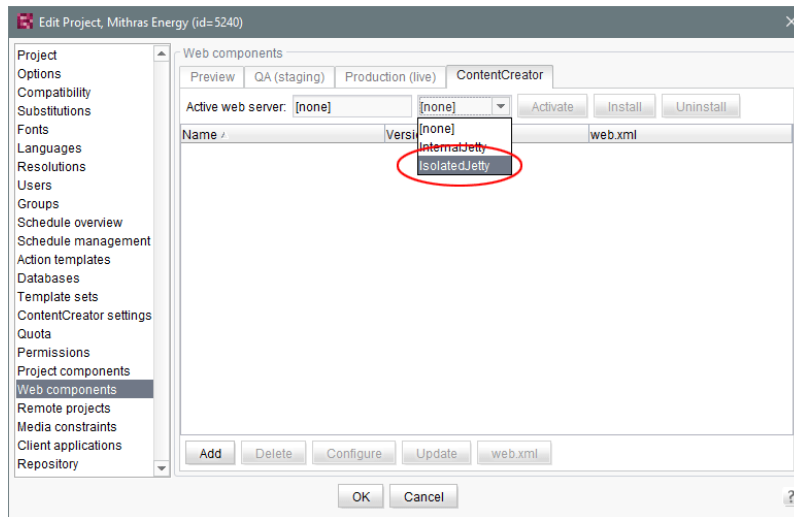


Both the earlier implementation “InternalJetty” and the new implementation as a module run within the same JavaVM as the FirstSpirit server. This configuration is not suitable for production operation and should only be used for tests. For more complex configuration requirements (e.g. adjustment of memory size, timeouts, number of threads per deployed application, ...), use of an external web server (e.g. Tomcat) is recommended.

59 Template Wizard

59.1 Activate/deactivate crawling 5.2R2

The FirstSpirit Template Wizard allows you to load HTML content into a project. An external URL can be specified as a source for this.

The new “Follow links” checkbox can now be used to configure “Crawling” (“Select URL” function).

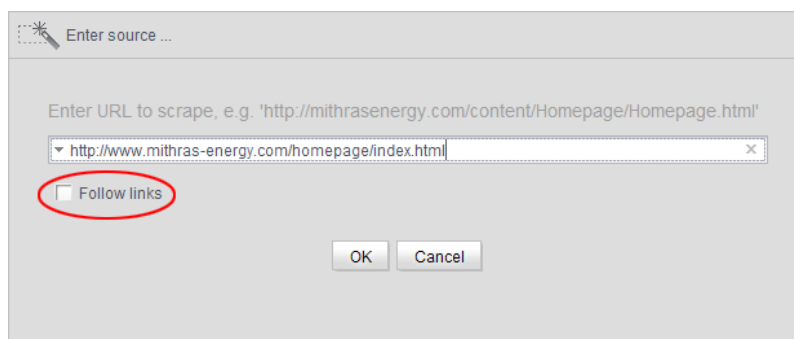


- If the checkbox is **not checked**, then crawling is restricted to the HTML structure transferred here. In this case, only the transferred HTML structure is analyzed and added to the import project. Other URLs referenced within the HTML structure are not analyzed. This is the default setting.
- If the checkbox is **checked**, all URLs referenced in the transferred HTML structure are analyzed and added to the import project. If these URLs then in turn reference other URLs, they too are analyzed, etc. In this case, you must ensure that the nesting depth is not too deep, as the import process can potentially take a long time if there are a large number of URLs.

For more information on working with the FirstSpirit Template Wizard, see *FirstSpirit Online Documentation*, “Template development / Template Wizard”.

59.2 Configure overview 5.2R2

The “Overview” tab shows all the content that has been imported into the Template Wizard to date. They are displayed in table format with the name, source path, file name, etc. This view can be configured by clicking the icon at the right-hand edge of the table header:

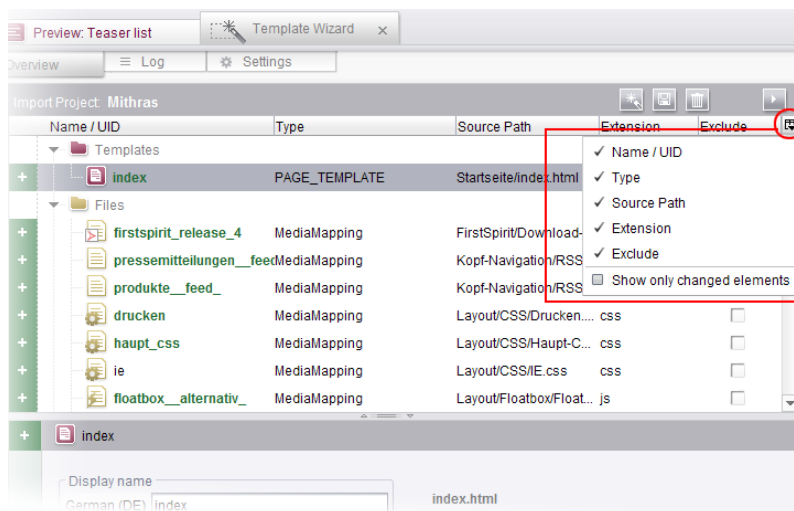

This can be used to determine which columns are shown or hidden.

If the “Show only changed elements” checkbox is activated, then only elements that have changed compared to the last status imported are displayed in the overview (inserted as new, changed in the design deliverable, deleted in the design deliverable, etc.).



For more information, see *FirstSpirit Online Documentation*, “Template development / Template Wizard / Overview”.

59.3 Detecting and merging changes 5.2R2

The FirstSpirit Template Wizard offers tools for detecting changes to the source object and then merging this changed content with content which has already been edited and imported.

This involves differentiating between three sources:

- Local root directory
- Import project
- FirstSpirit project

Changes can be made:

- between the local root directory and the import project
- between the import project and FirstSpirit project

For more information, see *FirstSpirit Online Documentation*, “Template development / Template Wizard / Detecting changes”.

59.4 Protection against simultaneous project editing 5.2R2

The FirstSpirit Template Wizard infrastructure partially automates the process of transferring HTML mockups to FirstSpirit. It provides functions which can analyze the HTML templates supplied, identify referenced images and files in HTML content, and import all required content into FirstSpirit.

In FirstSpirit version 5.2R2 and higher, FirstSpirit ensures that import projects can only be edited by one user at a time. If the selected import project is already open in the Template Wizard and being used by another FirstSpirit template developer, the message “Agency Project is already locked by [...]”. In this case, the project cannot be loaded until the other user closes it in the Template Wizard.

For more information on working with the FirstSpirit Template Wizard, see *FirstSpirit Online Documentation*, “Template development / Template Wizard”.



60 Deprecations

For e-Spirit, an important goal in software development is to avoid introducing incompatibilities and migration expenditures related to updating from one FirstSpirit release to the next as much as possible or to compensate for these within the software. FirstSpirit updates should generally be deployable with little effort or able to be carried out in a fully automated fashion.

However - not least in order to ensure maintainability and to future-proof the software - e-Spirit cannot fully avoid replacing existing functionality with new mechanisms. In the future, functionality that will be removed from the software will be listed in this section, including the date at which time the functionality will be removed.

| Functionality | Deprecated as of | Will be removed/ Was removed as of |
|---|------------------|---------------------------------------|
| FirstSpirit Developer API: de.espirit.firstspirit.agency.GroupsAgent | 5.2R15 | May 2018 |
| Oracle Java 7 Support | 5.2R15 | June 2018 |
| Integrated preview for content (Mozilla Firefox, v3 and v15) | 5.2R18 | August 2018 |
| Integrated preview for content (Internet Explorer old) | 5.2R18 | May 2018 |
| Integrated Jetty | 5.2R18 | August 2018 |
| Operating-system specific third-party applications in the AppCenter of the FirstSpirit SiteArchitect (exception: browser Integration) | 5.2R19 | September 2018 |



61 Overview

| ID | Description | Categories | Version |
|--------|---|---|---------|
| 50259 | <p>FirstSpirit version 5.2R3 enables sending e-mails via SMTP using authenticated connections. Authentication is configured in the configuration file <code>fs-server.conf</code>.</p> <p>Further information can be found in chapter “Administration: SMTP Authentication”.</p> | FirstSpirit Administrator, Security, Server-Manager | 5.2R3 |
| 69882 | In a data source, an already released dataset was erroneously displayed as not released after starting a workflow. | Content Store, SiteArchitect, Workflow | 5.2R2 |
| 72253 | <p>As of the current FirstSpirit version, media may be converted between being language-dependent and language-independent via the API.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Making media language-dependent or language-independent via API”.</p> | FirstSpirit API, Media Store | 5.2R16 |
| 77840 | Optimized display of the bookmark drop-down list which is accessible via the bookmark button in the horizontal toolbar of SiteArchitect. | Bookmarks, SiteArchitect | 5.2R3 |
| 100258 | Optimized display of recently used objects from remote projects for input components that use selection dialogs for selection of references (FS_REFERENCE, CMS_INPUT_IMAGE_MAP, links...). | SiteArchitect | 5.2R8 |
| 113373 | In ServerMonitoring and ServerManager, the default text for messages (functionality “Send message”) is now identical. | Server Administrator, ServerManager, ServerMonitoring | 5.2R2 |
| 119901 | <p>As of the current FirstSpirit version, the URL creation method for remote projects can also be specified in the remote project configuration of the target project.</p> <p>Further information can be found in chapter “Modules: Corporate Media: Specifying URL creation method for remote projects”.</p> | Advanced URL, FirstSpirit Administrator, Generation, Modules, Remote access, Server-Manager | 5.2R10 |



| ID | Description | Categories | Version |
|--------|--|--|-------------------|
| 120150 | <p>Optimized the dialog “Select” for features which were stored on the server via the button “Save feature”. It is now possible to delete a stored feature.</p> <p>Further information can be found in chapter “Modules: Corporate Content: ContentTransport: Deleting feature collections”.</p> | Content Transport | 5.2.611, 5.2R7 |
| 125269 | <p>Frequently used objects in a FirstSpirit project are now also visualized in editing dialogs in ContentCreator.</p> <p>Further information can be found in chapter “ContentCreator: Visualization of frequently used objects”.</p> | ContentCreator, Editor | 5.2R2 |
| 128058 | <p>Optimized updating the value of an FS_DATASET input component when multiple users perform edits in parallel.</p> | Input Components, SiteArchitect | 5.2R2 |
| 131707 | <p>New interface <code>UserStatisticsAgent</code> in the package <code>de.espirit.firstspirit.agency</code> (FirstSpirit Developer API).</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Obtaining the most recent login date of a user via API”.</p> | FirstSpirit API | 5.2R16 |
| 133908 | <p>In SiteArchitect and ContentCreator, an update of the preview may be triggered via the newly-implemented interface <code>PreviewOperation</code> (package <code>de.espirit.firstspirit.ui.operations</code>, FirstSpirit Developer API).</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Triggering a preview update via API (SiteArchitect and ContentCreator)”.</p> | ContentCreator, FirstSpirit API, SiteArchitect | 5.2.615, 5.2R7 |



| ID | Description | Categories | Version |
|--------|--|---|-------------------|
| 138212 | <p>The filter and sorting functionality for datasets has been extended in SiteArchitect. Not released datasets in the tab “Current datasets” and deleted datasets in the tab “Released datasets” can now be identified more quickly.</p> <p>Further information can be found in chapter “SiteArchitect: Extended Filter and Sorting Functionality for Datasets”.</p> | Content Store, Editor, SiteArchitect, Table templates | 5.2R3 |
| 140134 | Restoring a deleted dataset with the input component FS_LIST (DATABASE type) may have failed with an error message. | Input Components, SiteArchitect | 5.2R4 |
| 144895 | <p>Improved editing of multiple packages.</p> <p>Further information can be found in chapter “Modules: Corporate Content: Editing multiple packages”.</p> | Corporate Content, Developer, Modules, SiteArchitect | 5.2R4 |
| 150087 | <p>For improved consistency, the title text that may be set for a dialog via the method <code>setTitle(String title)</code> of the interface <code>ShowFormDialogOperation</code> (package <code>de.espirit.firstspirit.ui.operations</code>, FirstSpirit Developer API) is now also used for the dialog's main title.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: ContentCreator: Use of “setTitle” for a dialog's main title”.</p> | ContentCreator, FirstSpirit API | 5.2.611, 5.2R7 |
| 151301 | In the functionality “FirstSpirit CorporateContent”, optimized update behavior of content in entries of the input component FS_LIST (type INLINE). | Corporate Content | 5.2R4 |
| 151536 | Editing a restored section may have resulted in a malfunction. | ContentCreator | 5.2R3 |
| 152068 | Exporting a database schema including its current data could lead to erroneous behavior. | Content Store, SiteArchitect, Template Store | 5.2R3 |
| 156047 | In rare cases some selection dialogues were rendered incorrectly. | SiteArchitect | 5.2R19 |



| ID | Description | Categories | Version |
|--------|--|--|-------------------|
| 156177 | <p>The interface <code>Executable</code> has been improved.</p> <p>Further information can be found in chapter "Module Development, Scripts, API: Interface "Executable" (package "de.e-spirit.firstspirit.access.script") improved".</p> | Developer, FirstSpirit API | 5.2R13 |
| 157668 | Within the FS_LIST (PAGE type) input component, an empty check (EMPTY property) has been optimized for rules. | Dynamic Forms, SiteArchitect | 5.2R2 |
| 157715 | If certain prerequisites were met, erroneous behavior could occur when creating a table template after integrating an external database. | Database, Table templates | 5.2R4 |
| 158311 | The page status display, reached via the ContentCreator toolbar, erroneously displayed the most recent editor and the most recent release date of the page reference, not of the page element. | ContentCreator | 5.2R5 |
| 158656 | <p>So called "Pluggability" features (Java Servlet Specification 3.0) can be disabled starting with the current FirstSpirit version.</p> <p>Further information can be found in chapter "Administration: Apache Tomcat / Java Servlet Specification 3.0: Disabling Pluggability features".</p> | FirstSpirit Administrator, ServerManager | 5.2.611, 5.2R7 |
| 160553 | Optimized stop/restart process of web applications when using Apache Tomcat 8 as web server. | FirstSpirit Administrator | 5.2R6 |
| 160781 | In very rare cases, when using server-side release after move operations, already released objects could not be found. | Release | 5.2R4 |
| 160945 | <p>Drag-and-drop of a medium from the Media Store into the local filesystem could lead to erroneous behavior.</p> <p>The launcher has to be updated in order to apply this fix.</p> | Launcher, SiteArchitect | 5.2R9 |
| 161145 | Deleting a dataset which contains a reference to itself could lead to erroneous behavior. | Content Store, SiteArchitect | 5.2R3 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 161179 | In the input component FS_LIST (type INLINE), optimized copy and paste operations of entries between lists via the context menu. | Input Components, SiteArchitect | 5.2R2 |
| 161391 | Via the API, Dataset objects can now only be saved (method <code>save()</code>) if they are locked (e.g. method <code>lock(true)</code>) or the option “Server locks in content store” (ServerManager / Project / Properties / Options) is deactivated. Further information can be found in chapter “Module Development, Scripts, API: Method <code>save()</code> observes the option “Server locks in content store””. | Developer, FirstSpirit API, Template Development | 5.2R2 |
| 161625 | FirstSpirit now supports upload, saving, and deployment of media which contain more than one dot in their file names, e.g. files of type “.tar.gz” or files which carry version information in their names such as “Linux_4.6.4-1.debian.tar.xz”. Further information can be found in chapter “Media: Support for files with more than one dot character in their names”. | ContentCreator, Editor, Input Components, Media Store, Search, SiteArchitect | 5.2R5 |
| 161657 | The selection dialog (for example at FS_REFERENCE and FS_DATASET) has got a new icon. This can be used for opening the selected object in a new workspace. Additionally, the position of opening working spaces has been optimized. Further information can be found in chapter “SiteArchitect: Revised selection dialog and opening new workspaces”. | Editor, SiteArchitect | 5.2R4 |
| 162192 | Using the new method <code>stopMaintenance</code> (FirstSpirit Access API, Package <code>de.espirit.firstspirit.access</code> , Interface <code>AdminService</code>), maintenance mode may be cancelled via the API. Further information can be found in chapter “Module Development, Scripts, API: New Method for Cancelling Maintenance Mode”. | FirstSpirit API, FirstSpirit Administrator | 5.2R3 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 162580 | <p>In SiteArchitect, the selection dialog offers navigation and search functionality which enable quick location of objects which are to be referenced, e.g. images or files from the Media store or page references from the Site Structure store (e.g. input components FS_REFERENCE, FS_LIST, FS_DATASET). In FirstSpirit version 5.2R5, the search interaction pattern in this dialog has been optimized.</p> <p>Further information can be found in chapter “SiteArchitect: Optimization of selection dialog”.</p> | Editor, Search, SiteArchitect | 5.2R5 |
| 162786 | In very rare cases, erroneous behavior could occur during project export. | Project export / import | 5.2R4 |
| 163535 | The way encrypted/protected PDF files are handled has been improved. | Indexing, Search, Security | 5.2R3 |
| 164017 | <p>Due to different handling of Berkeley DB V5 (“FirstSpirit ServerManager / Project Properties / Repository / Backend”) in FirstSpirit versions 5.1 and 5.2, the repository of each project must first be configured to use Berkeley DB V3 before a downgrade from FirstSpirit version 5.2 to version 5.1 can be conducted.</p> <p>Further information can be found in chapter “Compatibility: Downgrade to FirstSpirit 5.1 when using Berkeley DB V5”.</p> | FirstSpirit Administrator, ServerManager | 5.2R3 |
| 164464 | When using an IBM DB2 database, modifying foreign key relationships could lead to erroneous behavior. | Content Store, Database | 5.2R3 |
| 165246 | In the input component FS_LIST (type INLINE), optimized editing an entry in a separate window. | Input Components, SiteArchitect | 5.2.515, 5.2R6 |
| 165595 | <p>From the current version of FirstSpirit onwards, the use of language-dependent input components within a language-dependent FS_CATALOG input component will be disallowed by default.</p> <p>Further information can be found in chapter “Input components: FS_CATALOG: Nesting of language-dependent input components”.</p> | ContentCreator, Developer, Editor, FirstSpirit API, FirstSpirit Administrator, Input Components, ServerManager, SiteArchitect | 5.2R5 |



| ID | Description | Categories | Version |
|--------|--|---|-------------------|
| 165793 | In ContentCreator, optimized performance when selecting media or page references in the input component FS_REFERENCE. | ContentCreator, Input Components, Performance | 5.2R4 |
| 166031 | The validation behavior for the input component FS_LIST (type DATABASE) operating in “Mediamode” has been optimized. | ContentCreator, Dynamic Forms | 5.2.515, 5.2R6 |
| 167345 | Optimized search. | ContentCreator, Search | 5.2R4 |
| 167503 | Making a change in the database schema for an existing table (i.e., creating a new column) may have resulted in a malfunction when maintaining data in the data source. | Content Store, Developer, Template Development | 5.2R2 |
| 167578 | From FirstSpirit version 5.2R3 onward, individual web app components can now also be added to global web apps (BETA!). Further information can be found in chapter “Module Development, Scripts, API: Individualizing the global FirstSpirit web applications (BETA!)”. | Developer, Module development, Server-Manager | 5.2R3 |
| 167686 | When adding folders to the Media store using drag-and-drop, the folders' display names will now automatically be set. | Media Store, SiteArchitect | 5.2R4 |
| 167750 | Project exports can now be reduced by excluding pre-calculated image resolutions. Further information can be found in chapter “Administration: Reduce project exports by excluding pre-calculated image resolutions”. | FirstSpirit Administrator, Project export / import, ServerManager | 5.2R2 |
| 167794 | The process of preselecting the referenced dataset in the selection dialog of the FS_DATASET input component has been improved. | Content Store, Input Components, SiteArchitect | 5.2R2 |
| 168157 | Under certain conditions (a node has been moved and modified at the same time in the source project), nodes were not updated correctly in the target project. | Content Transport, SiteArchitect | 5.2R3 |



| ID | Description | Categories | Version |
|--------|--|---|----------------|
| 168345 | The storage behavior for archiving system files (“Archive old project states” schedule) has been optimized. | Archiving | 5.2R3 |
| 168389 | New list entries in FS_LIST (DATABASE and INLINE types), FS_CATALOG, and FS_INDEX can now be created directly from the preview in ContentCreator via FS_BUTTON. Further information can be found in chapter “ContentCreator: Create new list items using the FS_BUTTON”. | ContentCreator, Developer, Editor, Template Development | 5.2R2 |
| 168598 | In FirstSpirit version 5.2R2 and higher, proxy authentication based on Kerberos/SPNEGO or NTLM is supported through HTTP. Further information can be found in chapter “Administration: Proxy authentication via Kerberos/SPNEGO or NTLM”. | FirstSpirit Administrator, Security | 5.2R2 |
| 169017 | In an integrated preview using Internet Explorer as browser, opening external links in a separate window could lead to erroneous behavior. | Preview, SiteArchitect | 5.2R2 |
| 169756 | Optimized copying of content into the FirstSpirit clipboard via the keyboard shortcut <code>Ctrl + C</code> . | Clipboard, SiteArchitect | 5.2.518, 5.2R6 |
| 169828 | When indexing individual datasets via script from within a schedule task using the method <code>rebuildSearchIndex(IDProvider element)</code> of the interface <code>ProjectStorage (Access API, package de.espirit.firstspirit.access.admin)</code> , occasionally, individual datasets were not correctly indexed. | FirstSpirit API, Server Administrator, Tasks | 5.2R4 |
| 169853 | As of the current FirstSpirit version, the software used internally for integrated preview has been updated. Further information can be found in chapter “SiteArchitect: Integrated preview: Updated third-party software”. | Integrated software, Preview, SiteArchitect | 5.2R7 |



| ID | Description | Categories | Version |
|--------|---|--|----------------|
| 170093 | <p>You can use the method <code>getModifiedProjectProperties()</code> of the interface <code>ImportOperation.Result</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.store.access.nexport.operations</code>), which has been introduced with FirstSpirit version 5.2R4, to identify if and which type of project settings were imported (for example template sets).</p> <p>Further information can be found in chapter “External Synchronization: New method "getModifiedProjectProperties" returns imported project properties”.</p> | External synchronization | 5.2R4 |
| 170102 | <p>In ContentCreator, the height of the input component “Link-Sensitive Graphic” (<code>CMS_INPUT_IMAGE_MAP</code>) can now be adjusted.</p> <p>Further information can be found in chapter “ContentCreator: Stepless Resizing of the Input Component "Link-Sensitive Graphic" (<code>CMS_INPUT_IMAGE_MAP</code>)”.</p> | ContentCreator, Editor, Input Components | 5.2R3 |
| 170286 | Optimized clean-up of technical sessions which were established via remote projects. | Server Administrator | 5.2R3 |
| 170628 | Optimized selection dialog of the input component <code>FS_LIST</code> (type <code>DATABASE</code>). | Input Components, SiteArchitect | 5.2R4 |
| 170828 | <p>The “Overview” tab view in the Template Wizard can now be configured.</p> <p>Further information can be found in chapter “Template Wizard: Configure overview”.</p> | Developer, Template Development, Template Wizard | 5.2R2 |
| 171040 | Improved visualization of changes in version comparison. | SiteArchitect, Version history | 5.2.611, 5.2R7 |
| 171052 | <p>In external synchronization, optimized content of the file <code>Info.txt</code> for media.</p> <p>This file no longer contains resolution information, which is part of global project properties.</p> | External synchronization | 5.2R4 |



| ID | Description | Categories | Version |
|--------|---|---|----------------|
| 171309 | Optimized performance when adding elements to Corporate-Content packages. | Corporate Content, FirstSpirit Administrator, ServerManager | 5.2R3 |
| 171361 | The new “Follow links” checkbox can be used to configure “Crawling” for the “Template Wizard” function. Further information can be found in chapter “Template Wizard: Activate/deactivate crawling”. | Developer, Template Development, Template Wizard | 5.2R2 |
| 171374 | Improved handling of folders with identical names in the External Synchronization user interface. | External synchronization, SiteArchitect | 5.2R3 |
| 171470 | Restoring revisions resulted in a malfunction on pages if the child list had been changed by means of a previous restoration process. | Page Store, SiteArchitect | 5.2R3 |
| 171504 | The default value for the <code>sendAccepted</code> parameter when using the Kerberos login module has been changed. Further information can be found in chapter “Administration / Modules: Log in via Kerberos ticket “KerberosLoginModule”)”. | FirstSpirit Administrator, Modules | 5.2R2 |
| 171607 | Within the FS_LIST (INLINE type) component, the deletion of an entry from the list was not identified as a change even though it should have been. | Editor, Input Components, SiteArchitect | 5.2R2 |
| 171819 | When using Oracle databases, archiving datasets could cause erroneous behavior. | Archiving | 5.2.615, 5.2R7 |
| 172022 | If a web server has been configured incorrectly, the installation of a web application on the server is now prevented. | FirstSpirit Administrator, ServerManager | 5.2R3 |
| 172071 | Revised the set of privileges required to modify menu order. | Permissions, Site Store, SiteArchitect | 5.2R2 |
| 172092 | Deletion of objects in one project will now be correctly regarded during an import into other projects. This also affects “FirstSpirit ContentTransport”. Further information can be found in chapter “External Synchronization: Import: Deletion of objects”. | Content Transport, External synchronization | 5.2R14 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 172243 | Resource limit settings (<i>ulimit</i>) now remain unchanged when the FirstSpirit server is started. | FirstSpirit Administrator | 5.2R4 |
| 172275 | <p>Template Wizard: New functionality for detecting and merging differences between content which has already been edited and imported.</p> <p>Further information can be found in chapter “Template Wizard: Detecting and merging changes”.</p> | Developer, Template Development, Template Wizard | 5.2R2 |
| 172371 | Optimized rule evaluation (functionality “Dynamic Forms”) for languages of a form that haven't been displayed yet. | Dynamic Forms, SiteArchitect | 5.2R2 |
| 172511 | In templates, optimized display of editable tables in the “Properties” tab (e.g., page templates / tab “Properties” / tab “General” / table “File extension”). | SiteArchitect, Template Development, Template Store | 5.2R3 |
| 172660 | <p>The version comparison dialog has been updated. It now also provides the option to “merge” differences between revisions.</p> <p>Further information can be found in chapter “SiteArchitect: Revised version comparison”.</p> | Developer, SiteArchitect, Template Development | 5.2R2 |
| 172713 | The “Add column” pop-up dialog in the data source overview has been optimized. | Content Store, SiteArchitect | 5.2R2 |
| 172802 | <p>The FS_INDEX input component has been expanded to allow access to the value set.</p> <p>Further information can be found in chapter “SiteArchitect / ContentCreator: Access to FS_INDEX value set”.</p> | ContentCreator, Developer, SiteArchitect, Template Development | 5.2R2 |
| 172813 | The process of scaling the thumbnails in the detail and symbol display modes (<code>viewMode="DETAILS"</code> and <code>viewMode="SYMBOLS"</code>) in the FS_INDEX input component has been improved. | ContentCreator, Input Components, SiteArchitect | 5.2R2 |
| 172842 | When selecting a file in the media selection dialog, it no longer matters whether the file extension is written in uppercase or lowercase letters. | Media Store, SiteArchitect | 5.2R2 |



| ID | Description | Categories | Version |
|--------|--|--|----------------|
| 172878 | In the “Extras” menu item, evaluation of the “Show preview errors” setting has been improved. | Preview, SiteArchitect | 5.2R5 |
| 172892 | <p>The options for code completion in templates have been expanded.</p> <p>Further information can be found in chapter “SiteArchitect: Optimizing code completion in templates”.</p> | Developer, SiteArchitect, Template Development | 5.2R2 |
| 172915 | When creating language-dependent media via drag-and-drop from another language, the file was erroneously not transferred from the source language. | Media Store, SiteArchitect | 5.2R2 |
| 173046 | <p>The newly-added interface <code>SelectOptionOperation</code> (FirstSpirit Developer API) allows developers to use a light-weight dropdown menu for selection of a value within the ContentCreator preview.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: ContentCreator: Using dropdown menus via API”.</p> | ContentCreator, Developer, FirstSpirit API | 5.2R5 |
| 173051 | <p>The content of input components can be checked in rules with a regular expression (matches).</p> <p>The regular expression can be used to check whether the editor has included at least one character which is not the equivalent of a whitespace character (blank space, tab space, etc.).</p> <p>A problem could occur during a check of this type if the editor had never made changes to an input component.</p> | Dynamic Forms, SiteArchitect | 5.2R2 |
| 173112 | Dynamic forms now allow canceling of rules evaluation related to complex, long-running rulesets. | Dynamic Forms, SiteArchitect | 5.2R2 |
| 173120 | When the internal Jetty engine was used as servlet engine, an error message could be written to the log files during server shutdown. | Server Administrator | 5.2.422, 5.2R5 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 173139 | In the current version of FirstSpirit, the version of the Apache FOP used internally was updated from 1.1 to 2.2. Further information can be found in chapter “System: Updating Apache FOP”. | Integrated software | 5.2R14 |
| 173167 | Within the FS_LIST (DATABASE type) input component, the selection view has been optimized in the selection dialog. | Input Components, SiteArchitect | 5.2R2 |
| 173191 | In terms of the “Enterprise Backup” functionality, license evaluation has been optimized for the purpose of creating a schedule. | Backup, FirstSpirit Administrator, Server-Manager | 5.2R2 |
| 173200 | In the case of using the <code>ref()</code> function on a nonexistent folder, the generation process now involves recording missing references as information (“INFO” log level) rather than errors (“ERROR” log level). | FirstSpirit Administrator, Generation | 5.2R2 |
| 173287 | Projects are now protected against simultaneous editing by several developers using the “FirstSpirit Template Wizard” function. Further information can be found in chapter “Template Wizard: Protection against simultaneous project editing”. | Developer, SiteArchitect, Template Development, Template Wizard | 5.2R2 |
| 173326 | The pop-up dialog for searching in database tables incorrectly remained in the foreground when you switched to another application outside the FirstSpirit environment. | Content Store, Search, SiteArchitect | 5.2R2 |
| 173352 | The table view when editing datasets has been optimized. | Content Store, SiteArchitect | 5.2R2 |
| 173417 | Security improvements when starting SiteArchitect and ContentCreator. | ContentCreator, Security, SiteArchitect | 5.2R2 |
| 173480 | Sections can now also be moved into other content areas in ContentCreator. Further information can be found in chapter “ContentCreator: Move sections into other content areas”. | ContentCreator, Developer, Editor | 5.2R2 |



| ID | Description | Categories | Version |
|--------|---|---|---------|
| 173546 | A meaningful error message is now displayed when trying to delete the source section of a section reference. | ContentCreator, Editor | 5.2R2 |
| 173605 | In “FirstSpirit ContentTransport”, import and export of project properties require at least project administrator privileges, import of server properties requires server administrator privileges. Attempting to create a feature as a standard user without the privilege levels indicated above could lead to erroneous behavior. | Content Transport, Security | 5.2R3 |
| 173612 | After removing an entry from an index (input component FS_INDEX), switching to another project language of the form and then saving the form could lead to erroneous behavior. | ContentCreator, Input Components | 5.2R2 |
| 173711 | Improved performance of importing media with many resolutions. | Content Transport | 5.2R4 |
| 173725 | In FirstSpirit version 5.2R3, a number of new interfaces and methods for implementing personal schedule actions have been included in the FirstSpirit Developer API. Further information can be found in chapter “Module Development, Scripts, API: New interfaces and methods for implementing personal schedule actions”. | Developer, FirstSpirit API, Generation, Tasks | 5.2R3 |
| 173745 | Implemented measures to improve security in FirstSpirit ServerMonitoring as well as in FirstSpirit web applications. Further information can be found in chapter “Administration: Security improvements in FirstSpirit ServerMonitoring and web applications”. | FirstSpirit Administrator, ServerMonitoring | 5.2R2 |
| 173790 | Downloading the log files may have resulted in a malfunction in ServerMonitoring. | FirstSpirit Administrator, ServerMonitoring | 5.2R2 |
| 173802 | The description was not always included for the resolution under the project properties. | FirstSpirit Administrator, ServerManager | 5.2R2 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 173805 | Simplified creation of new entries in FS_CATALOG in SiteArchitect. Further information can be found in chapter "SiteArchitect: Simplified Creation of Entries in FS_CATALOG". | Editor, Input Components | 5.2R4 |
| 173823 | The language switching behavior for the input component FS_CATALOG has been optimized. | Input Components, SiteArchitect | 5.2R3 |
| 173851 | After importing a project with historic schedule task data, the history was not taken into account during server shutdown, causing the task history to be unavailable once the server was started again. | FirstSpirit Administrator, Project export / import, Server-Manager, Tasks | 5.2R2 |
| 173860 | The browser integration for modules has been improved. | Modules, Preview, SiteArchitect | 5.2R2 |
| 173875 | A meaningful error message is now displayed if a section is supposed to be created on a single page in ContentCreator via drag-and-drop, but another user has just edited it. | ContentCreator | 5.2R2 |
| 173952 | Navigating to an HTML anchor element after refreshing the preview could lead to erroneous behavior. | ContentCreator, Preview | 5.2R2 |
| 173955 | If the "Filterable" aspect of a Data Access Plug-In defines more than one parameter with the same name, only the first provided parameter with that name will now be used. Further information can be found in chapter "Module Development, Scripts, API: Changed Behavior for Data Stream Builder Implementations With Aspect "Filterable"". | Developer, FirstSpirit API, Template Development | 5.2R2 |
| 174000 | Optimized behavior when cropping media elements of type Picture multiple times in a row. | Media Store, Services, SiteArchitect | 5.2R2 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 174004 | <p>Some methods in the Content2 (FirstSpirit Access API, <code>de.espirit.firstspirit.access.store.contentstore</code> package) have been discontinued ("Deprecation") and can be omitted in the next FirstSpirit major version (6.0).</p> <p>Further information can be found in chapter "Module Development, Scripts, API: Discontinuation ("Deprecation") of methods for the "Content2" interface".</p> | Developer, FirstSpirit API, Module development, Template Development | 5.2R2 |
| 174020 | In the input component FS_INDEX, clicking on an invalid reference in the snippet view may have resulted in a malfunction. | Input Components, SiteArchitect | 5.2R3 |
| 174052 | The template set for preview viewports has been taken into more careful consideration in the "Multi Perspective Preview" function. | Multi Perspective Preview, SiteArchitect | 5.2R2 |
| 174055 | Media type and size restrictions have been taken into more careful consideration in the selection dialog when uploading media. | Media Store, SiteArchitect | 5.2R2 |
| 174176 | When copying a dataset in a data source where a workflow was in progress, the workflow status was erroneously transferred. | Content Store, SiteArchitect, Workflow | 5.2R2 |
| 174208 | In the schema editor, the XML file of the database schema will now be correctly updated when deleting relations. | Developer, Template Development | 5.2R2 |
| 174255 | The way version comments for datasets are handled has been optimized. | Content Store, SiteArchitect, Version history | 5.2R3 |



| ID | Description | Categories | Version |
|--------|--|--|-------------------|
| 174265 | <p>Deprecated the methods <code>addStartNode(IDProvider)</code> and <code>removeStartNode(IDProvider)</code> in the interface <code>Package</code> (FirstSpirit Access API, package <code>de.espirit.firstspirit.access.packagepool</code>). These methods may be removed from the Access API with the next major FirstSpirit version (6.0).</p> <p>Nodes may be added to and removed from a “Package” object (supplied as a parameter) by using the methods <code>addToPackage(Package)</code> and <code>removeFromPackage(Package)</code>, respectively, of the interface <code>PackagePoolItem</code> (FirstSpirit Access API, package <code>de.espirit.firstspirit.access.store</code>). All objects which may be added to a Corporate Content package implement this interface.</p> | Corporate Content, Developer, FirstSpirit API | 5.2R3 |
| 174281 | After installation, the option to use the launcher was not activated in the connection settings. | Launcher | 5.2R2 |
| 174297 | Navigation in the server/project properties using the arrow keys (or “cursor keys”) has been optimized. | FirstSpirit Administrator, ServerManager, Tasks | 5.2R2 |
| 174304 | The full-text search has been improved with regard to longer search texts. | Search, SiteArchitect | 5.2R3 |
| 174319 | The process of reading out the FS_INDEX input component into table templates has been optimized. | ContentCreator, Developer, SiteArchitect, Template Development | 5.2R2 |
| 174427 | <p>As of the current FirstSpirit version, signing of FirstSpirit JAR files is carried out using SHA-256.</p> <p>Further information can be found in chapter “System: Signing with SHA-256”.</p> | FirstSpirit Administrator | 5.2.615, 5.2R7 |
| 174484 | Optimized the selection view in the selection dialog (tab “Selection”) for the input component FS_LIST. | Input Components, SiteArchitect | 5.2R4 |



| ID | Description | Categories | Version |
|----------------------------|---|---|---------|
| 174628 154885 172636 | <p>For the “FirstSpirit Template Wizard”, “FirstSpirit Template Debugger”, and “FirstSpirit Template Inspection”, permissions can now be granted so that these tools can now only be accessed by certain user groups.</p> <p>Further information can be found in chapter “Administration: Permissions for FirstSpirit modules (Template Wizard, Template Debugger, Template Inspection)”.</p> | Developer, FirstSpirit Administrator, Permissions, ServerManager, SiteArchitect, Template Debugger, Template Wizard | 5.2R2 |
| 174667 | <p>E-mails are now no longer sent automatically if the license has expired.</p> <p>Further information can be found in chapter “Administration: Expired license warning”.</p> | FirstSpirit Administrator, License | 5.2R2 |
| 174793 | Optimized "Select project" page of the Template Wizard's project creation/loading dialog. | SiteArchitect, Template Development, Template Wizard | 5.2R2 |
| 174865 | Optimized visualization of elements which are included in a CorporateContent package. | Corporate Content, SiteArchitect | 5.2R4 |
| 174896 | In a workflow, performing a release after a state change triggered via a script in an automatic activity could lead to erroneous behavior. | SiteArchitect, Workflow | 5.2R2 |
| 174962 | Optimized error handling when starting a workflow which contains an error state. | SiteArchitect, Workflow | 5.2R2 |
| 175012 | When double clicking the resolution of an image in the Media store of SiteArchitect, the corresponding image preview will now be displayed again. | Media Store, SiteArchitect | 5.2R2 |
| 175016 | Uploading a media file which failed media restriction checks could lead to erroneous behavior. | Media Store, SiteArchitect | 5.2R2 |
| 175020 | <p>New FirstSpirit login facility via the HTTP request header (“RequestHeaderLoginModule”)</p> <p>Further information can be found in chapter “Administration: Log in via the HTTP request header (“RequestHeaderLoginModule”)”.</p> | FirstSpirit Administrator | 5.2R2 |



| ID | Description | Categories | Version |
|--------|---|---|---------|
| 175039 | The function “Show usages” on an element could lead to errors when the referenced objects came from a remote project and the user had no rights in that project. | Permissions, SiteArchitect | 5.2R4 |
| 175107 | Optimized generation of details flyouts for report entries. | ContentCreator | 5.2R2 |
| 175177 | Optimized version comparison for subforms. | SiteArchitect | 5.2R2 |
| 175181 | The group/user combo box is now sorted alphabetically in the dialog for configuring the workflow permissions. | Developer, Permissions, Workflow | 5.2R2 |
| 175186 | Optimized clearing of inline formatting in the rich text editor (input component CMS_INPUT_DOM). | ContentCreator, Input Components | 5.2R2 |
| 175189 | The process of displaying rule violations in subforms (e.g., a link form in the CMS_INPUT_LINK input component) has been optimized. | Dynamic Forms, Input Components, SiteArchitect | 5.2R2 |
| 175223 | After closing a ServerManager dialog when using a Mac OS X operating system, the main window was not always in focus. | Server Administrator, ServerManager | 5.2R2 |
| 175247 | <p>Methods for determining the absolute path to the schedule entry directory</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Methods for determining the absolute path to the schedule entry directory”.</p> | Developer, FirstSpirit API, Generation | 5.2R2 |
| 175252 | <p>In order to comfortably perform updates of modules which include project or web application components, ServerManager provides the button “Update uses” under “Server / Properties / Modules”.</p> <p>Erroneously, not all changes were regarded after updating a module and updating uses of module components.</p> | Modules, Server-Manager | 5.2R3 |
| 175380 | Performance improvements in the area SiteArchitect. | SiteArchitect | 5.2R3 |
| 175399 | Creating a new dataset by copying data from an existing dataset could lead to erroneous behavior if the form contained the input component CMS_INPUT_DOM. | Content Store, ContentCreator, Input Components | 5.2R2 |



| ID | Description | Categories | Version |
|------------------|--|--|-------------------|
| 175454 176337 | Improved support of input components FS_CATALOG and FS_INDEX in subforms. | Input Components, SiteArchitect | 5.2R2 |
| 175462 | <p>Modules with required missing references to other modules are now visualized appropriately in FirstSpirit ServerManager and can be uninstalled from the FirstSpirit Server without leaving any traces.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Handling dependent modules”.</p> | FirstSpirit Administrator, Module development, Server-Manager | 5.2R2 |
| 175504 | Improved performance in aspects of external synchronization. | External synchronization, SiteArchitect | 5.2R2 |
| 175523 | In “External Synchronization”, improved handling of invalid form elements and erroneous rule definitions. | External synchronization | 5.2R4 |
| 175576 | <p>The performance of the “external synchronization” function has been optimized when adding elements via the user interface.</p> <p>Further information can be found in chapter “External Synchronization: Optimized performance”.</p> | Developer, External synchronization, SiteArchitect, Template Development | 5.2R2 |
| 175578 | Longer periods of inactivity could lead to erroneous behavior when requesting the FirstSpirit start page. | Webstart | 5.2.424, 5.2R5 |
| 175593 | Logging of the ContentCreator may have resulted in a malfunction when using the “FirstSpirit DynamicPersonalization” module. | ContentCreator, Modules | 5.2R2 |
| 175594 174750 | The FirstSpirit Launcher functions have been improved. | Launcher, SiteArchitect | 5.2R2 |
| 175636 | Importing a project export, which has been created with FirstSpirit version 5.0R4 or lower, may have resulted in a malfunction in URLs for individual datasets. | FirstSpirit Administrator, Project export / import | 5.2R2 |
| 175662 | Optimized interaction pattern when executing workflows with automatic actions on multiple objects. | SiteArchitect, Workflow | 5.2.615, 5.2R7 |



| ID | Description | Categories | Version |
|--------|---|---|----------------|
| 175832 | <p>As of the current FirstSpirit version, connections for schedule task scripts can also be established via API (interface <code>ScriptTask</code>, package <code>de.espirit.firstspirit.access.schedule</code>, FirstSpirit Access API).</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Establishing connections via API in schedule task scripts”.</p> | Developer, FirstSpirit API, Tasks | 5.2.515, 5.2R6 |
| 175841 | <p>FirstSpirit version 5.2R3 introduces the new interfaces <code>OpenComparisonDialogOperation</code> and <code>OpenMergeDialogOperation</code> (both in the package <code>de.espirit.firstspirit.ui.operations</code>, FirstSpirit Developer-API).</p> <p>Further information can be found in chapter “Module Development, Scripts, API: New Interfaces to Open Version Comparison and Merge Dialogs”.</p> | Developer, FirstSpirit API, SiteArchitect | 5.2R3 |
| 175850 | The display for the design elements (<code>CMS_LABEL</code> or <code>CMS_GROUP</code>), which is controlled by rules, has been improved. | ContentCreator, Dynamic Forms, Input Components | 5.2R2 |
| 175868 | Optimized interaction pattern when cancelling a workflow. | ContentCreator | 5.2.518, 5.2R6 |
| 176035 | Optimized output of nested levels in <code>FS_INDEX</code> input components. | Developer, SiteArchitect, Template Development | 5.2R2 |
| 176065 | In the <code>CMS_INPUT_IMAGE_MAP</code> input component, the display of remote media has been optimized. | ContentCreator, Input Components | 5.2R2 |
| 176138 | <p>The sending of an e-mail to a list of users or user groups has been improved in a workflow.</p> <p>Further information can be found in chapter “SiteArchitect: Configuring e-mail messaging in workflows”.</p> | Developer, SiteArchitect, Workflow | 5.2R2 |
| 176147 | Optimized editing of metadata on the root node of the Site Structure store. | ContentCreator, Site Store | 5.2R3 |



| ID | Description | Categories | Version |
|--------|---|---|---------|
| 176213 | Deleting an entry with a rule violation in the FS_CATALOG input component, may have resulted in a malfunction. | Dynamic Forms, Input Components, SiteArchitect | 5.2R2 |
| 176253 | Log messages generated by SiteArchitect and Server-Manager will now be stored in separate files on the client workstation of the respective user. Additionally, the current logging may be observed in a separate log window. Further information can be found in chapter “SiteArchitect / ServerManager: Client Logging”. | Developer, SiteArchitect, Webstart | 5.2R7 |
| 176262 | When populating an FS_INDEX input component via drag and drop from a report, restrictions imposed by the rule property “ADD” were not taken into account. | Dynamic Forms, Input Components, SiteArchitect | 5.2R2 |
| 176290 | The process of updating the detail page of a content projection in the integrated preview when editing a dataset has been optimized. | Content Store, Preview, SiteArchitect | 5.2R2 |
| 176373 | Due to a change in the FirstSpirit Developer API, any special modules that you have created yourself and that use the <i>PreviewParameter</i> (package <i>de.espirit.firstspirit.client.mpp</i>) interface must be recreated after upgrading to FirstSpirit version 5.2R2. Further information can be found in chapter “Module Development, Scripts, API: General information”. | Developer, FirstSpirit API, Module development | 5.2R2 |
| 176533 | The process of generating content from an FS_INDEX input component in a nested structure has been improved. | Developer, Generation, Input Components | 5.2R2 |
| 176643 | Improved display of mappings in table templates for projects with many languages. | Developer, SiteArchitect, Table templates, Template Development | 5.2R2 |
| 176678 | Optimized rendering of the input components FS_CATALOG and FS_INDEX. | SiteArchitect | 5.2R16 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 176937 | Capitalization is no longer taken into consideration when performing global searches in the “Search in templates” system filter. | Search, SiteArchitect | 5.2R2 |
| 176953 | In “Content Transport” functionality, installing a feature could lead to erroneous behavior if the feature contained the project property “Schedule entries”, wherein one of the schedule entries referenced an action template. | Content Transport | 5.2R3 |
| 176956 | In “Content Transport” functionality, optimized interaction pattern for assembly of features that should only contain project properties. | Content Transport | 5.2R3 |
| 177110 | The <code>getHeight()</code> method from the “MappingMedium” interface (Access API, <code>de.espirit.firstspirit.access.editor.value</code> package) has been optimized. | Developer, SiteArchitect, Template Development | 5.2R2 |
| 177127 | Optimized output of inherited variable values of a menu level in the Site Structure store. | Site Store, SiteArchitect | 5.2R2 |
| 177182 | Recalculation of references is now supported for individual elements using the new API object <code>ProjectReference-sAgent</code> . Further information can be found in chapter “Module Development, Scripts, API: Recalculation of references for individual elements via <code>ProjectReferencesAgent</code> ”. | Developer, FirstSpirit API | 5.2R3 |
| 177304 | Disabling the “Delete” icon for the input component <code>FS_LIST</code> (no <code><ACTION name="REMOVE" /></code> defined) was erroneously not observed in ContentCreator. | ContentCreator, Input Components | 5.2R5 |
| 177311 | In ContentCreator, adding new media to a folder could lead to erroneous behavior if the project's master language was not configured to be used as an editorial language. | ContentCreator, Media Store | 5.2R5 |
| 177323 | In rare cases, specific configurations of <code>FS_REFERENCE</code> could lead to erroneous behavior in ContentCreator: in such cases, not all elements eligible for selection were displayed. Further information can be found in chapter “ContentCreator: Filter in <code>FS_REFERENCE</code> via <code><SOURCES></code> ”. | ContentCreator, Developer, Input Components | 5.2R3 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 177465 | Links without link text in the CMS_INPUT_DOM input component may have resulted in a malfunction within the indexing process. | FirstSpirit Administrator, Indexing, Input Components | 5.2R2 |
| 177500 | The FS_LIST (DATABASE type) input component was liable to malfunctions when using language-independent input components in the internal form in conjunction with rules. | Dynamic Forms, Input Components, SiteArchitect | 5.2R2 |
| 177621 | In very rare instances, the defined rules (“Dynamic forms” functionality) were erroneously not taken into account in a data source. | Content Store, Dynamic Forms, SiteArchitect | 5.2R3 |
| 177696 | For a project, several remote projects can be configured that all have the same remote category. In an error case (e.g. if a remote project was deleted), the error message now mentions the symbolic name of the project in question when saving the remote configuration of an input component (e.g. FS_REFERENCE, tag <CATEGORY>). | Remote access, SiteArchitect | 5.2R12 |
| 177836 | An external group may be used on a FirstSpirit server in order to assign server administrator privileges to this group (user settings, attribute “Server Administrator”). Furthermore, it is possible to prohibit the server administrator (user “Admin”) to perform editorial activities in a project (i.e. to open a project). Erroneously, this prohibition was also applied to users with server administrator privileges. | Corporate Content, Editor, Permissions, Server Administrator, SiteArchitect | 5.2R3 |
| 177904 | Starting a workflow on a dataset could cause the dataset to lose focus. | Content Store, Workflow | 5.2R3 |
| 177926 | In the input component CMS_INPUT_DOMTABLE (enableImport=“yes” option), inserting content from Microsoft Excel may have resulted in a malfunction. | Clipboard, Input Components, SiteArchitect | 5.2R3 |



| ID | Description | Categories | Version |
|--------|---|--|---------|
| 178089 | <p>As of FirstSpirit version 5.2R5, source code packages are available that contain example modules for integration of external data sources in FirstSpirit using generic DataAccess-Plugins.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Examples for integration of external data sources using generic DataAccessPlugins”.</p> | Developer, FirstSpirit API, Module development | 5.2R5 |
| 178142 | <p>Pressing Ctrl and hovering the mouse cursor over template code now visualizes referenced FirstSpirit elements while Ctrl+ KCLICK jumps to the referenced element.</p> <p>Further information can be found in chapter “SiteArchitect: Jumping to References in Template Code”.</p> | Developer, Template Development, Template Store | 5.2R9 |
| 178271 | The ability for several users to edit a dataset in parallel has been optimized. | Content Store, SiteArchitect | 5.2R2 |
| 178279 | Editing referenced datasets in nested FS_LIST (type DATABASE) input components could lead to erroneous behavior. | Input Components, SiteArchitect | 5.2R4 |
| 178420 | <p>It is only possible to define a group exclusion in workflows for transitions which point to an activity. From FirstSpirit version 5.2R3 onward, this definition is now also prevented in the GUI for transitions which point to a status.</p> <p>Further information can be found in chapter “SiteArchitect: 'Group exclusion' function for transitions in workflows”.</p> | Developer, Permissions, SiteArchitect, Workflow | 5.2R3 |
| 178503 | Optimized scrolling and loading of entries in reports (data access plug-ins). | Reports, SiteArchitect | 5.2R3 |
| 178506 | Reloading the entries in the selection dialog in the FS_INDEX input component has been optimized. | Input Components, SiteArchitect | 5.2R3 |
| 178566 | Optimized output of nested input component FS_INDEX in snippets. | Corporate Content, Input Components, SiteArchitect, Template Development | 5.2R3 |



| ID | Description | Categories | Version |
|--------|--|---|----------------|
| 178744 | Handling of reports has been improved. | ContentCreator, Editor, Reports, SiteArchitect | 5.2.515, 5.2R6 |
| 150701 | | | |
| 192871 | Further information can be found in chapter “SiteArchitect / ContentCreator: Reports: Handling has been improved”. | | |
| 178799 | When executing the method <code>delete(IDProvider, boolean)</code> (FirstSpirit Access API, package <code>de.espirit.firstspirit.access</code> , class <code>AccessUtil</code>) on a dataset, the data source was deleted erroneously. Now, an error message is generated which states that a dataset cannot be deleted using the method above. | Content Store, Developer | 5.2R3 |
| 178812 | When importing media using “Template Wizard” functionality, the option “Parse file” will now only be activated for files of types “css” and “js”. | Media Store, Template Wizard | 5.2R3 |
| 178853 | Optimized consideration of edit mode when moving sections. | SiteArchitect | 5.2R18 |
| 178858 | When using the functionality “External Synchronization”, the preview page of a template was erroneously not considered after import. | External synchronization | 5.2R4 |
| 178861 | Optimizations related to TLS encryption. | Security | 5.2R3 |
| 178867 | The “Edit image section” dialog in ContentCreator can now be opened via API. Further information can be found in chapter “Module Development, Scripts, API: ContentCreator: Opening the “Edit image section” dialog via API”. | ContentCreator, Developer, FirstSpirit API | 5.2R5 |
| 178879 | Weighting of content in search results may be specified per input component using the parameter <code>searchRelevancy</code> . Further information can be found in chapter “Search: Weighting of Contents in Input Components”. | ContentCreator, Developer, Indexing, Input Components, Search, SiteArchitect, Table templates, Template Development, Template Store | 5.2R3 |



| ID | Description | Categories | Version |
|--------|--|--|-------------------|
| 178954 | In the case of older Mac OS X versions (e.g., 10.7), the internal check of the operating system version in SiteArchitect may have resulted in a malfunction. | SiteArchitect | 5.2R3 |
| 179073 | Optimized validation hints in forms of inner entries of the input component FS_CATALOG. | Dynamic Forms, Input Components, SiteArchitect | 5.2R2 |
| 179075 | In the input component FS_CATALOG, clicking the button “New” (and selecting the desired template, if necessary) now opens the form associated with the new entry so that the editor may directly input the desired content. Further information can be found in chapter “ContentCreator: FS_CATALOG: New Entry Form Is Opened Immediately”. | ContentCreator, Editor, Input Components | 5.2R19 |
| 179095 | Improved indexing of files with file name extensions “html”, “json”, and “php”. | Indexing, Search | 5.2R4 |
| 179099 | For the input component FS_CATALOG, the behavior when creating a new entry and then canceling editing without saving changes has been optimized. | Input Components, SiteArchitect | 5.2R3 |
| 179110 | Creation of duplicate log directories will now be prevented. | FirstSpirit Administrator | 5.2R3 |
| 179124 | In rare cases, selecting a remote object may have resulted in a malfunction. | ContentCreator, Input Components | 5.2R3 |
| 179132 | Optimized search in data sources. | Content Store, Search, SiteArchitect | 5.2R3 |
| 179156 | Optimized editing of contents of the input component CMS_INPUT_DOM within FS_LIST using InEdit functionality. | ContentCreator | 5.2R19 |
| 179200 | The search performance in customer-specific reports (“ReportPlugin”) has been optimized. | ContentCreator, Reports | 5.2R3 |
| 179202 | Optimized default contents of a rule definition after creation of a new template. The editor now initially contains opening and closing <RULES> tags. | Dynamic Forms, Template Development | 5.2.611, 5.2R7 |



| ID | Description | Categories | Version |
|------------------|--|---|---------|
| 179252 | In the “Edit image section” dialog in ContentCreator, rotating or flipping an image section were erroneously not recognized as changes. | ContentCreator, Media Store | 5.2R5 |
| 179283 | In rare cases, searching for datasets in projects which use project archiving may have resulted in an error. | Archiving, FirstSpirit Administrator, Search | 5.2R3 |
| 179426 | In the input component FS_LIST (DATABASE type), the referenced dataset was erroneously marked as changed when an entry was added. | Input Components, SiteArchitect | 5.2R3 |
| 179428 | The global search functionality supports drag and drop of input components onto the search field. For an FS_DATASET input component referencing a certain dataset, search results now include elements which also reference that dataset. | Input Components, Search, SiteArchitect | 5.2R3 |
| 179444 | The response time when editing images in projects with many image resolutions has been improved. | Media Store, SiteArchitect | 5.2R3 |
| 179500 | Saving the configuration of an FS_CATALOG input component without a <TEMPLATES> tag caused display of a Java exception. Now, a concise error message that indicates the missing tag will be displayed. | Input Components, SiteArchitect, Template Development | 5.2R3 |
| 179562 | With newly-created API means, it is now possible to modify <code>FeatureDescriptor</code> objects stored server-side and to save them again. Further information can be found in chapter “Module Development, Scripts, API: Modifying <code>FeatureDescriptor</code> objects stored server-side via API”. | Content Transport, FirstSpirit API | 5.2R12 |
| 179577 | The process of updating the preview has been improved. | ContentCreator, Preview | 5.2R3 |
| 179589 | Optimized behavior when releasing a node which has been restored. | SiteArchitect, Workflow | 5.2R3 |
| 179618 185510 | In the input component CMS_INPUT_COMBOBOX, input of custom values (parameter <code>editable="yes"</code>) could lead to erroneous behavior. | Input Components | 5.2R4 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 179721 | Erroneous behavior could occur during execution of workflow scripts. | ContentCreator, Workflow | 5.2R3 |
| 179811 | When creating a new page, the option “Hide in selection list” for the page template used was erroneously not taken into account. | ContentCreator, Template Store | 5.2R3 |
| 179812 | Optimized thumbnail display during search in the selection dialog of the input component FS_INDEX. | Input Components, SiteArchitect | 5.2R4 |
| 179884 | In FirstSpirit version 5.2R4, updated internally used software. | Database, Integrated software, Launcher, | 5.2R4 |
| 173188 | Further information can be found in chapter “System: Integrated Software”. | Security, Server Administrator | |
| 187062 | | | |
| 179938 | <p>The interface <code>MediaManagementContext</code> in the package <code>de.espirit.firstspirit.webedit.plugin.media</code> (FirstSpirit Developer API) has been extended with new methods.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: ContentCreator: Modify view of the dialog “Manage media” (<code>de.espirit.firstspirit.webedit.plugin.media</code>)”.</p> | ContentCreator, Developer, FirstSpirit API, Media Store | 5.2R7 |
| 179963 | Improved stability of project repository conversion. | Database, FirstSpirit Administrator, Server-Manager | 5.2R4 |
| 179964 | <p>Saving of store elements and datasets can now be triggered programmatically via the API using the new interface <code>SaveOperation</code> (package <code>de.espirit.firstspirit.store.operations</code>, FirstSpirit Access API).</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Saving Elements”.</p> | Developer, FirstSpirit API | 5.2R18 |
| 180031 | Canceling a workflow in ContentCreator immediately after starting it could lead to erroneous behavior. | ContentCreator, Workflow | 5.2R3 |



| ID | Description | Categories | Version |
|------------------|--|---|---------|
| 180073 | Improved the process of populating an FS_REFERENCE input component via drag and drop using a medium from the FirstSpirit clipboard. | Clipboard, Input Components, SiteArchitect | 5.2R4 |
| 180125 180125 | In the language-independent input components FS_CATALOG and FS_LIST (INLINE type), the input components of sections are now highlighted again when checking for TRANSLATED within a rule (“dynamic forms” functionality). | ContentCreator, Dynamic Forms, Input Components | 5.2R3 |
| 180214 | In rare cases, the parameter <code>wrapper.pidfile</code> , set in the configuration file “fs-wrapper.conf”, was not considered in Linux environments. | Server Administrator | 5.2R4 |
| 180217 | In the input component FS_REFERENCE with a filter for data sources (<FILTER> tag with the element type CONTENT2), opening the selection dialog could lead to erroneous behavior. | Input Components, SiteArchitect | 5.2R3 |
| 180270 | Added an icon for refreshing package display. Further information can be found in chapter “Modules: Corporate Content: Refresh package display”. | Corporate Content | 5.2R4 |
| 180416 | The new interface <code>DeleteOperation</code> in the package <code>de.espirit.firstspirit.store.operations</code> (FirstSpirit Developer API) may be used to carry out server-side deletion of FirstSpirit elements and datasets. Further information can be found in chapter “Module Development, Scripts, API: Deleting Elements”. | Developer, FirstSpirit API | 5.2R18 |
| 180469 | Concurrent editing of a dataset by multiple users / in multiple clients could lead to erroneous behavior. | Content Store, SiteArchitect | 5.2R3 |
| 180481 | Performance improvements in the area SiteArchitect / Server-Manager. | ServerManager, SiteArchitect | 5.2R2 |
| 180560 | For page references, optimized display of changes in the version history. | SiteArchitect, Version history | 5.2R5 |
| 180563 | In the input component FS_INDEX, the creation of a new dataset has been improved. | Input Components | 5.2R20 |



| ID | Description | Categories | Version |
|------------------|---|--|---------|
| 180638 | Optimized the user interface of the details view of the input component FS_INDEX: the tabs in the details view will now be reused and visualize an active edit mode. Further information can be found in chapter “SiteArchitect: FS_INDEX: Reuse of tabs in the details view”. | SiteArchitect | 5.2R5 |
| 180640 | In rare cases, modifications were not handled properly in nested FS_LIST input components (type DATABASE). | Input Components, SiteArchitect | 5.2R3 |
| 180661 | Updated the integrated Chrome browser engine “JxBrowser” to version 4.9.5. Further information can be found in chapter “System: Integrated Software”. | Preview, SiteArchitect | 5.2R3 |
| 180679 | When transporting project properties via external synchronization (using the API), updates were occasionally not recognized. | Developer, External synchronization, FirstSpirit API | 5.2R3 |
| 180690 181215 | Performing edits in image galleries (input component FS_LIST, type DATABASE with the tag <MEDIAMODE>) could lead to erroneous behavior. | ContentCreator, Input Components | 5.2R3 |
| 180712 | In the case of the input component FS_CATALOG, the revalidation process when modifying the options “Include this section in the output” (property INCLUDED) or “Page is completely translated to this language” (property TRANSLATED) in subforms has been optimized. | Dynamic Forms, Input Components, SiteArchitect | 5.2R3 |
| 180715 | In the case of the input components FS_CATALOG, FS_LIST (INLINE type), and CMS_INPUT_IMAGE_MAP, the revalidation process when modifying the options “Display or hide section” (property INCLUDED) or “Page is completely translated to this language” (property TRANSLATED) in subforms has been optimized. | ContentCreator, Dynamic Forms, Input Components | 5.2R3 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 180755 | <p>The “Merge” functionality in some tabs of the “Version comparison” dialog is now no longer available or only available with appropriate user privileges.</p> <p>Further information can be found in chapter “SiteArchitect: Selection of revisions for merge”.</p> | Developer, SiteArchitect, Template Development, Version history | 5.2R4 |
| 180825 | <p>The newly-introduced parameter <code>preview.externalDeliveryForwardHttpHeaders</code> (<code>fs-server.conf</code>) defines if, and which, HTTP header fields will be forwarded to the external web server, which is specified by the parameter <code>preview.externalDeliveryURL</code>.</p> <p>Further information can be found in chapter “Administration: Forwarding of HTTP Header Information to an External Preview URL”.</p> | FirstSpirit Administrator, ServerManager | 5.2R3 |
| 180905 | In certain cases, the output of <code>CMS_INPUT_PERMISSION</code> values in templates may have resulted in a malfunction. | Input Components, SiteArchitect | 5.2R3 |
| 180918 | <p>Package <code>de.espirit.firstspirit.ui.gadgets.swing</code> (FirstSpirit Developer-API) extended by the class <code>SwingFormViewMode</code>.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: SwingGadget Development: New Class “SwingFormViewMode””.</p> | Developer, FirstSpirit API, Input Components, Module development, SiteArchitect | 5.2R9 |
| 180923 | Deleting a new dataset which had never been saved may have resulted in a malfunction. | Content Store, SiteArchitect | 5.2R3 |
| 180966 | <p>Media restrictions: Improved identification of file format of media uploaded via drag-and-drop.</p> <p>Further information can be found in chapter “Media: Optimized identification of file format of media uploaded via drag-and-drop”.</p> | ContentCreator, Developer, Editor, Media Store, Server-Manager, SiteArchitect | 5.2R4 |



| ID | Description | Categories | Version |
|----------------------------|---|---|-------------------|
| 181029 | <p>FirstSpirit-Version 5.2R3 includes a bugfix which provides extensive protection against a Java vulnerability in connection with serialization/deserialization.</p> <p>Further information can be found in chapter “Security: Java Vulnerability (Serialization/Deserialization)”.</p> | FirstSpirit Administrator, Module development, Modules, Security | 5.2R3 |
| 181031 | Improved search in log files in ServerMonitoring. | Search, ServerMonitoring | 5.2R5 |
| 181081 | In translation help, improved adoption of content within entries of FS_CATALOG input components. | Input Components, SiteArchitect | 5.2R4 |
| 181290 | Starting a FirstSpirit server could lead to erroneous behavior if the user's home directory could not be written to. | FirstSpirit Administrator | 5.2R3 |
| 181336 | When using the module “FirstSpirit Security”, the FirstSpirit Access Control Database was not created correctly in the web application directory when deploying the WAR file on an external web server (e.g., Tomcat 7). | Developer, FirstSpirit Administrator, Modules | 5.2R3 |
| 181337 | During creation of a new package version, erroneous behavior could occur. | Corporate Content | 5.2.515, 5.2R6 |
| 181367 | Improvements in the area Template Wizard. | Template Wizard | 5.2R4 |
| 181376 | Improved output of input component FS_INDEX in metadata. | Corporate Content, Input Components, SiteArchitect, Template Development | 5.2R3 |
| 181491 181528 181585 | <p>FirstSpirit version 5.2R3 features several optimizations related to use of the FirstSpirit Launcher. This includes security improvements (use via HTTPS, use of cookies, consideration of permissions).</p> <p>Further information can be found in chapter “Administration: Optimizations related to use of the FirstSpirit Launcher”.</p> | FirstSpirit Administrator, Launcher, Security, Server Administrator, Webstart | 5.2R3 |
| 181597 | Improved performance when saving project settings (“SiteArchitect / Global settings”) with large amounts of data. | Global settings | 5.2R4 |



| ID | Description | Categories | Version |
|--------|---|--|----------------|
| 181664 | Changing a dataset using a workflow and a workflow script could lead to erroneous behavior. | Content Store, SiteArchitect, Workflow | 5.2R3 |
| 181736 | <p>The current FirstSpirit version provides MBeans in the JMX console entry “ConnectionPool” which allow visualization and control of database connections.</p> <p>Further information can be found in chapter “Administration: MBeans for visualization and control of database connections (“ConnectionPool”)”.</p> | Database, FirstSpirit Administrator | 5.2.426, 5.2R5 |
| 181806 | Improved search in data sources. | ContentCreator, Search, SiteArchitect | 5.2R4 |
| 181808 | Improved consideration of access privileges on page templates. | ContentCreator, Permissions | 5.2R4 |
| 181816 | In the input component FS_LIST (type DATABASE), selection of datasets could lead to erroneous behavior if an associated query (tag QUERY) used the wildcard %lang% for language-dependent content for a column. | Content Store, SiteArchitect | 5.2R4 |
| 181825 | After installation of a feature in a target project, in rare cases, the order of sections within an updated page could be changed. | Content Transport, Page Store | 5.2R3 |
| 181826 | Optimized evaluation of a parameter from a page reference that is passed to a database query. | Database | 5.2.515, 5.2R6 |
| 181874 | <p>As of the current FirstSpirit version, e-mail addresses with special characters in the domain part (“IDN domains”, RFC 3490) may be used, e.g. “info@müller.de”.</p> <p>Related to this change, several modifications were made to the FirstSpirit Access API.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: E-mail addresses with special characters in the domain part”.</p> | FirstSpirit API, Server Administrator | 5.2R6 |



| ID | Description | Categories | Version |
|------------------|---|--|-------------------|
| 182083 | In ContentCreator forms, depending on the browser, display of an input component which references a data source that contains many datasets may be slow. As of FirstSpirit 5.2R4, the display is thus limited to 100 entries. Further information can be found in chapter “ContentCreator: Improved performance when displaying datasets in input components”. | Content Store, ContentCreator, Developer, Editor, Input Components, Template Development | 5.2R4 |
| 182120 185986 | Improved import behavior in External Synchronization used via API. | External synchronization | 5.2R4 |
| 182179 | Some optimizations have been made to the “Form” and “Rules” tabs for the purpose of code completion in the latest FirstSpirit version. Further information can be found in chapter “SiteArchitect: Code completion optimizations”. | Developer, Dynamic Forms, SiteArchitect, Template Development, Template Store | 5.2R7 |
| 182228 | Improved thumbnail display for media in Media store folders. | Media Store, SiteArchitect | 5.2.424, 5.2R5 |
| 182234 193136 | Improved refreshing the preview after making changes in subforms. | ContentCreator | 5.2.518, 5.2R6 |
| 182334 | Improved user interface when creating multiple thread dumps (menu entry “FirstSpirit / Monitoring / Threads”) in FirstSpirit ServerMonitoring. | ServerMonitoring | 5.2R3 |
| 182409 | In external synchronization, media were erroneously not updated during import. | External synchronization | 5.2R4 |
| 182441 | Corrected standard release workflow. | Workflow | 5.2R4 |
| 182613 | Erroneous behavior could occur during start-up of web applications if Websphere was used as an application server. | FirstSpirit Administrator | 5.2R6 |



| ID | Description | Categories | Version |
|--------|---|--|----------------|
| 182765 | <p>In the input component CMS_INPUT_RADIOBUTTON, the set of available options may be limited by using a rule.</p> <p>Erroneous behavior could occur if the current value of such an input component was not available in the current set of available options.</p> | Dynamic Forms, Input Components, SiteArchitect | 5.2R5 |
| 182781 | The import logging contextual information are enhanced and should be more meaningful if the project export does contain erroneous metadata. | FirstSpirit Administrator, Project export / import | 5.2R4 |
| 182789 | Project exports were erroneously not considered during clean-up of the backup directory. | Backup | 5.2.611, 5.2R7 |
| 182852 | Optimized generation of preview URL using the method <code>getPreviewUrl(Language, TemplateSet, boolean, int, Map<?, ?>)</code> of the interface <code>Previewable</code> (FirstSpirit Access API, package <code>de.espirit.firstspirit.access.store</code>). | ContentCreator, FirstSpirit API | 5.2R3 |
| 182862 | <p>Input components may be used in multiple contexts: in sections, list components such as FS_CATALOG, datasets, and pages. As of the current FirstSpirit version, the property <code>CONTAINERTYPE</code> allows identification of the object type. Depending on the surrounding object type, the input component may, for example, be shown or hidden (or set to be read-only).</p> <p>Further information can be found in chapter "SiteArchitect / ContentCreator: Dynamic forms: New property "CONTAINERTYPE"".</p> | Developer, Dynamic Forms | 5.2R6 |
| 182865 | Evaluating the release state of a dataset has been optimized for the detailed view display. | Content Store, SiteArchitect | 5.2.515, 5.2R6 |



| ID | Description | Categories | Version |
|------------------|---|---|---------|
| 182868 | <p>Toggling the options “Page is completely translated for this language” and “Generate this section in the output” on and off for pages and sections, respectively, now uses simplified keyboard controls.</p> <p>Further information can be found in chapter “SiteArchitect: Optimized keyboard control for consideration of pages and sections in generation”.</p> | Editor, Generation, Page Store, SiteArchitect | 5.2R4 |
| 182884 | Improved keyboard-based selection of entries in the input component CMS_INPUT_LIST. | Input Components | 5.2R5 |
| 182976 | Optimized positioning of the pop-up selection dialog for input components FS_LIST (type DATABASE) that use a query (tag QUERY). | Input Components, SiteArchitect | 5.2R4 |
| 183114 | As of FirstSpirit version 5.2, Oracle JDK 1.6 has been removed from maintenance. The file <i>FIRSTspirit.jnlp</i> has been adjusted accordingly. | Server Administrator, Webstart | 5.2R3 |
| 183128 | In external synchronization (used via API), occasionally, not all objects in a folder structure were properly included in an export into the external file system. | External synchronization | 5.2R4 |
| 183272 | In ContentCreator, programmatic redirects could erroneously no longer be implemented. | ContentCreator | 5.2R4 |
| 183350 | During use of ContentCreator, a problem related to the user session could arise. | ContentCreator | 5.2R4 |
| 183416 184278 | <p>You can now perform web-based updates of your FirstSpirit server/s by simply selecting the desired FirstSpirit version in ServerMonitoring.</p> <p>Further information can be found in chapter “Administration: Server updates using “pull” method”.</p> | FirstSpirit Administrator, License, Server Administrator, Server-Monitoring | 5.2R5 |
| 183430 183873 | During use of FirstSpirit ContentCreator, increased file handle usage could occur. | ContentCreator, FirstSpirit Administrator | 5.2R4 |



| ID | Description | Categories | Version |
|------------------|--|---|---------|
| 183465 | Creating a query may have failed after creating a database schema from an external Oracle database with a BLOB column. | Database | 5.2R7 |
| 183474 | In rare cases, display issues with the Difference icon in modified areas could occur in the Difference view (page status, "Display all changes"). | ContentCreator, Version history | 5.2R4 |
| 183483 | In the external synchronization user interface, improved status display for objects that will be imported. | External synchronization | 5.2R4 |
| 183559 184287 | In order to support the new FirstSpirit Health Center functionality, the protocol for FirstSpirit web applications was modified and is now incompatible to that of previous versions. As in any upgrade and downgrade procedure, it is necessary to ensure that the FirstSpirit web applications are compatible with the FirstSpirit server software's version. Further information can be found in chapter "Administration: Modified protocol for FirstSpirit web applications". | FirstSpirit Administrator, Module development, Server-Manager | 5.2R4 |
| 183591 | Optimized selection of the "Next editor" of a workflow in ContentCreator (using the magnifying glass or "Show more entries..."). Further information can be found in chapter "ContentCreator: Selection dialog for next editor(s) of a workflow". | ContentCreator, Editor, Workflow | 5.2R4 |
| 183612 | Dynamic forms in combination with preset and fallback values: The (partial) prepopulation of form fields with preset and fallback values via the dialog "Edit form defaults" in the Templates store is now possible again. Rule violations which would normally prevent saving a form (e.g. because a mandatory field in the form is empty) will be shown in the dialog "Edit form defaults" but will no longer prevent saving the form in this dialog. | Developer, Dynamic Forms, Input Components, SiteArchitect, Template Development, Template Store | 5.2R4 |
| 183642 | Erroneous behavior could occur during feature installation if the database schema in the target project contained more attributes than that in the source project. | Content Transport | 5.2R4 |



| ID | Description | Categories | Version |
|--------|---|--|----------------|
| 183670 | Saving the inner form of an FS_DATASET input component could lead to erroneous behavior. | Content Store, Input Components, SiteArchitect | 5.2R4 |
| 183699 | Optimized interaction pattern when installing or creating a feature. | Content Transport | 5.2R6 |
| 183736 | In rare cases, switching among tabs in the editorial workspace could lead to erroneous behavior. | SiteArchitect | 5.2R12 |
| 183767 | When starting workflows via the status bar or the context menu, the available workflows will now be sorted using the same ordering. | SiteArchitect, Workflow | 5.2.424, 5.2R5 |
| 183799 | In the project properties of FirstSpirit ServerManager, a setting is now available that defines if selection from remote projects should be limited to objects which have been released at least once. Further information can be found in chapter "Modules: Corporate Media: Limiting selections from remote projects to objects with a release state". | ContentCreator, Corporate Content, FirstSpirit Administrator, Page Store, ServerManager, SiteArchitect | 5.2R4 |
| 183852 | Optimized message board for display of long messages. | SiteArchitect | 5.2R4 |
| 183861 | When starting SiteArchitect using a URL without a domain, the cookies listed in the parameter "clientCookieNames" were erroneously not considered by the integrated Chrome browser. | Preview, SiteArchitect | 5.2R4 |
| 183892 | After deinstallation of the FOP module, the presentation channel was erroneously deleted on the server. | Modules, Server-Manager | 5.2R4 |
| 183978 | Improved performance when using FirstSpirit in HTTP connection mode. | ServerManager, SiteArchitect | 5.2R4 |
| 184015 | Populating the input component CMS_INPUT_TEXT via drag-and-drop from the input component CMS_INPUT_DOM has been improved. | Input Components, SiteArchitect | 5.2R10 |



| ID | Description | Categories | Version |
|--|--|--|----------------|
| 184024 189428 189552 189655 189899 | <p>Extended interaction pattern of FS_INDEX with drag-and-drop functionality: FS_INDEX can now be selected as a drop editor in section, link, and table templates. Furthermore, users may now add and replace entries of compatible data types (e.g. from a report) to/in index components in forms using drag-and-drop.</p> <p>Further information can be found in chapter “Input components: FS_INDEX: Editorial functionality using drag-and-drop”.</p> | ContentCreator, Developer, Editor, Input Components, SiteArchitect, Template Development | 5.2.424, 5.2R5 |
| 184074 | An active server backup mode didn't respect the project registries. | Backup, FirstSpirit Administrator | 5.2R4 |
| 184092 | Optimized positioning of pop-up dialogs displayed via scripts. | SiteArchitect | 5.2R4 |
| 184104 | <p>Workflows on media and media folder elements can now be advanced in the report area under “Tasks”.</p> <p>Further information can be found in chapter “ContentCreator: Workflows on media and media folder elements”.</p> | ContentCreator, Media Store, Workflow | 5.2.611, 5.2R7 |
| 184121 | When adopting changes via translation help, erroneous behavior could occur. | SiteArchitect | 5.2R4 |
| 184178 | Optimized detection of modifications in the input component CMS_INPUT_PERMISSION. | Input Components | 5.2R4 |
| 184179 | Optimized calculation of privileges when editing metadata in ContentCreator. | ContentCreator, Permissions | 5.2R4 |
| 184202 | Improved display behavior of the dialog “Manage media” in ContentCreator (menu entry “Media / Manage media”) after deleting an empty folder. | ContentCreator, Media Store | 5.2R4 |
| 184205 | In the Media store, the action “Delete” was erroneously available on a media element which was already in a workflow. | ContentCreator, Media Store, Workflow | 5.2R4 |
| 184237 | In rare cases, erroneous behavior could occur in the preview. | ContentCreator, Preview, SiteArchitect | 5.2.424, 5.2R5 |



| ID | Description | Categories | Version |
|--|---|---|-------------------|
| 184254 | <p>Due to optimizations of distribution mechanisms, the global web applications included in FirstSpirit (fs5root, fs5preview, fs5webedit, ...) are now provided as FirstSpirit modules (FSM files).</p> <p>Further information can be found in chapter “Modules (general): Distribution of FirstSpirit web applications as modules (.fsm)”.</p> | FirstSpirit Administrator, Modules, Server Administrator, Server-Manager | 5.2R4 |
| 184259 | Performance improvements in the Media store related to managing folders which contain many Media elements. | Media Store, SiteArchitect | 5.2R4 |
| 184278 183395 183412 184940 188224 | <p>There is a new start page in FirstSpirit ServerMonitoring. This page visualizes clearly the hardware and software status of your local FirstSpirit Server as well as of all FirstSpirit Servers which can be reached on the network.</p> <p>Further information can be found in chapter “Administration: The new FirstSpirit Health Center”.</p> | FirstSpirit Administrator, License, Server-Monitoring, Sessions, Webstart | 5.2R4 |
| 184313 189163 | <p>In FirstSpirit SiteArchitect, the context menus for store tree items as well as some buttons in the horizontal toolbar have been modified.</p> <p>Further information can be found in chapter “SiteArchitect: Context menu functionality and horizontal toolbar”.</p> | Developer, Editor, SiteArchitect | 5.2R5 |
| 184314 | Improved propagation of rule infractions in the input component FS_LIST (type PAGE). | Dynamic Forms, Input Components | 5.2.424, 5.2R5 |
| 184333 | <p>Allowed section templates are now only “optionally” required during an import process.</p> <p>Further information can be found in chapter “Modules: Corporate Content: Allowed section templates are now only “optionally” required during an import process”.</p> | Content Transport | 5.2R13 |
| 184340 | During publication using FTP via a proxy server, erroneous behavior could occur. | FirstSpirit Administrator | 5.2R4 |



| ID | Description | Categories | Version |
|--------|--|--|----------------|
| 184352 | Optimized validation behavior related to language-independent input components. | Dynamic Forms, Input Components, SiteArchitect | 5.2R4 |
| 184378 | Relating to the input component FS_DATASET, if a filtered data source is used with <code>selectorMode="list"</code> , the filter will now be observed in the dataset view in the selection list. | Content Store, Editor, Input Components | 5.2.426, 5.2R5 |
| 184390 | The “Open in separate window” action of the input component FS_LIST has been optimized. | Input Components, SiteArchitect | 5.2.518, 5.2R6 |
| 184398 | Erroneous behavior could occur in data source overviews when displaying media for which the user did not possess read permissions. | Content Store, SiteArchitect | 5.2.518, 5.2R6 |
| 184407 | Improved evaluation of parameters passed in connection settings when starting the FirstSpirit Launcher. | Launcher | 5.2.615, 5.2R7 |
| 184442 | <p>When exporting elements via External Synchronization using the FirstSpirit Developer API, the new method <code>setExportRelease(boolean)</code> in the interface <code>ExportOperation</code> (package <code>de.espirit.firstspirit.store.access.nexport.operations</code>) can be used to specify whether the release or the current state of selected elements should be exported.</p> <p>Further information can be found in chapter “External Synchronization: New method “setExportRelease” to specify whether the release or the current state of elements should be exported”.</p> | External synchronization | 5.2R4 |
| 184446 | In ContentCreator, use of the methods <code>getBrokerByProjectName(String)</code> and <code>getBrokerByProjectId(long)</code> in the interface <code>BrokerAgent</code> (Developer API, package <code>de.espirit.firstspirit.agency</code>) could lead to erroneous behavior. | ContentCreator, Developer, FirstSpirit API | 5.2R4 |
| 184511 | In the detailed view of version history, language tabs will now be shown in the same order as on pages in the Page Content store. | SiteArchitect, Version history | 5.2R4 |



| ID | Description | Categories | Version |
|------------------|--|---|-------------------|
| 184520 | From FirstSpirit version 5.2R4 onward, individual web app components can now also be added to global web apps. Further information can be found in chapter “Module Development, Scripts, API: Individualizing the global FirstSpirit web applications”. | Developer, Module development, Server-Manager | 5.2R4 |
| 184598 | After externally editing a medium, display in the integrated preview could lead to erroneous behavior. | Media Store, Preview, SiteArchitect | 5.2R4 |
| 184607 | Where rule definitions are concerned, error handling of incorrect entries inside the <SCHEDULE> tag has been optimized. | Dynamic Forms | 5.2R8 |
| 184620 185321 | Improved communication with the preview servlet. | Preview | 5.2R4 |
| 184621 | When using Oracle databases, using very long column names for N:M foreign key relationships could cause an error. | Database | 5.2R5 |
| 184663 | Corrected version information of the system modules “FirstSpirit ContentCreator” and “FirstSpirit Webapplications”. | Modules | 5.2R4 |
| 184685 | Improved display of ContentCreator splash screen. | ContentCreator | 5.2R4 |
| 184844 | Improved handling of URL parameters in internal preview. | Preview, SiteArchitect | 5.2R4 |
| 184871 | Improved performance when selecting a next editor in a workflow dialog. | ContentCreator | 5.2R6 |
| 185046 | Improved display of input components within the design element CMS_GROUP. | Input Components, SiteArchitect | 5.2R5 |
| 185149 | Improved performance of dataset selection via the input component FS_DATASET. | Input Components, SiteArchitect | 5.2R4 |
| 185165 185246 | During transport with “External Synchronization” (via API), metadata information (created, updated) will now also be considered. | External synchronization | 5.2R4 |
| 185184 | Editing media elements in the Media store could lead to erroneous behavior. | Editor, Media Store | 5.2.424, 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|----------------------------------|---------|
| 185206 | In rare cases the output of normalized content from CMS_INPUT_DOM was incorrect. | Developer | 5.2R19 |
| 185218 | During exports via external synchronization, elements below the root node will now also be considered so that deleted elements will now also be removed in the external file system. | External synchronization | 5.2R4 |
| 185234 | Information about elements that need to be deleted will now be considered during transport via “External Synchronization” (using the API). | External synchronization | 5.2R4 |
| 185251 | Optimized consideration of included project properties during transport using “External Synchronization” (via API). | External synchronization | 5.2R4 |
| 185254 | Optimized calculation of modified status in external synchronization. | External synchronization | 5.2R4 |
| 185261 | When using external synchronization via API, root folders (“Root”; e.g. in the Media or Page Content store) were not deleted if they were no longer included in the next export's set of elements. | External synchronization | 5.2R4 |
| 185267 | In FirstSpirit ServerManager, a web server of type “Generic” could erroneously not be installed in the “Web applications” settings of server or project properties. | ServerManager | 5.2R4 |
| 185283 | Optimized display of entries of FS_CATALOG input components in the “Translation help” dialog. | ContentCreator | 5.2R4 |
| 185298 | <p>Installation of a module with a too large <code>module.xml</code> file could lead to erroneous behavior.</p> <p>As of FirstSpirit 5.2R4, an error message such as <code>Unable to read module descriptor 'XYZ'</code>. Please verify that the file is readable and does not exceed the maximum size of <code>1048576 bytes</code>. will be output.</p> | Modules | 5.2R4 |
| 185333 | Optimized drag-and-drop behavior of data from a report onto an FS_INDEX input component. | ContentCreator, Input Components | 5.2R4 |
| 185348 | Improved interaction pattern of creating a new dataset. | Content Store, SiteArchitect | 5.2R4 |



| ID | Description | Categories | Version |
|------------------|---|---|---------|
| 185385 | In ContentCreator, erroneous behavior could occur after deleting a folder in the “Manage media” dialog. | ContentCreator, Media Store | 5.2R4 |
| 185388 | Improved display refresh behavior in the “Manage media” dialog after creating a new folder. | ContentCreator, Media Store | 5.2R4 |
| 185523 | In external synchronization, improved status calculation after external modification of media content. | External synchronization | 5.2R4 |
| 185584 | When using the module “OfficeConnect”, copy-and-paste operations from a browser or an Excel sheet would also transfer meta information into the input component CMS_INPUT_DOM. | Editor, Input Components, SiteArchitect | 5.2R7 |
| 185592 | When using the operating system Mac OS, external images which were copied via <code>cmd + C</code> were erroneously not displayed in the FirstSpirit clipboard. | Clipboard, SiteArchitect | 5.2R6 |
| 185600 185683 | Security improvement related to the FirstSpirit start page. | Security | 5.2R4 |
| 185626 | By using the newly implemented parameter <code>log4j.logger.org.apache.http.impl.execchain.RetryExec</code> in the file <code>fs-logging.conf</code> it is possible to suppress unwanted “NoRouteToHostExceptions”. Further information can be found in chapter “Administration: Logging in “fs-server.log” (NoRouteToHostException)”. | FirstSpirit Administrator | 5.2R7 |
| 185640 | In “External Synchronization”, the file <code>Import.txt</code> in the root export directory did not clearly identify the associated project. | External synchronization | 5.2R4 |
| 185643 | Exporting a project could lead to erroneous behavior. | Project export / import | 5.2R4 |
| 185652 | Improved change status calculation for objects when external synchronization is run after normal project export/import. | External synchronization | 5.2R4 |
| 185695 189317 | In the input component CMS_INPUT_DOM, the parameter <code>enableImport</code> activates use of the functionality provided by the module “FirstSpirit OfficeConnect”. Optimized import into FirstSpirit of images that were resized within an Office document. | Modules, SiteArchitect | 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 185711 | During project import, a backup of the file “fs-database.conf” is now created when a new database layer is selected. | FirstSpirit Administrator | 5.2R5 |
| 185753 | Erroneous behavior related to nested input components FS_LIST (type INLINE) could occur if the outer input component was used within a dataset form. | Input Components | 5.2R5 |
| 185766 | In the version history, it was possible in rare cases that the display of the contents of the columns “Editor” and “Comment” was swapped. | SiteArchitect, Version history | 5.2R8 |
| 185776 | Optimized evaluation of privileges for thumbnail images in the selection dialog when creating pages or sections. | SiteArchitect | 5.2.426, 5.2R5 |
| 185829 | Optimized memory usage of servlet engine. | ContentCreator | 5.2R4 |
| 185873 | Improved evaluation of permissions when editing inherited metadata. | Permissions, SiteArchitect | 5.2.518, 5.2R6 |
| 185875 | Improved display of changes in the “Project History” report. | ContentCreator, Reports, Version history | 5.2R5 |
| 185911 | Improved removal of entries in CMS_INPUT_LIST input components using the Del key. Further information can be found in chapter “SiteArchitect: Optimized keyboard control of CMS_INPUT_LIST”. | Input Components, SiteArchitect | 5.2R4 |
| 185985 | The external synchronisation did not take changes to page references into account. | External synchronization | 5.2R4 |
| 186014 | In a deeply nested FS_LIST (DATABASE type) adding an entry might have displayed an empty view for the new sub form. | Input Components, SiteArchitect | 5.2R4 |



| ID | Description | Categories | Version |
|------------------|--|--|-------------------|
| 186041 186028 | <p>The method <code>setIgnoreEntities(boolean ignore)</code> of the interface <code>ImportOperation</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.store.access.n-export.operations</code>) replaces the method <code>setCreateEntities</code>, which has been deprecated as of FirstSpirit version 5.2R4. The new method controls whether existing entities should be imported into the FirstSpirit project.</p> <p>Further information can be found in chapter “External Synchronization: New method “setIgnoreEntities” replaces “setCreateEntities””.</p> | External synchroni- zation | 5.2R4 |
| 186072 | Automatic population of a data source using a script could lead to erroneous behavior. | Content Store, Modules | 5.2R4 |
| 186099 | Optimized memory usage when switching between many languages while editing a page. | SiteArchitect | 5.2R4 |
| 186100 | In the FirstSpirit schema editor, creating a 1:N relationship to the same table has been optimized. | Database, Developer | 5.2.515, 5.2R6 |
| 186110 187353 | Improved performance when loading forms in projects with many project languages. | SiteArchitect | 5.2R4 |
| 186420 | <p>The standard image resolution for the FOP presentation channel can now be specified using the structure variable <code>fs_fop_source_resolution</code>.</p> <p>Further information can be found in chapter “Modules: FOP: Specify Standard Image Resolution”.</p> | Developer, FirstSpirit Administrator, Media Store, Modules | 5.2R4 |
| 186561 | A request-release workflow that releases via the end state only, not defining an error state, will now be closed when releasing an object failed. | Workflow | 5.2R4 |
| 186590 | Improved the sorting possibilities in combination with full text search in the data source overview view. | Content Store, SiteArchitect | 5.2R4 |
| 186602 | Optimized evaluation of privileges when setting a temporary filter on a data source. | Content Store, Permis- sions | 5.2.424, 5.2R5 |



| ID | Description | Categories | Version |
|--------|--|------------------------------------|-------------------|
| 186691 | Improved display of correction hints when form validation (rules) fails. | Dynamic Forms, SiteArchitect | 5.2R4 |
| 186692 | Beginning with Oracle JDK 1.8, the interface <code>ProcessAgent</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.agency</code>) will use standard JDK functionality to start external processes server-side. | Developer | 5.2.424, 5.2R5 |
| 186705 | Improvements in external synchronization for nested input components. | External synchronization | 5.2.422, 5.2R5 |
| 186846 | Modifications of mutable form values during the generation process now only have local effects and therefore do not affect the results of other channels. | Generation | 5.2.422, 5.2R5 |
| 186863 | If the schedules “Repair References” and “Rebuild Index” had been configured for interactive execution, by mistake authorized persons were not able to execute them. | SiteArchitect, Tasks | 5.2R4 |
| 186868 | When moving the mouse pointer within a report, an unnecessary amount of log output was generated. | SiteArchitect | 5.2R19 |
| 186882 | When searching within a data source, sometimes, datasets were not found by a user due to specific access right settings. | Content Store, Permissions, Search | 5.2R4 |
| 186896 | Displaying the node properties via the keyboard shortcut <code>Alt + P</code> could lead to erroneous behavior. | SiteArchitect | 5.2.424, 5.2R5 |
| 186900 | Optimized release of child elements. | Release, SiteArchitect | 5.2.424, 5.2R5 |
| 186917 | In rare cases, erroneous behavior could occur when opening the selection dialog in the input component <code>FS_REFERENCE</code> . | Input Components, SiteArchitect | 5.2.611, 5.2R7 |
| 187004 | Automatic population of a data source using a script could lead to erroneous behavior. | Content Store, Developer | 5.2R5 |
| 187107 | Improved validation behavior related to nested <code>FS_LIST</code> input components in projects with many languages. | Input Components, SiteArchitect | 5.2R5 |



| ID | Description | Categories | Version |
|----------------------------|---|--|-------------------|
| 187137 | <p>The new parameter <code>preview.enableTemporalPreview-Cache</code> (in the configuration file <code>fs-server.conf</code>) may be used to affect caching for preview pages.</p> <p>Further information can be found in chapter “Administration: Caching of preview files”.</p> | FirstSpirit Administrator, Preview | 5.2.615, 5.2R7 |
| 187154 | In the external synchronization process content for languages not included in the source project were skipped during the import into the target project. | External synchronization | 5.2R4 |
| 187172 162113 187318 | <p>A number of additions have been made to the “Snippet” area with FirstSpirit version 5.2R4.</p> <p>Further information can be found in chapter “Input components: Extended snippet access for FS_INDEX and FS_CATALOG”.</p> | ContentCreator, Developer, Input Components, SiteArchitect, Snippets, Template Development | 5.2R4 |
| 187215 | Switching between projects (Menu “Project / Switch Projects”) sometimes failed. | SiteArchitect | 5.2R4 |
| 187251 | While saving a page for which the user has no right to edit the metadata, it could lead to errors. | Permissions, SiteArchitect | 5.2R4 |
| 187274 | In rare cases, using the browser engine “Google Chrome” for internal preview could lead to erroneous behavior. | Preview, SiteArchitect | 5.2R5 |
| 187285 | Improved certificate evaluation in the integrated preview when it uses Mozilla Firefox as browser engine. | Preview, Security | 5.2.422, 5.2R5 |
| 187322 | In rare cases the function “Display all changes” displayed no result. | ContentCreator | 5.2R4 |
| 187374 | The workflow for deleting elements did not respect the display logic script. | Workflow | 5.2R4 |
| 187437 | Optimized caching for remote projects in the action context. | Developer, FirstSpirit Administrator | 5.2.515, 5.2R6 |
| 187444 | For the language-independent input component FS_LIST (DATABASE type), when switching between languages, newly added entries were not handled properly. | Input Components, SiteArchitect | 5.2R4 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 187469 | Optimized list formatting in the input component CMS_INPUT_DOM. | ContentCreator | 5.2.611, 5.2R7 |
| 187494 | Optimizations for the number of open file handles. | Performance | 5.2R5 |
| 187507 | <p>Web applications will now be updated automatically during every FirstSpirit server update.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Update of Web Applications”.</p> | Developer, Module development, Modules, ServerManager | 5.2R4 |
| 187600 | <p>Improved client resilience to brief interruptions in communication with the server.</p> <p>Further information can be found in chapter “SiteArchitect / ServerManager: Reconnecting after Communication Errors”.</p> | ServerManager, SiteArchitect | 5.2R5 |
| 187660 | When populating the input component FS_INDEX via drag-and-drop from a report in ContentCreator, restrictions of the rule property “ADD” were not considered. | ContentCreator, Dynamic Forms, Input Components | 5.2.424, 5.2R5 |
| 187707 | During generation, erroneous behavior could occur when outputting remote media with identical display names. | Generation | 5.2.518, 5.2R6 |
| 187740 | <p>As of the current FirstSpirit version, viewports of the functionality “Multi Perspective Preview” (MPP) can now be created, modified, and deleted via API.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Multi Perspective Preview: Creating and configuring viewports via API”.</p> | Developer, FirstSpirit API, Multi Perspective Preview | 5.2R6 |
| 187753 | <p>Duplicate conversion when using <code>.convert</code> and <code>.convert2</code> in FS_LIST will now be suppressed.</p> <p>Further information can be found in chapter “Input components: Methods <code>.convert</code> and <code>.convert2</code> in FS_LIST”.</p> | Developer, Input Components, Template Development, Template Store | 5.2R4 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 187823 | <p>The content of FirstSpirit JAR files is signed with a certificate. In the current FirstSpirit version, the content is signed with a new certificate that is valid until 2018-06-13 (13 June 2018).</p> <p>Further information can be found in chapter “General: Code signing certificate updated”.</p> | Webstart | 5.2R5 |
| 187851 | <p>When using the functionality “External Synchronization”, the method <code>setDatabaseLayerMapper(ImportOperation.DatabaseLayerMapper)</code> of the interface <code>ImportOperation</code> (FirstSpirit API, package <code>de.espirit.firstspirit.store.access.nexport.operations</code>) will now use the correct database layer.</p> | External synchronization | 5.2.424, 5.2R5 |
| 187852 | <p>After changing a dataset a delta generation may have shown a failure.</p> | Delta generation | 5.2R4 |
| 187874 | <p>In the task list, tasks were erroneously visible to a user who did not have rights to process these tasks.</p> | Permissions, SiteArchitect | 5.2R6 |
| 187934 | <p>In rare cases, the display of the “Edit image section” icon on media in the section area was erroneous.</p> | ContentCreator | 5.2R8 |
| 188050 | <p>The GUI of the “External Synchronization” will be omitted with FirstSpirit 5.2R4.</p> <p>Further information can be found in chapter “External Synchronization: GUI will be omitted”.</p> | Developer, External synchronization, FirstSpirit API, FirstSpirit Administrator, SiteArchitect | 5.2R4 |
| 188089 | <p>Errors occurred when displaying deleted elements in the project history report.</p> | ContentCreator | 5.2R20 |
| 188105 | <p>In the Media store and in media selection dialogs, erroneous behavior could occur while loading miniature previews of image resolutions.</p> | Media Store, SiteArchitect | 5.2R5 |
| 188108 | <p>Optimized translation help in ContentCreator.</p> <p>Note: In ContentCreator, translation help is an optional feature that is only available if the project is configured to use it, i.e., a project-specific solution that opens translation help was implemented.</p> | ContentCreator | 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 188182 | Improved display of the status bar in the editorial workspace. | SiteArchitect | 5.2.422, 5.2R5 |
| 188240 | <p>To provide better clarity, language tabs won't be shown anymore in FS_CATALOG components that allow selecting link templates (<TEMPLATES type="link">).</p> <p>Further information can be found in chapter "Input components: FS_CATALOG: Representing language independent content (link lists)".</p> | Input Components | 5.2R16 |
| 188265 | <p>Due to refactoring measures, entries were removed from the file <code>fs-webapp.xml</code>. This change only affects new installations. For existing FirstSpirit installations, this change may be carried out manually by the FirstSpirit administrator if so desired.</p> <p>Further information can be found in chapter "Administration: Refactoring of the file <code>fs-webapp.xml</code> (web server "Jetty")".</p> | FirstSpirit Administrator | 5.2R12 |
| 188328 | The evaluation and display of changes within the version comparison was improved for the FS_CATALOG input component. | ContentCreator, SiteArchitect, Version history | 5.2R10 |
| 188354 | Improved editing of the input component FS_CATALOG in subforms. | Editor, Input Components, SiteArchitect | 5.2.424, 5.2R5 |
| 188373 | Optimized form updates when using rules to display or hide input components. | Dynamic Forms, SiteArchitect | 5.2.611, 5.2R7 |
| 188389 | <p>With the current FirstSpirit version, additional data sources with all datasets that are contained in the data source at the time of an export can now be exported. You can also check and modify the "implicit/explicit state" for a feature element under "Included objects".</p> <p>Further information can be found in chapter "Modules: Content Transport: Moving datasets and changing the explicit/implicit state of elements".</p> | Content Store, Content Transport | 5.2R20 |



| ID | Description | Categories | Version |
|------------------|---|--|----------------|
| 188416 | Optimized the process of uploading media files via the “Media Import Wizard”. | Media Store, SiteArchitect | 5.2R5 |
| 188440 | If a duplicated conversion of entities using <code>.convert</code> or <code>.convert2</code> has been prevented, a warn message will now be added to the generation log. | Developer, Template Development | 5.2R7 |
| 188445 | As of the current FirstSpirit version, it is possible to detect the user interface language of ContentCreator that was selected by the current user. Further information can be found in chapter “Module Development, Scripts, API: ContentCreator: Detection of the user interface language (“Locale”) selected by the current user”. | ContentCreator, Developer, FirstSpirit API | 5.2.611, 5.2R7 |
| 188461 | When uploading a media file into the Media store using the dialog “Create medium”, the file selection dialog defaults to the directory “Documents” within the local user directory. During further file upload actions, the file selection dialog will start in the most recently selected directory. | Media Store | 5.2.426, 5.2R5 |
| 188464 189112 | As of the current FirstSpirit version, maintenance mode schedule entry actions can now be created via API and running maintenance modes schedules can be terminated via API. Further information can be found in chapter “Module Development, Scripts, API: Creating maintenance mode schedule tasks via API”. | FirstSpirit API, Module development, Tasks | 5.2.518, 5.2R6 |
| 188467 | Improved visualization of rule infractions in nested FS_CATALOG input components. | Dynamic Forms, SiteArchitect | 5.2R5 |
| 188503 | Improved media import via Media Import Wizard. | Media Store | 5.2.424, 5.2R5 |
| 188550 | Improved configuration and evaluation of parameters when several web applications are used. | Server Administrator | 5.2R5 |
| 188564 | Improved file selection dialog of the input component FS_REFERENCE. | Editor, Input Components, SiteArchitect | 5.2.426, 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 188569 | Stability improvement related to SiteArchitect. | SiteArchitect | 5.2.424, 5.2R5 |
| 188580 | In the method <code>disconnect()</code> of the interface <code>Connection</code> (FirstSpirit Access API, package <code>de.espirit.firstspirit.access</code>), improved the disconnection procedure. | Developer | 5.2R5 |
| 188624 | Starting a FirstSpirit server could lead to erroneous behavior if the user's home directory could not be written to. | FirstSpirit Administrator | 5.2.422, 5.2R5 |
| 188634 | Under special circumstances, displaying the Health Center in FirstSpirit ServerMonitoring could lead to erroneous behavior. | Health Center | 5.2.422, 5.2R5 |
| 188700 | <p>Changed standard configuration: The preset values of the optional parameters <code>sessionCookieName</code> and <code>sessionCookieName.ROOT</code> in the file <code>fs-server.conf</code> were changed. For all new installations of FirstSpirit, a FirstSpirit-specific session cookie name will be used for all web applications and the root application.</p> <p>Further information can be found in chapter "Administration: Changed standard configuration of session cookies for new installations".</p> | FirstSpirit Administrator, Server Administrator, Sessions | 5.2R5 |
| 188703 | In rare cases, an additional instance of the ContentCreator user interface could be shown nested within another instance of the user interface. | ContentCreator | 5.2R5 |
| 188709 | Optimized FirstSpirit access control database. | Database | 5.2.515, 5.2R6 |
| 188731 | <p>Entering text into the input component <code>CMS_INPUT_DOMTABLE</code> is now also possible via drag-and-drop and, when using the module "FirstSpirit OfficeConnect", via <code>Ctrl+V</code>.</p> <p>Further information can be found in chapter "SiteArchitect: Drag-and-drop support for <code>CMS_INPUT_DOMTABLE</code>".</p> | Editor, Input Components, Modules, SiteArchitect | 5.2.424, 5.2R5 |



| ID | Description | Categories | Version |
|--------|--|----------------------------------|-------------------|
| 188781 | The FirstSpirit license contains information about the maximum allowable number of open sessions. The evaluation of this parameter and the interaction pattern related to exceeding the licensed maximum number of open sessions has been optimized. | License, Sessions | 5.2R5 |
| 188813 | Improved use of keyboard shortcuts. | SiteArchitect | 5.2R5 |
| 188915 | If the search string contains an unsupported special character, the search may be repeated as an exact search by clicking <u>Perform an exact search.</u> Further information can be found in chapter “SiteArchitect: Repeating a search after erroneous input”. | Search, SiteArchitect | 5.2R8 |
| 188981 | Optimized evaluation of connection mode in local connection settings. | FirstSpirit Administrator | 5.2R20 |
| 188994 | In metadata, referencing an element which has never been released could lead to unexpected results during generation. | SiteArchitect | 5.2R5 |
| 189052 | The export process of external synchronization to an existing folder may have led to a failure. | External synchronization | 5.2.422, 5.2R5 |
| 189126 | The new property <code>PRESET</code> may be used to determine if the user is currently editing in the dialog “Edit form defaults”. Further information can be found in chapter “Input components: Dynamic Forms: New Property “PRESET””. | Developer, Dynamic Forms | 5.2R17 |
| 189128 | Optimized interaction pattern in Media Management when the user does not have <code>CAN_SEE</code> privileges. | ContentCreator | 5.2R8 |
| 189166 | When creating a new page in ContentCreator, dot characters (‘.’) in the display name were erroneously preserved in the reference name. | ContentCreator | 5.2.426, 5.2R5 |
| 189182 | In the input component <code>FS_INDEX</code> , creating a new dataset could lead to erroneous behavior. | ContentCreator, Input Components | 5.2.422, 5.2R5 |
| 189212 | Improved search for dataset ID. | Content Store, Search | 5.2.424, 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|----------------|
| 189214 | Calling methods of module classes in FS templates may have led to a failure. | Developer, Template Development | 5.2.422, 5.2R5 |
| 189258 | <p>The behavior of id#187753 (see release notes to FirstSpirit version 5.2.421) showed unwanted effects in script executions and therefore it must be activated explicitly from this build on. Please ask our technical support for guidance.</p> <p>If the behavior is activated scripts may be adapted to the potential change of the data type of the input component CMS_INPUT_TEXT from type <code>String</code> to <code>CharSequence</code>.</p> | Developer, Input Components, Template Development | 5.2.422, 5.2R5 |
| 189284 | Security improvements in the module “FirstSpirit BasicSearch”. | Modules, Security | 5.2.424, 5.2R5 |
| 189318 | Use of certain data types in an Oracle database could lead to erroneous behavior related to sorting in data sources. | Content Store, Database, Editor, SiteArchitect | 5.2R7 |
| 189359 | Optimized initial display of the suggestion list in the search field of global search and search in the selection dialog of the input component FS_REFERENCE. | Search, SiteArchitect | 5.2R5 |
| 189394 | When generating in some cases the project properties “substitution medium” and “substitution page” have not been respected. | Generation | 5.2R5 |
| 189438 | When using the input component CMS_INPUT_DATE in metadata, performing a search within metadata could erroneously cause the input component to be displayed in single-lined mode (parameter <code>singleLine</code>) in the metadata form. | Input Components, Search | 5.2R5 |
| 189461 | When using the functionality “External Synchronization”, importing objects with forms which reference elements that are not yet available in the project could lead to erroneous behavior. | External synchronization | 5.2R5 |
| 189465 | Optimized display of thumbnails in the brief overview of data sources. | Content Store, Snippets | 5.2.424, 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|----------------|
| 189489 | Improved notifications of upload hooks when they are used to create media. | Media Store | 5.2R19 |
| 189508 | In ContentCreator, searching in Help could lead to erroneous behavior. | ContentCreator, Search | 5.2.424, 5.2R5 |
| 189535 | In the input component FS_DATASET with mode="dialog", saving after switching between languages could lead to erroneous behavior. | Input Components, SiteArchitect | 5.2.615, 5.2R7 |
| 189628 | Improved SiteArchitect performance. | Performance, SiteArchitect | 5.2R5 |
| 189635 | Modified log output for the report "Project History" when starting ContentCreator. | ContentCreator | 5.2.615, 5.2R7 |
| 189637 | Improved display of forms when switching between language tabs. | SiteArchitect | 5.2.424, 5.2R5 |
| 189660 | Improved display of media folders, taking into consideration configured permissions. | Media Store, Permissions, SiteArchitect | 5.2.424, 5.2R5 |
| 189662 | Sporadically, erroneous behavior could occur in the preview while working with ContentCreator. | ContentCreator, Preview | 5.2.424, 5.2R5 |
| 189681 | As of the current FirstSpirit version, a project-specific actions menu can be offered to editors who use ContentCreator. Further information can be found in chapter "ContentCreator: Project-specific action menu". | ContentCreator, Developer, Editor | 5.2R6 |
| 189752 | Improved evaluation of privileges on a data source when creating a new dataset via the input component FS_DATASET. | Input Components, Permissions | 5.2.424, 5.2R5 |
| 189766 | Importing a page via "External Synchronization" could lead to erroneous abortion of the import process if the page template used was not present before. Now, the page will not be imported, and the error will be added to ImportOperation.Result. | External synchronization | 5.2R5 |
| 189790 | Improved evaluation of rules in child forms of the input components FS_LIST and FS_CATALOG. | Dynamic Forms, SiteArchitect | 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|--|-------------------|
| 189979 | Optimized revalidation in forms when using the form properties <i>SIZE</i> , <i>LENGTH</i> , <i>ENTRY</i> , and the comparison expression <i>CONTAINS</i> . | Dynamic Forms | 5.2.424, 5.2R5 |
| 189983 | In the input component CMS_INPUT_DOM with inline tables, erroneous behavior could occur if no table format templates were defined in the project. | ContentCreator, Input Components | 5.2.424, 5.2R5 |
| 190052 | <code>ProjectReferencesAgent.rebuildReferences(ID-Provider)</code> now repairs more broken references. Further information can be found in chapter “Module Development, Scripts, API: Repairing broken references (rebuildReferences)”. | FirstSpirit API | 5.2R7 |
| 190065 | In the data source overview, default values will now be displayed in semi-transparent fashion. Further information can be found in chapter “SiteArchitect: Display of Default Values in Data Sources”. | Content Store, SiteArchitect | 5.2.426, 5.2R5 |
| 190178 | Optimized evaluation of rules when using the property <i>SECTION</i> for the input component FS_REFERENCE. This property may be used to check if a section is selected. | Dynamic Forms, Input Components, SiteArchitect | 5.2.426, 5.2R5 |
| 190195 | Publishing a package with nodes that were deleted or archived in the source project could cause an error message to be logged. The message will now be logged with the log level “TRACE” such that it no longer appears as an error (log level “ERROR”). | Corporate Content | 5.2.426, 5.2R5 |
| 190207 | The configuration file “fs-server.conf” now allows optional configuration of specific values for session cookies. The new attributes can define values for domain, path, and the secure flag of the session cookie. Further information can be found in chapter “Administration: Configuration of session cookies (fs-server.conf)”. | FirstSpirit Administrator, Launcher, Server Administrator, ServerManager, Sessions, Webstart | 5.2.426, 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 190263 | Corrected access to form fields during generation (FirstSpirit Access API, package <code>de.espirit.firstspirit.forms</code> , interface <code>FormData</code> , method <code>get(Language, String)</code>). | Generation | 5.2.426, 5.2R5 |
| 190314 | <p>During import of a database schema using the functionalities “FirstSpirit Content Transport” or “External Synchronization”, the new interface <code>LayerMapper</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.transport</code>) allows selection of a database layer onto which the schema should be mapped.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: External Synchronization / Content Transport: Selecting a database layer for import”.</p> | Content Transport, Database, Developer, External synchronization, FirstSpirit API | 5.2R5 |
| 190331 | If multiple users requested the preview of a page and the calculation took long, this could have led to erroneous behavior. | Preview, SiteArchitect | 5.2R9 |
| 190333 | Drag-and-drop of media between projects could lead to erroneous behavior. | Media Store, SiteArchitect | 5.2R5 |
| 190396 | In the input component FS_LIST (type PAGE), optimized rules evaluation relating to deleted sections. | Dynamic Forms, Input Components, SiteArchitect | 5.2R6 |
| 190417 | SiteArchitect performance improvements. | Editor, SiteArchitect | 5.2.426, 5.2R5 |
| 190420 | Previously, during an import via “FirstSpirit Corporate-Content”, nodes in the tree structure were in some cases set to display the metadata icon even though “FirstSpirit Corporate-Content” does not transport metadata. This was corrected in the current FirstSpirit version: now, the metadata icon will no longer be set at all after importing via “FirstSpirit Corporate-Content”. | Corporate Content | 5.2R8 |
| 190461 | After deleting user groups in the project properties (“FirstSpirit ServerManager / Project / Properties / Groups / Remove group”) related information on nodes with defined permissions in SiteArchitect were erroneously not updated. | FirstSpirit Administrator, Permissions | 5.2.515, 5.2R6 |



| ID | Description | Categories | Version |
|--------|--|---|----------------|
| 190569 | The configuration of a new feature package can again be tested in the schedule action “Content Transport” (Server-Manager / Project / Properties / Schedule management / Add / Default schedule / Actions / Add / Content Transport / Test configuration). | Content Transport, ServerManager | 5.2.426, 5.2R5 |
| 190604 | A section reference can now also be created via the context menu entry “Paste as section reference” or via the keyboard shortcut Ctrl + Alt + V . Further information can be found in chapter “SiteArchitect: Creating a section reference via context menu or keyboard shortcut”. | Editor, SiteArchitect | 5.2R8 |
| 190647 | It is possible to restrict the choice of data sources for the input component FS_DATASET by using the tag <CONTENT>. The configured data sources are now better respected in the selection dialog. | SiteArchitect | 5.2R9 |
| 190695 | In association with a Tomcat web server, authentication via the FirstSpirit start page could lead to erroneous behavior if a password contained special characters. | FirstSpirit home page, Server Administrator | 5.2R5 |
| 190715 | Optimized rule evaluation during emptiness check (property EMPTY). | Dynamic Forms | 5.2.426, 5.2R5 |
| 190752 | Optimized display of the start page in Google Chrome when using automatic login. | FirstSpirit home page | 5.2R5 |
| 190759 | Improved logging of web applications running on Tomcat web server. | FirstSpirit Adminis- trator | 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 190822 | <p>In the module “FirstSpirit Security”, the parameter <code>profil-name.dir</code> in the file “<code>crcTransfer.ini</code>” may be used to configure the web application.</p> <p>If the parameter was given a value which included a trailing slash (<code>.../</code>) in the path string, erroneous behavior could occur.</p> <p>Now, it is possible to use a path that includes a trailing slash character.</p> | Modules | 5.2R5 |
| 190852 | For the input component FS_CATALOG, improved the input dialog and drag-and-dropp of media from the AppCenter. | Editor, Input Components, SiteArchitect | 5.2.426, 5.2R5 |
| 190870 | When using Apache Tomcat version 8.0.36, instead of displaying the specifically requested dataset on a content projection page, the first dataset of this content projection may have been displayed. | ContentCreator, Editor, Preview | 5.2.426, 5.2R5 |
| 190879 | In SiteArchitect running on Mac OS X, erroneous use of the system clipboard could occur. | Clipboard, SiteArchitect | 5.2R5 |
| 190950 | Optimized display of the “Task list” menu icon. | SiteArchitect | 5.2R5 |
| 191045 | Optimized automatic roll-out of web applications during server start-up. | Server Administrator | 5.2R5 |
| 191115 | Optimized determination of release state of restored folders. | Release | 5.2R5 |
| 191129 | In rare cases, erroneous behavior could arise when creating features. | Content Transport | 5.2R20 |
| 191158 | Improved behavior of a release workflow, specific to situations in which the element to be released contains invalid references (e.g. in an FS_REFERENCE input component). | Release, SiteArchitect, Workflow | 5.2R5 |
| 191161 | In very rare cases, using the input component FS_CATALOG could lead to erroneous behavior. | Input Components, SiteArchitect | 5.2R5 |
| 191174 | Importing content packages into projects which define languages that were not defined in the source project could lead to erroneous behavior in input components that are grouped with the design element CMS_GROUP. | Corporate Content, Input Components | 5.2.426, 5.2R5 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 191211 | During configuration of a database schema, renaming columns with N:M foreign key relationships could lead to erroneous behavior. | Database | 5.2R5 |
| 191247 | Optimized determination of the target element of dataset selection in a data source for the following actions: <ul style="list-style-type: none"> ■ “Version history” (Ctrl + H) ■ “Extras / Show usages” (Ctrl + U) ■ “Extras / Display dependencies” (Ctrl + R) | Content Store, SiteArchitect | 5.2.515, 5.2R6 |
| 191303 | Optimized setting values via rules in ContentCreator. | ContentCreator, Dynamic Forms | 5.2R6 |
| 191353 | Optimized display of data source contents in the selection dialog of the input component FS_LIST (type DATABASE). | ContentCreator | 5.2R5 |
| 191357 | Realignment of module development: As of the current FirstSpirit version, modules can for the first time be developed with isolated resources. This new functionality allows module developers greater freedom in the selection of libraries to be used. Global dependencies to other product components are mostly avoided. Further information can be found in chapter “Module Development, Scripts, API: Isolated mode (BETA) - Realignment of module development”. | Developer, Module development, Modules | 5.2R6 |
| 191363 | In the input component CMS_INPUT_DOM with active spell check, erroneous behavior could occur. | ContentCreator | 5.2.615, 5.2R7 |
| 191377 | Optimized spell check for the input components CMS_INPUT_DOM and CMS_INPUT_DOMTABLE. | ContentCreator, SiteArchitect | 5.2R5 |
| 191399 | Optimized handling of rule infractions in ContentCreator. | ContentCreator, Dynamic Forms | 5.2R5 |



| ID | Description | Categories | Version |
|----------------------------|---|--|-------------------|
| 191472 167578 174226 | <p>FirstSpirit version 5.2R3 implemented a new roll-out behavior for the FirstSpirit web applications. The previously used ZIP files have now been removed from the file <code>fs-server.jar</code>. This leads to a significant decrease in the file size of <code>fs-server.jar</code>.</p> <p>Further information can be found in chapter “Modules (general): Distribution of the FirstSpirit web applications as modules (.fsm)”.</p> | FirstSpirit Administrator, Modules, ServerManager | 5.2R6 |
| 191719 | <p>The file names of backup copies of <code>fs-server.jar</code> files, created during server updates via FirstSpirit ServerMonitoring, will now be formed using <code>_jar</code> instead of <code>.jar</code>.</p> <p>Further information can be found in chapter “Administration: Server Update: File name change for backup copies of files”.</p> | Server Administrator | 5.2R6 |
| 191724 | Using the input component FS_LIST (type DATABASE) within metadata could lead to erroneous behavior. | Input Components, SiteArchitect | 5.2R5 |
| 191797 | In rare cases, use of the FirstSpirit Launcher could lead to erroneous behavior. | Launcher | 5.2R5 |
| 191806 191794 | Security improvements in ServerManager. | Security, Server-Manager | 5.2R5 |
| 191874 | In the input component CMS_INPUT_DATE, input via keyboard could cause erroneous behavior. | ContentCreator | 5.2.615, 5.2R7 |
| 191939 | In a workflow, users that have server administrator privileges could erroneously not be selected as next editors. | SiteArchitect, Workflow | 5.2R5 |
| 191967 | <p>The new plugin type <code>WebeditStatusNotePlugin</code> may be used to prominently display page-related status information in ContentCreator.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: ContentCreator: Displaying page-related status information prominently”.</p> | ContentCreator, Developer, Editor, FirstSpirit API | 5.2.518, 5.2R6 |
| 191968 | In the input component FS_INDEX, erroneous behavior could occur when cancelling edit mode on a newly created entry. | Input Components, SiteArchitect | 5.2.518, 5.2R6 |



| ID | Description | Categories | Version |
|--------|--|--|----------------|
| 191973 | Using “Translation Help” functionality could lead to erroneous behavior. | SiteArchitect | 5.2R5 |
| 192058 | In rare cases, erroneous behavior could occur during media import. | Media Store, SiteArchitect | 5.2R6 |
| 192075 | Using several web components can potentially cause conflicts between identical resources. Optimized conflict identification and conflict resolution. | FirstSpirit Administrator, Modules | 5.2.518, 5.2R6 |
| 192110 | For the input component FS_DATASET, optimized rule evaluation when creating a new dataset. | Dynamic Forms, Input Components, SiteArchitect | 5.2R5 |
| 192144 | Optimized use of JSP Includes for inclusion of HTML or JSP content in a FirstSpirit page. | ContentCreator, Preview | 5.2R5 |
| 192153 | When creating a format template, after inputting a reference name, the label of the field “Reference name” was erroneously still shown in red type. | SiteArchitect, Template Store | 5.2.515, 5.2R6 |
| 192162 | <p>On a <i>FormData</i> object, the method <code>get(Language, String)</code> allows access to the <i>FormField</i>.</p> <p>The output of the following (simplified) syntax, which allows access to the content of a <i>FormField</i> in the language currently being rendered, has been corrected:</p> <pre>\$CMS_VALUE(IDENTIFIER.formData[" IDENTIFIER2 "])\$</pre> <p>Alternatively, either of the following syntaxes will yield the same result:</p> <pre>\$CMS_VALUE(IDENTIFIER.formData.IDENTIFIER2)\$</pre> <pre>\$CMS_VALUE(IDENTIFIER.formData.get(" IDENTIFIER2 "))\$</pre> | Developer | 5.2R5 |
| 192181 | Optimized deletion of link templates that are still referenced. | Template Development | 5.2R17 |



| ID | Description | Categories | Version |
|----------------------------|--|--|----------------|
| 192222 | <p>Stability when accessing FirstSpirit web applications on external web servers has been improved.</p> <p>Further information can be found in chapter “Administration: Starting process: Improved stability when accessing FirstSpirit web applications on external web servers”.</p> | FirstSpirit Administrator, ServerManager | 5.2.515, 5.2R6 |
| 192274 | Saving several times during editing in “Translation Help” could lead to erroneous behavior. | Editor, SiteArchitect | 5.2R5 |
| 192328 | In rare cases, releasing a page reference could lead to erroneous behavior. | Release, SiteArchitect | 5.2R6 |
| 192424 | <p>A new -D parameter can speed up work with the file selection dialog (FirstSpirit SiteArchitect and FirstSpirit ServerManager).</p> <p>Further information can be found in chapter “SiteArchitect / ServerManager: Speeding up file selection from directory structure of the client workstation”.</p> | Editor, FirstSpirit Administrator, FirstSpirit home page, Media Store, Performance, ServerManager, SiteArchitect | 5.2.515, 5.2R6 |
| 192456 | When copying sections, the original order was erroneously not observed. | Page Store, SiteArchitect | 5.2.615, 5.2R7 |
| 192462 | Erroneous behavior could occur when using the functionality “LiveEdit”. | ContentCreator | 5.2.615, 5.2R7 |
| 192539 | Using WebSphere as an application server may have resulted in malfunctions when logging in on the FirstSpirit start page. | FirstSpirit home page | 5.2.515, 5.2R6 |
| 192549 192547 192637 | <p>Missing library dependencies have been added for the FirstSpirit web application from the “fs-integration.fsm”, “fs-search.fsm” and “fs-security.fsm” modules. Updating these modules is recommended.</p> <p>Further information can be found in chapter “Modules (general): Library dependencies added in FirstSpirit web applications”.</p> | Module development, Modules | 5.2.515, 5.2R6 |
| 192582 | Improved loading performance of SiteArchitect after project selection. | SiteArchitect | 5.2.515, 5.2R6 |



| ID | Description | Categories | Version |
|--------|---|--|-------------------|
| 192639 | <p>As of the current FirstSpirit version, the new interface <code>ConnectionExtractor</code> (package <code>de.espirit.firstspirit.web</code>, FirstSpirit Developer API) is available.</p> <p>Further information can be found in chapter "Module Development, Scripts, API: New API interface "ConnectionExtractor" allows access to the connection of the logged-in user".</p> | Developer, FirstSpirit API | 5.2R16 |
| 192701 | The display has been improved when comparing versions of metadata. | SiteArchitect | 5.2R7 |
| 192718 | In SiteArchitect, improved consideration of the template set that is configured for a preview viewport (functionality "Multi Perspective Preview"). | Multi Perspective Preview, SiteArchitect | 5.2.515, 5.2R6 |
| 192721 | Uninstalling a defective module may have failed. | ServerManager | 5.2R7 |
| 192728 | Erroneous behavior could occur when creating images using the method <code>getImageFromIcon(Icon)</code> (interface <code>ImageAgent</code> , package <code>de.espirit.firstspirit.agency</code>). | FirstSpirit API | 5.2.515, 5.2R6 |
| 192742 | The method <code>checkAndThrow()</code> , part of the interface <code>ServerActionHandle</code> (FirstSpirit Access-API, Package <code>de.espirit.firstspirit.access</code>), has been optimized. | Developer, FirstSpirit API | 5.2.515, 5.2R6 |
| 192763 | Optimized logging for project components during server start-up. | Isolated mode (BETA) | 5.2.611, 5.2R7 |
| 192766 | <p>As of the current FirstSpirit version, the start-up process is considered to be finished before web application updates are performed.</p> <p>Further information can be found in chapter "Administration: Start-up process: FirstSpirit server starts up independently of web application updates".</p> | FirstSpirit Administrator | 5.2R6 |
| 192787 | In form, rule, and output channel editors of templates, using the action "Undo" (<code>Ctrl + Z</code>) could lead to erroneous behavior. | Developer, SiteArchitect, Template Store | 5.2.515, 5.2R6 |



| ID | Description | Categories | Version |
|--------|---|--|-------------------|
| 192826 | The performance has been optimized for the Mac OS X operating system when adding elements to the tree with drag-and-drop. | SiteArchitect | 5.2.518, 5.2R6 |
| 192866 | The recognition of file types when uploading media using drag-and-drop has been improved. Further information can be found in chapter “Media: Recognition of file types when uploading media using drag-and-drop improved”. | Editor, Media Store | 5.2.515, 5.2R6 |
| 192868 | For a user with server administrator privileges, “Administrator mode” was erroneously initially active in SiteArchitect (menu: “Project / Administrator mode”). | Server Administrator, SiteArchitect | 5.2.515, 5.2R6 |
| 192903 | Generating output of data sets from a content source using the function <code>contentSelect</code> did not work correctly in some cases. | Generation | 5.2.515, 5.2R6 |
| 192915 | FirstSpirit Server performance improvements in the “Send message” area (ServerManager: menu “Extras / Send message”). | Performance, Server Administrator | 5.2.515, 5.2R6 |
| 192943 | Corrected information about libraries in system web app components. | Isolated mode (BETA) | 5.2.611, 5.2R7 |
| 192956 | To improve traceability, improvements have been made to logging the server update schedule in the current FirstSpirit version. Further information can be found in chapter “Administration: Server update: Improved schedule logging”. | FirstSpirit Adminis- trator, Tasks | 5.2.515, 5.2R6 |
| 192962 | On the FirstSpirit start page, the user will now be notified about a failed login (invalid user name or password) with the message “Login to the server 'XYZ' failed!” | FirstSpirit home page | 5.2R10 |
| 192965 | Optimized modification detection of a page when adding a section via copy-and-paste. | SiteArchitect | 5.2.518, 5.2R6 |
| 193023 | Improvements in the area “Content Transport”. | Content Transport | 5.2.515, 5.2R6 |



| ID | Description | Categories | Version |
|--------|---|--|----------------|
| 193027 | Optimized the action “Undo” (Ctrl + Z) in form, rule, and output channel editors. | Developer, SiteArchitect, Template Store | 5.2.518, 5.2R6 |
| 193089 | Improved detection of identical or compatible module resources using unique identifiers (following the Maven schema) and the properties “version”, “minVersion”, and “maxVersion”. Further information can be found in chapter “Module Development, Scripts, API: Improved detection of identical or compatible module resources”. | Developer, Module development, Modules | 5.2R6 |
| 193107 | The way in which the FirstSpirit administrator user is handled in the case of special configurations has been improved. | FirstSpirit Administrator | 5.2R10 |
| 193131 | When editing content, clicking in the integrated preview could lead to erroneous behavior of keyboard control. | SiteArchitect | 5.2R8 |
| 193166 | As of the current version of FirstSpirit, the FirstSpirit server will recognize if web applications on a Tomcat running on a dedicated host are not up-to-date and will trigger an update. Further information can be found in chapter “Administration: Web server Apache Tomcat: Automatic update of web applications”. | Developer, FirstSpirit Administrator | 5.2R6 |
| 193181 | The behavior when changing the language or focus in the FS_CATALOG input component has been optimized. | Input Components | 5.2.515, 5.2R6 |
| 193207 | For newly-created sections, toggling the option “Include this section in the output” was erroneously not observed during rule evaluation if the page was already in edit mode. | Dynamic Forms | 5.2.615, 5.2R7 |
| 193244 | When installing the Launcher, problems could arise if multiple users used the same computer. | Launcher | 5.2R12 |
| 193249 | Cleanup of the repository files during archiving has been improved. | Archiving, FirstSpirit Administrator | 5.2.515, 5.2R6 |
| 193254 | File pointer management for socket connections has been improved. | Server Administrator | 5.2.515, 5.2R6 |



| ID | Description | Categories | Version |
|--------|---|---|-------------------|
| 193260 | Generation may have resulted in a malfunction. | Generation | 5.2.515, 5.2R6 |
| 193338 | Evaluation of the project property “Languages can be hidden” (“FirstSpirit ServerManager / Project / Properties / Options”) in SiteArchitect has been improved. | ServerManager, SiteArchitect | 5.2.515, 5.2R6 |
| 193389 | In rare cases, accessing the repository may have resulted in malfunctions. | FirstSpirit Adminis- trator, ServerManager | 5.2.515, 5.2R6 |
| 193395 | Updating icons and label of MenuItemsPlugin (Interface JavaClientEditorialToolbarItemsPlugin, Package de.espirit.firstspirit.client.plugin) has been improved. | SiteArchitect | 5.2.515, 5.2R6 |
| 193418 | Erroneous behavior could occur during start-up of FirstSpirit SiteArchitect if Websphere was used as an application server. | FirstSpirit Adminis- trator | 5.2R6 |
| 193440 | Recognition of file patterns in the context of archiving has been improved. | Archiving | 5.2R6 |
| 193454 | After changing and creating another version of a content package, the found dependency was erroneously logged as WARN instead of INFO. | Corporate Content | 5.2R20 |
| 193471 | The <code>getService(Class<T>)</code> method of the <code>ServicesBroker</code> interface (FirstSPIrit Access API, Package <code>de.espirit.firstspirit.access</code>) has been optimized. | FirstSpirit API, Perfor- mance | 5.2.515, 5.2R6 |
| 193493 | Rolling out a package in the target project may have resulted in a malfunction. | Corporate Content | 5.2.515, 5.2R6 |
| 193553 | Improved safeguard from erroneous path configurations for global web applications in the file <code>fs-server.conf</code> (parameters <code>WEB_DIR</code> , <code>WEBAPP_ROOT_PATH</code> , <code>WEBAPP_WEBEDIT5_PATH</code> , <code>WEBAPP_WEBMON_PATH</code> , <code>WEBAPP_STAGING_PATH</code> , and <code>WEBAPP_PREVIEW_PATH</code>). | FirstSpirit Adminis- trator | 5.2.518, 5.2R6 |
| 193563 | While using or updating the FOP module, erroneous behavior could occur. | FirstSpirit Adminis- trator, Modules, ServerManager | 5.2.518, 5.2R6 |



| ID | Description | Categories | Version |
|--------|--|--|----------------|
| 193594 | Optimized rule evaluation for option-based input components (e.g. CMS_INPUT_COMBOBOX) whose values are sourced from a database. | ContentCreator, Dynamic Forms | 5.2.611, 5.2R7 |
| 193645 | Optimized memory usage in ContentCreator. | ContentCreator | 5.2.518, 5.2R6 |
| 193684 | When using a nested FS_CATALOG input component, erroneous display could occur in the edit/"snippet" view. | Input Components, SiteArchitect | 5.2.611, 5.2R7 |
| 193689 | After updating a module via server properties in Server-Manager, the version of a web application associated with that module will now be displayed correctly in project properties. | Isolated mode (BETA) | 5.2.611, 5.2R7 |
| 193704 | Under certain circumstances, nesting of the input component FS_CATALOG could lead to erroneous behavior. | SiteArchitect | 5.2R12 |
| 193720 | The report sidebar is now resizable. Further information can be found in chapter "ContentCreator: Dynamically resizable report sidebar". | ContentCreator, Reports | 5.2R8 |
| 193724 | Optimized observation of activated editorial languages in forms. | ContentCreator | 5.2.518, 5.2R6 |
| 193872 | Erroneous behavior could occur when populating input components located in sub-forms via drag-and-drop. | Input Components, SiteArchitect | 5.2R6 |
| 193885 | When using multiple monitors, the position of SiteArchitect was erroneously not considered when displaying confirmation dialogs. | SiteArchitect | 5.2.615, 5.2R7 |
| 193889 | Erroneous behavior could occur when restarting the server via ServerMonitoring. | FirstSpirit Administrator | 5.2.518, 5.2R6 |
| 193911 | Improved observation of restrictions in the input component FS_REFERENCE when multiple remote connections to the own project are used. | Input Components, SiteArchitect | 5.2.615, 5.2R7 |
| 193916 | Improved preview of the selected datasets when using "Multi Perspective Preview" (MPP). | Multi Perspective Preview, SiteArchitect | 5.2.518, 5.2R6 |
| 193930 | In very rare cases, using code completion in the form could cause erroneous behavior. | Template Development | 5.2.615, 5.2R7 |



| ID | Description | Categories | Version |
|--------|---|---|----------------|
| 193936 | Undesired notifications may have been shown to a user on pages for which he/she only had the permission “Visible”. | Permissions, SiteArchitect | 5.2.518, 5.2R6 |
| 193976 | In the selection dialog, optimized loading behavior of the preview image. | SiteArchitect | 5.2R7 |
| 193989 | Optimized layout of tree node labels in the input component CMS_INPUT_PERMISSION. | ContentCreator | 5.2.518, 5.2R6 |
| 194012 | Improved rule-based control for editing entries of the input components FS_CATALOG and FS_INDEX. | Input Components, SiteArchitect | 5.2.518, 5.2R6 |
| 194035 | Improved focus behavior when scrolling or making selections in the input component CMS_INPUT_DOM. | Input Components, SiteArchitect | 5.2.518, 5.2R6 |
| 194046 | The process of cropping images has been improved. | Media Store, SiteArchitect | 5.2R10 |
| 194156 | When previewing entries of the input component FS_INDEX, the “Refresh” button in the main toolbar was erroneously deactivated. | SiteArchitect | 5.2R19 |
| 194162 | Erroneous behavior could occur when displaying the input component FS_LIST (type DATABASE) in a dataset form. | Input Components, SiteArchitect | 5.2.518, 5.2R6 |
| 194184 | Optimized detection of incompatible module resources. | Isolated mode (BETA) | 5.2.611, 5.2R7 |
| 194190 | Deregistering a cluster slave server from the cluster master server via ServerManager could temporarily lead to the deregistered slave server no longer restarting automatically. | Server Administrator, ServerManager | 5.2.611, 5.2R7 |
| 194243 | Synchronization issues could arise in language-independent input components while editing the form in multiple languages. | Input Components, SiteArchitect | 5.2R6 |
| 194262 | Improved performance when editing data sources. | Content Store, Performance, SiteArchitect | 5.2.518, 5.2R6 |
| 194325 | Synchronizing between workspace and the preview area after saving changes in forms has been optimized. | Preview, SiteArchitect, Template Store | 5.2.518, 5.2R6 |
| 194335 | Highlighting of entries of a report when moving the mouse pointer over an element has been improved. | Reports, SiteArchitect | 5.2.518, 5.2R6 |



| ID | Description | Categories | Version |
|------------------|--|---|-------------------|
| 194349 | Improved display logic for workflows in the status bar. | SiteArchitect, Workflow | 5.2.611, 5.2R7 |
| 194353 | Inserting and filling new lines in CMS_INPUT_DOMTABLE input component has been improved. | ContentCreator, Input Components | 5.2R6 |
| 194354 | Erroneous behavior could occur when creating a database schema from an external database. | Database, SiteArchitect | 5.2R6 |
| 194362 | During archiving, inbound references are now also considered. | Archiving | 5.2.611, 5.2R7 |
| 194367 | Optimized loading of action groups of MenuItemsPlugin (interface <code>JavaClientEditorialToolbarItemsPlugin</code> , package <code>de.espirit.firstspirit.client.plugin</code>). | SiteArchitect | 5.2.611, 5.2R7 |
| 194369 | Modified logging during FirstSpirit server start-up for the case that web applications are running on an external Tomcat. | FirstSpirit Administrator | 5.2.615, 5.2R7 |
| 194421 | When creating a database schema from an external database, problems in accessing foreign key columns could occur. | Database | 5.2.611, 5.2R7 |
| 194436 195017 | Optimized performance when editing datasets that are displayed within the form of an input component FS_LIST (type DATABASE). | Content Store, Performance, SiteArchitect | 5.2R6 |
| 194449 | During an export, the folder “Lost & Found” will no longer be exported. This behavior may be controlled via a new API method. Further information can be found in chapter “External Synchronization: Export: Folder “Lost & Found” will no longer be exported”. | External synchronization | 5.2R14 |
| 194524 | Erroneous behavior could occur when using the methods <code>hasGui()</code> and <code>getGui(Frame)</code> of the interface <code>Configuration</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.module</code>). | Developer, Modules | 5.2.615, 5.2R7 |



| ID | Description | Categories | Version |
|--------|---|--|----------------|
| 194569 | <p>Aborting workflows from within the task list now requires at least project administrator privileges.</p> <p>Further information can be found in chapter “SiteArchitect: Workflows / Task list: Aborting workflows now requires project administrator privileges”.</p> | Permissions, SiteArchitect, Workflow | 5.2R10 |
| 194589 | Optimized performance of loading data sources with datasets which contain an input component of type FS_INDEX. | Performance, SiteArchitect | 5.2.611, 5.2R7 |
| 194616 | Improved rules evaluation in the input component CMS_INPUT_LINK. | Dynamic Forms, SiteArchitect | 5.2.615, 5.2R7 |
| 194618 | Improved focus behavior when scrolling or making selections in the input component CMS_INPUT_DOMTABLE. | Input Components, SiteArchitect | 5.2R6 |
| 194677 | You can suppress the media preview in the project properties in the ServerManager. This setting is now correctly evaluated in the SiteArchitect. | Preview, SiteArchitect | 5.2R13 |
| 194689 | <p>A confirmation dialog now warns a user if an element is about to be deleted which is still bookmarked as a master copy.</p> <p>Further information can be found in chapter “ContentCreator: Deletion of bookmarks and master copies”.</p> | Bookmarks, Content-Creator, Editor | 5.2.611, 5.2R7 |
| 194719 | Optimized performance of loading the data source overview with datasets whose forms contain an FS_INDEX input component with many referenced datasets. | Content Store, Input Components, SiteArchitect | 5.2.611, 5.2R7 |
| 194723 | In order to rename objects in the tree, the function key F2 may be used as an alternative to the function key F9 . | SiteArchitect | 5.2R6 |
| 194725 | <p>As of the current FirstSpirit version, Microsoft SQL Server, version 2016, is officially supported for use with FirstSpirit as a database server running on Windows servers.</p> <p>Further information can be found in chapter “General: Databases: Support for Microsoft SQL Server 2016 and data type "ntext””.</p> | Database | 5.2R10 |



| ID | Description | Categories | Version |
|------------------|--|--|-------------------|
| 194731 | <p>As of the current FirstSpirit version, MariaDB is officially supported for use with FirstSpirit.</p> <p>Further information can be found in chapter “General: Databases: Support for MariaDB”.</p> | Database | 5.2R12 |
| 194744 | Improved stability of connections between SiteArchitect and server. | SiteArchitect | 5.2R6 |
| 194780 | <p>If an FS_INDEX input component does not contain any entries, the new method <code>.isEmpty()</code> returns <code>true</code>.</p> <p>Further information can be found in chapter “Input components: FS_INDEX: Emptiness check with <code>.isEmpty()</code>”.</p> | Input Components, Template Development | 5.2.611, 5.2R7 |
| 194838 | Improved the display of web components in project properties. | ServerManager | 5.2.611, 5.2R7 |
| 194843 | <p>When using the FirstSpirit module “OfficeConnect”, contents from the clipboard can now be pasted as plain text - without formatting, links, images, etc. - via the keyboard shortcut <code>Ctrl + Shift + V</code>.</p> <p>Further information can be found in chapter “Modules: Office-Connect: Pasting as plain text with <code>Ctrl+Shift+V</code>”.</p> | Clipboard, Editor, Modules, SiteArchitect | 5.2R11 |
| 194847 194849 | Optimized performance when selecting objects in the tree. | Performance, SiteArchitect | 5.2R6 |
| 194851 | When the browser Mozilla Firefox was used, inputting text following a link in a table cell could cause erroneous behavior. | ContentCreator | 5.2R18 |
| 194853 | In the input component CMS_INPUT_DOM, corrected copying of links between different languages. | ContentCreator | 5.2.615, 5.2R7 |
| 194860 | Improved evaluation of settings for browser, office, and graphics engine. | SiteArchitect | 5.2R6 |
| 194862 | Optimized notification about rule infractions related to subforms of the input component FS_LIST. | Dynamic Forms, SiteArchitect | 5.2.611, 5.2R7 |



| ID | Description | Categories | Version |
|--------|---|--|-------------------|
| 194868 | When adding a table template to a feature, the schema node was erroneously not considered a required reference. This could lead to erroneous behavior when installing the feature. | Content Transport | 5.2R8 |
| 195010 | <p>The <code>VersionInfo</code> object returned by the interface <code>ServerInformationAgent</code> (FirstSpirit Access API, package <code>de.espirit.firstspirit.agency</code>) now provides information about the currently active server mode (“Legacy” or “Isolated”).</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Identification of server mode (isolated vs. legacy)”.</p> | Developer, FirstSpirit API, Isolated mode (BETA), Module development | 5.2.611, 5.2R7 |
| 195014 | <p>Optimized the order of (image) resolutions which are transported from a source project into a target project using FirstSpirit ContentTransport or External Synchronization.</p> <p>Further information can be found in chapter “Modules: Corporate Content: Multisite Management: Export of image resolutions”.</p> | Content Transport, External synchronization | 5.2.611, 5.2R7 |
| 195024 | In external synchronization, unnecessary updates are now avoided during import. | External synchronization | 5.2.611, 5.2R7 |
| 195054 | Enhanced logging in the module “FirstSpirit DynamicPersonalization”. | Modules | 5.2.611, 5.2R7 |
| 195163 | Identical resources have been consolidated when using more than one project-specific web component. | Modules, Server Administrator | 5.2.611, 5.2R7 |
| 195195 | Improved consideration of authorized users during mail dispatch in workflows. | Workflow | 5.2.611, 5.2R7 |
| 195203 | In the overview of the input component <code>FS_LIST</code> (type <code>DATABASE</code>), erroneous behavior could occur in the display of columns mapped to N:M foreign key relationships. | Input Components, SiteArchitect | 5.2R6 |



| ID | Description | Categories | Version |
|--------|---|--|----------------|
| 195216 | <p>From the current FirstSpirit version onwards, an internal web server URL may be configured for web server.</p> <p>Further information can be found in chapter “Administration: Updating web applications on external web servers”.</p> | FirstSpirit Administrator, ServerManager | 5.2.615, 5.2R7 |
| 195262 | <p>The new method <code>getServerName()</code> (Interface <code>ServerInformationAgent</code>, FirstSpirit Access-API) returns the server's hostname.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Getting the host name per API (interface “ServerInformationAgent”)”.</p> | FirstSpirit API | 5.2R10 |
| 195277 | Improved stability in integrated preview when using the browser engine “Internet Explorer”. | Preview, SiteArchitect | 5.2.611, 5.2R7 |
| 195299 | Optimized indexing performance. | SiteArchitect | 5.2R8 |
| 195314 | Optimized status detection for the menu entry “View” / “Display area of AppCenter / Preview”. | SiteArchitect | 5.2.611, 5.2R7 |
| 195407 | <p>New interface <code>ProjectCleanupTask</code> in the package <code>de.espirit.firstspirit.access.schedule</code> (FirstSpirit Developer API) allows for creating and configuring archival schedule actions.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Schedules: Creating and configuring an archival schedule action via API (<code>de.espirit.firstspirit.access.schedule.ProjectCleanupTask</code>)”.</p> | Advanced URL, Archiving, Developer, FirstSpirit API, Tasks | 5.2R9 |
| 195471 | Optimized performance of saving datasets whose forms contain an FS_LIST input component (type DATABASE) with many referenced datasets. | SiteArchitect | 5.2.611, 5.2R7 |
| 195482 | Corrected the return value of the statement <code>\$CMS_REF(. . .)\$</code> when using the optional parameter <code>abs : 2</code> . | Developer, Template Development | 5.2.611, 5.2R7 |
| 195523 | The update process of global web applications when updating the FirstSpirit server has been improved. | Server Administrator | 5.2R7 |



| ID | Description | Categories | Version |
|--------|--|------------------------------------|-------------------|
| 195526 | During import, certain specific circumstances could lead to elements in the external file system being mistakenly deleted if, previously, local changes were made in the target project that differed from the exported state. | External synchron- ization | 5.2.611, 5.2R7 |
| 195538 | Performance improvements related to the Page Content store when saving a page with many sections. | SiteArchitect | 5.2.615, 5.2R7 |
| 195542 | A defective display of the menu bar in ContentCreator could occur after deleting a table template in SiteArchitect | ContentCreator | 5.2R7 |
| 195581 | In very rare cases, using the input component FS_INDEX within a language-dependent FS_CATALOG input component could cause erroneous behavior. | ContentCreator | 5.2.615, 5.2R7 |
| 195588 | Improved identification of invalid references in the input component FS_LIST (type DATABASE). | Input Components, SiteArchitect | 5.2.611, 5.2R7 |
| 195603 | Improved display of the results of a query in the query template. | SiteArchitect, Template Store | 5.2.611, 5.2R7 |
| 195642 | In certain circumstances, switching between languages in the workspace area could lead to erroneous behavior. | SiteArchitect | 5.2.611, 5.2R7 |
| 195692 | In rare cases, setting focus on an object could lead to an erroneous state of action buttons. | SiteArchitect | 5.2.611, 5.2R7 |
| 195707 | Optimized performance of calculating the page preview with many database-based input components of type CMS_INPUT_COMBOBOX. | Performance, Preview | 5.2.611, 5.2R7 |
| 195760 | Improved cluster generation on slave servers. | Generation | 5.2R12 |
| 195823 | In image galleries (input component FS_LIST, type DATABASE with <MEDIAMODE> tag), a manually created sort order of entries was erroneously not observed. | Input Components, SiteArchitect | 5.2.615, 5.2R7 |
| 195943 | Optimized search for datasets in the selection dialog of the input component FS_LIST. | Input Components | 5.2R8 |



| ID | Description | Categories | Version |
|--------------------------------------|--|---|----------------|
| 195947 | <p>As of the current FirstSpirit version, user interface elements in ContentCreator (e.g. menus “Contents”, “Media”, and “Actions”; menu entries; input components; and report parameters) are identified in HTML.</p> <p>Further information can be found in chapter “ContentCreator: Identification of user interface elements”.</p> | ContentCreator, Developer, FirstSpirit API | 5.2R7 |
| 195999 | <p>Optimized transport of table templates into a target project with a different language set.</p> <p>Further information can be found in chapter “Modules: Corporate Content: Multisite Management: Transport of table templates into projects with different language counts”.</p> | Content Transport, SiteArchitect, Table templates | 5.2.615, 5.2R7 |
| 196034 | In SiteArchitect running on macOS, use of the input component FS_LIST could lead to limited operability of SiteArchitect. | Input Components, SiteArchitect | 5.2.611, 5.2R7 |
| 196043 | If a table template lacked definition of a preview page, refreshing the page could lead to an erroneous display in the preview. | ContentCreator | 5.2R8 |
| 196051 194654 194798 196699 | <p>In the course of export format readjustment, an export will now only create one directory named <code>.FirstSpirit</code> instead of creating several directories of that name. Furthermore, the contents of the files <code>Info.txt</code> and <code>Files.txt</code>, which also contain internal meta information, have been changed, and the files have been renamed to <code>FS_Info.txt</code> and <code>FS_Files.txt</code>, respectively. In this context, the format of the file <code>Entities.xml</code>, which contains contents of datasets, has been changed as well.</p> <p>Further information can be found in chapter “External Synchronization: General changes to the data format”.</p> | External synchronization | 5.2R14 |



| ID | Description | Categories | Version |
|--------|---|----------------------------|----------------|
| 196052 | <p>In addition to providing information about files which were created in, deleted from, or updated in the file system during an export, the interface <code>ExportOperation.Result</code> now includes newly implemented methods which provide information about moved files as well as other information (FirstSpirit Developer API, package <code>de.espirit.firstspirit.store.access.n-export.operations</code>, interface <code>ExportOperation.Result</code>).</p> <p>Further information can be found in chapter “External Synchronization: Export: Additional information about exported files (interface “ExportOperation.Result”)”.</p> | External synchronization | 5.2R14 |
| 196122 | The detection of CSS mapping files (<code>*.css.map</code>) during an upload with drag and drop has been improved. | Media Store, SiteArchitect | 5.2R7 |
| 196130 | When editing content using the “InEdit” function in the <code>CMS_INPUT_RADIOBUTTON</code> input component (single selection from a displayed list), the options could be displayed incorrectly. | ContentCreator | 5.2R13 |
| 196245 | <p>Deleted features may now be removed from the FirstSpirit repository via an archival schedule action.</p> <p>Further information can be found in chapter “Modules: Corporate Content: ContentTransport: Archival of deleted feature collections”.</p> | Content Transport | 5.2R7 |
| 196290 | In rare cases, the tag “style” could be stored multiple times when saving format templates. | Developer | 5.2.615, 5.2R7 |
| 196326 | Corrected version information about standard components of the system module. | Server Administrator | 5.2.611, 5.2R7 |
| 196370 | Improved Java compatibility during FirstSpirit installation on Linux. | FirstSpirit Administrator | 5.2.615, 5.2R7 |
| 196387 | In “Online Documentation for FirstSpirit” (ODFS), improved display of the version information “Available since” for API methods of data types. | Developer | 5.2R7 |



| ID | Description | Categories | Version |
|--------|--|--|-------------------|
| 196420 | Optimized highlighting and editing of values in the input component FS_INDEX. | ContentCreator | 5.2R7 |
| 196430 | Improved error message when uploading images with unmet criteria. | FirstSpirit API | 5.2.615, 5.2R7 |
| 196442 | When using external logic in dynamic forms, setting a value in the input component CMS_INPUT_TEXT could cause erroneous behavior. | Dynamic Forms, Template Development | 5.2.615, 5.2R7 |
| 196444 | Improvements related to the Template Wizard. | Template Wizard | 5.2.615, 5.2R7 |
| 196465 | Optimized detection of invalid references in the input component FS_REFERENCE. | SiteArchitect | 5.2R8 |
| 196496 | Optimized the method <code>reload(Element)</code> (JavaScript API, JavaScript object: <code>top.WE_API.Preview</code>), which is used to update part of a document. | ContentCreator | 5.2.615, 5.2R7 |
| 196545 | Erroneous behavior could occur when the “pluggability” feature (Java Servlet Specification 3.0) was deactivated. | FirstSpirit Adminis- trator | 5.2.615, 5.2R7 |
| 196612 | In the input component CMS_INPUT_DOMTABLE, saving links could lead to erroneous behavior. | ContentCreator | 5.2.615, 5.2R7 |
| 196619 | Optimized detection of duplicate module resources. | Isolated mode (BETA) | 5.2R8 |
| 196695 | Optimized detection of invalid references in the input component FS_REFERENCE. | ContentCreator | 5.2R8 |
| 196743 | Improved detection of rule infractions for links within the input components CMS_INPUT_LINK, CMS_INPUT_IMAGEMAP, and CMS_INPUT_DOM. | Dynamic Forms, SiteArchitect | 5.2R8 |
| 196747 | During a metadata search, malfunctions could occur when entering search terms. | Search, SiteArchitect | 5.2R8 |
| 196753 | Improved initialization of the class loader in SiteArchitect. | Isolated mode (BETA) | 5.2.615, 5.2R7 |
| 196763 | Improved display of keyboard shortcuts in tool tips. | SiteArchitect | 5.2.615, 5.2R7 |



| ID | Description | Categories | Version |
|--------|---|---|----------------|
| 196775 | The version history for datasets has been optimized. | Content Store, SiteArchitect, Version history | 5.2R8 |
| 196874 | In non-Webstart environments (Launcher), the menu entry “Switch Projects” was erroneously active. | SiteArchitect | 5.2.615, 5.2R7 |
| 196892 | During generation an erroneous display could happen rarely when using the Tomcat web server. | ContentCreator | 5.2R7 |
| 197095 | Optimized copying of content into the FirstSpirit clipboard via the keyboard shortcut <code>Ctrl + C</code> . | Clipboard, SiteArchitect | 5.2R10 |
| 197130 | Modifying the input component FS_LIST via a script during generation could lead to erroneous behavior. | Generation | 5.2R15 |
| 197189 | Improved identification of *.msg files (e-mails in Microsoft Outlook) when uploading files via drag-and-drop. | Media Store, SiteArchitect | 5.2R8 |
| 197199 | Restoring revisions resulted in a malfunction on pages if the child list had been changed by means of a previous restoration process. | SiteArchitect | 5.2R9 |
| 197274 | In rare cases, after changing the repository type from “Berkley DB Java Edition V5” to “Berkley DB Java Edition V3”, the conversion process may use more disk space than normal. | FirstSpirit Administrator, Repository | 5.2R8 |
| 197406 | Improved performance of client logging. | ServerManager, SiteArchitect | 5.2R8 |
| 197485 | Client logging has been optimized for the ServerManager. | ServerManager | 5.2R13 |
| 197564 | <p>During an import into a target project, implicitly exported objects will now only be created in the target project if they are not present there and will no longer be updated if they are already present in the target project.</p> <p>Further information can be found in chapter “External Synchronization: Export: Explicitly and implicitly selected objects”.</p> | External synchronization | 5.2R14 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 197585 | Invocation of the context menu item “Corporate Content / Rebind original” on a format template could cause erroneous behavior. | Corporate Content, FirstSpirit Administrator, SiteArchitect, Template Store | 5.2R7 |
| 197715 | When editing media elements with the file name extension “config”, saving the element erroneously led to the extension being changed. | Media Store, SiteArchitect | 5.2R7 |
| 197729 | For new installations of FirstSpirit, the Jetty option “ForwardRequestCustomizer” for evaluating information regarding reverse proxies will now be set by default. | Server Administrator | 5.2R7 |
| 197817 | File extensions can now be assigned to a desired MIME type using the new <code>mime.types.additional</code> parameter in the <code>fs-server.conf</code> configuration file. Further information can be found in chapter “Administration: Media: Assigning File Extensions to MIME Types”. | FirstSpirit Administrator, Media Store | 5.2R10 |
| 197865 | With certain specific configurations, in rare cases, erroneous behavior could occur when updating the subscription in the target project. | Corporate Content | 5.2R10 |
| 197873 | In rare cases, erroneous behavior could occur when iterating through the objects of the interface <code>Index</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.client.access.editor.lists</code>). | Developer, FirstSpirit API | 5.2R7 |
| 197955 | The detection of changes while renaming the display name of an element in the edit mode has been improved. | SiteArchitect | 5.2R13 |
| 197994 | If meta files are missing (empty directory structures), an error message will be output if an export or an import is attempted, and the export/import will be prevented. If <code>deleteObsoleteFiles</code> is set to “true”, an export will only log a warning. Further information can be found in chapter “External Synchronization: Detection of empty directory structures (missing meta files)”. | External synchronization | 5.2R14 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 198064 | Changes to the name of a server-wide action template is now taken into account during use for references within project schedules. | ServerManager | 5.2R14 |
| 198068 | Erroneous behavior could occur when editing a language-dependent input component FS_CATALOG within a language-dependent input component FS_LIST (type DATABASE). | ContentCreator | 5.2R7 |
| 198078 | In the input component FS_INDEX, dynamically populating a parameter in a query using rules could lead to erroneous behavior. | Dynamic Forms, SiteArchitect | 5.2R8 |
| 198086 | As of the current FirstSpirit version, it is possible to more precisely control indexing of referenced datasets. Further information can be found in chapter “Search: Controlling indexing of referenced datasets”. | Content Store, Developer, FirstSpirit API, Indexing, Input Components, Performance, Search | 5.2R12 |
| 198214 | During generation of Advanced URLs, erroneous behavior could occur if a structure folder had a display name that contained a special character. | Generation | 5.2R8 |
| 198269 | In the input component CMS_INPUT_DOM, improved pasting of Word content from the clipboard. | ContentCreator | 5.2R8 |
| 198303 | Optimized persistence of fixed workspaces. | SiteArchitect | 5.2R8 |
| 198337 | Changed the default value of the method <code>setDeleteObsoleteFiles(boolean enable)</code> of the interface <code>ExportOperation</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.store.access.n-export.operations</code>) from <code>false</code> to <code>true</code> and implemented additional log output. Further information can be found in chapter “External Synchronization: Deletion of obsolete files and additional logging”. | Developer, External synchronization, FirstSpirit API | 5.2R7 |
| 198355 | Erroneous behavior could arise after deleting an entry of the input component FS_CATALOG. | SiteArchitect | 5.2R19 |



| ID | Description | Categories | Version |
|--------|---|---------------------------------------|---------|
| 198365 | When using the browser engine “Google Chrome” in the integrated preview, downloading a video in mp4 format could lead to erroneous behavior. | SiteArchitect | 5.2R8 |
| 198375 | <p>The method <code>getProblems</code> of the <code>ImportOperation.Result</code> interface (FirstSpirit Developer API, <code>de.espirit.firstspirit.store.access.nextport.operations</code>) can be used to output problems that occurred during an import.</p> <p>If, during the process of distributed development, two developers create new elements with the same “UID”, the GID (“Global ID”) of the element will be updated</p> <p>So far, this update has had the log level “Warning” and was part of the log output of <code>getProblems</code>. The log level was changed to “Info” with the current FirstSpirit version. For this reason, this log message will no more appear in <code>getProblems</code> of the result (<code>ImportOperation.Result</code>).</p> | Developer, External synchronization | 5.2R7 |
| 198432 | Erroneous behavior could occur when editing links in an input component <code>CMS_INPUT_DOM</code> which is contained within the form of an <code>FS_LIST</code> entry. | SiteArchitect | 5.2R7 |
| 198451 | The validation of language independent input components was improved. | ContentCreator, SiteArchitect | 5.2R10 |
| 198508 | Improvements of the LiveEdit functionality. | ContentCreator | 5.2R19 |
| 198512 | In rare cases, erroneous behavior could occur when loading the project. | SiteArchitect | 5.2R8 |
| 198533 | Improved display of available resolutions in the input component <code>CMS_INPUT_IMAGE_MAP</code> . | ContentCreator | 5.2R8 |
| 198560 | Generation on a cluster node could lead to erroneous behavior. | FirstSpirit Administrator, Generation | 5.2R9 |
| 198570 | <p>Use the Customize layout icon in the top right-hand corner to switch between the “Thumbnail” and “List view” views.</p> <p>Further information can be found in chapter “SiteArchitect: List view at folder level in the Media Store”.</p> | Editor, Media Store, SiteArchitect | 5.2R13 |



| ID | Description | Categories | Version |
|--------|--|------------------------------------|---------|
| 198594 | The libraries of the “FirstSpirit BasicSearch” module have been updated. | FirstSpirit Administrator, Modules | 5.2R9 |
| 198603 | Improved performance of searches for invalid references. | Performance | 5.2R17 |
| 198609 | In the functionality “External Synchronization”, exporting unmodified entities erroneously led to the associated metadata files being written anew. | External synchronization | 5.2R7 |
| 198639 | The cropping function for alternative pictures of a specific resolution was improved. | Media Store, SiteArchitect | 5.2R9 |
| 198687 | <p>When importing datasets, it is now possible to distinguish between newly created and modified datasets by using the newly implemented method <code>getUpdatedEntities()</code> in the interface <code>ImportOperation.Result</code>.</p> <p>Further information can be found in chapter “External Synchronization: Import: Identification of new and modified datasets using API (interface “ImportOperation.Result”)”.</p> | External synchronization | 5.2R14 |
| 198763 | In external synchronization, optimized the import of form default values. | External synchronization | 5.2R8 |
| 198781 | The display of rule violations has been improved. | ContentCreator, Dynamic Forms | 5.2R9 |
| 198800 | Closing a dialog that was defined via the interface <code>ShowFormDialogOperation</code> (package <code>de.espirit.firstspirit.ui.operations</code> , FirstSpirit Developer API) erroneously led to the entire page being refreshed. | ContentCreator | 5.2R8 |
| 198826 | Selecting a link in the integrated preview now reliably opens up the desired presentation channel. | SiteArchitect | 5.2R19 |
| 198865 | Respecting formatted contents in the input components <code>CMS_INPUT_DOM</code> and <code>CMS_INPUT_DOMTABLE</code> was optimized. | Input Components, SiteArchitect | 5.2R9 |
| 198946 | Using the “Google Chrome” browser within the integrated preview could lead to erroneous behavior after having changed the font size within the operating system. | Preview, SiteArchitect | 5.2R9 |



| ID | Description | Categories | Version |
|--------|---|-------------------------------|---------|
| 198966 | Some users experienced errors in ContentCreator sessions. The handling of <code>editorId</code> attributes is now improved. | ContentCreator | 5.2R10 |
| 198973 | Improvements related to signing of FirstSpirit JAR files. | FirstSpirit Administrator | 5.2R8 |
| 198975 | The selection of data sets has been optimized for the input component <code>FS_DATASET</code> . | ContentCreator | 5.2R9 |
| 198990 | Default values were erroneously not taken into account when importing with external synchronization. | External synchronization | 5.2R8 |
| 198993 | As of the current version of FirstSpirit, English-language stop words will be added to the search index during indexing. Further information can be found in chapter “SiteArchitect / ContentCreator: Optimized Search”. | Editor, Search, SiteArchitect | 5.2R18 |
| 199057 | The current logging may be displayed in a separate window using the menu entry “View Log” in the menu “Help”. Searching in the log messages has been improved. | ServerManager, SiteArchitect | 5.2R9 |
| 199071 | Erroneous behavior could occur while editing datasets. | SiteArchitect | 5.2R10 |
| 199091 | Erroneous behavior could arise during creation of portal entry points (FirstSpirit module “SAP Business Package for FirstSpirit”). | Modules | 5.2R20 |
| 199097 | If only parts of the Page Content or Site Structure stores were exported from a source project, this erroneously led to these parts always being imported anew in the target project. | External synchronization | 5.2R8 |
| 199124 | Optimized evaluation of the option “Extended logging” (menu “Extras”). | SiteArchitect | 5.2R8 |
| 199149 | The parameters <code>jdbc.POOLMIN</code> and <code>jdbc.POOLMAX</code> can be used to specify values in the JDBC configuration of databases which define the number of available database connections reserved for each pool. The establishment and release of these connections was optimized. | FirstSpirit Administrator | 5.2R9 |



| ID | Description | Categories | Version |
|------------------|---|---|---------|
| 199159 | In repeat imports, elements that are both in a released state and unchanged in the target project were erroneously imported anew. | External synchronization | 5.2R8 |
| 199179 | The storage location of log messages for ServerManager and SiteArchitect can now be configured - server-wide for all users via the <code>fs-server.conf</code> using the parameter <code>CLIENT_HOME_DIR</code> or one of the operating-system specific parameters (e. g. <code>CLIENT_HOME_DIR_WINDOWS</code>) or user-specific via the corresponding parameters in the connection settings. Further information can be found in chapter "SiteArchitect / ServerManager: Configurable directory for log messages". | FirstSpirit Administrator, Server Administrator, ServerManager, SiteArchitect | 5.2R10 |
| 199208 | Improved evaluation of rules in child forms of the input components <code>FS_LIST</code> . | Dynamic Forms, SiteArchitect | 5.2R11 |
| 199210 200733 | In rare cases, pop-up dialogs were opened in the background when using the operating system macOS. | SiteArchitect | 5.2R10 |
| 199248 | Improved logging when rolling out packages. | Corporate Content | 5.2R12 |
| 199336 | In the current FirstSpirit version, updated internally used software (JDK in FirstSpirit Launcher). Further information can be found in chapter "System: Integrated Software". | Integrated software | 5.2R12 |
| 199403 | Editing a form using EasyEdit could lead to erroneous behavior. | ContentCreator | 5.2R9 |
| 199443 | Improved user interaction pattern of creating a dataset. | Content Store, ContentCreator | 5.2R12 |
| 199453 | Improved display of errors of type "FATAL" in ServerMonitoring. | ServerMonitoring | 5.2R12 |
| 199483 | Improved update process for global web applications. | FirstSpirit Administrator, Modules | 5.2R12 |
| 199484 | Improved deployment of custom global web applications. | Server Administrator | 5.2R12 |



| ID | Description | Categories | Version |
|--------|--|---------------------------------|---------|
| 199607 | With special configurations, problems with the sort order for entries could arise in the FS_LIST input component. | Input Components, SiteArchitect | 5.2R10 |
| 199628 | The content of FirstSpirit JAR files is signed with a certificate. In the current FirstSpirit version, the content is signed with a new certificate that is valid until 2019-07-24 (24 July 2019). Further information can be found in chapter “General: Code signing certificate updated”. | Webstart | 5.2R9 |
| 199837 | Displaying the change date of datasets in the overview and sorting by the date of the latest change have been improved. | SiteArchitect | 5.2R13 |
| 199942 | In “Health Center” (ServerMonitoring), checking for the update status of a FirstSpirit server could under certain preconditions lead to erroneous behavior. | Health Center | 5.2R15 |
| 199943 | For pop-up dialogues created via the <code>RequestOperation</code> interface (FirstSpirit Developer-API, Package <code>de.espirit.firstspirit.ui.operations</code>) the scrolling behavior was improved. | ContentCreator | 5.2R10 |
| 199947 | Optimized creation of features that include datasets in projects which do not work with releases (“autorelease mode”). | Content Transport | 5.2R10 |
| 199949 | With the current FirstSpirit version, log messages for the browser engine used for the integrated preview are now also retained under <code>.firstspirit*/logs/SiteArchitect*.log</code> . Further information can be found in chapter “SiteArchitect: Logging the Integrated Preview (Browser Engines)”. | SiteArchitect | 5.2R10 |
| 199969 | Improved management of technical user sessions. | Sessions | 5.2R12 |
| 199983 | Starting with the current FirstSpirit version, the documentation of the FirstSpirit API is published additionally in separate Jar files. Further information can be found in chapter “General: Publication of FirstSpirit Javadoc via separate Jar files”. | Developer, FirstSpirit API | 5.2R9 |



| ID | Description | Categories | Version |
|--------|---|--|---------|
| 199993 | When releasing datasets with N:M relationships, erroneous behavior could occur. | SiteArchitect | 5.2R10 |
| 200046 | During every start of SiteArchitect or ServerManager, all <code>.firstspirit_*</code> directories in which no files were changed over the last 30 days will now be deleted. Further information can be found in chapter “Administration: Automatic deletion of files from local user directories”. | Editor, FirstSpirit Administrator, Server-Manager, SiteArchitect | 5.2R15 |
| 200055 | As of the current version of FirstSpirit, media constraints may be based upon either file name extensions or MIME type detection. Further information can be found in chapter “Administration: Media Constraints: MIME Type Detection”. | FirstSpirit Administrator, Media Constraints, Server-Manager | 5.2R17 |
| 200145 | The process of setting up the Launcher has been improved. | Launcher | 5.2R10 |
| 200201 | Temporal facets of search will now be evaluated correctly again. | ContentCreator, Search | 5.2R12 |
| 200278 | “External Synchronization” no longer updates/modifies database schemata for which the options “Read-only” and “No schema sync” are set. | External synchronization | 5.2R14 |
| 200316 | Optimized roll-out behavior of project-local web applications. | Server Administrator | 5.2R17 |
| 200318 | Under certain conditions, reports were erroneously displayed as inactive. | ContentCreator | 5.2R10 |
| 200361 | During an import, dependencies will now be checked and the import will be aborted if this import would cause required missing dependencies in the target project. Further information can be found in chapter “External Synchronization: Import: Abort in case of required but missing objects”. | External synchronization | 5.2R14 |
| 200362 | When transferring changes between projects with different language sets, using default values could erroneously lead to manually set values not being preserved. | Corporate Content | 5.2R12 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 200364 | Inserting formatted text when using the module “Office-Connect” has been improved. | Modules | 5.2R10 |
| 200424 | The method <code>installFeature(FeatureFile, LayerMapper)</code> , part of the interface <code>FeatureInstallAgent</code> (FirstSpirit Developer-API, Package <code>de.espirit.firstspirit.feature</code>), has been optimized. | Content Transport, External synchronization, FirstSpirit API | 5.2R11 |
| 200488 | From within a script, dialogs may be opened and forms may be displayed and modified using the FirstSpirit API. In this context, erroneous behavior could arise when setting values for the input component <code>FS_REFERENCE</code> . | Developer, SiteArchitect | 5.2R12 |
| 200507 | In the GOM implementation class <code>GomButton</code> , the type of the attributes <code>onClick</code> and <code>onDrop</code> has been changed from <code>String</code> to <code>GomButtonScriptReference</code> . Programmatic uses of this class may require modifications to their source code in order to observe this type change. Further information can be found in chapter “Module Development, Scripts, API: Changes to GOM implementation class “GomButton””. | Developer, FirstSpirit API, Input Components | 5.2R14 |
| 200581 | On the operating system Microsoft Windows, the parameter <code>WEBAPP_STAGING_PATH</code> in the file <code>fs-server.conf</code> no longer distinguishes between uppercase and lowercase characters in the path value. | FirstSpirit Administrator | 5.2R12 |
| 200612 | As of the current version of FirstSpirit, the order in which datasets are displayed in and output by <code>FS_INDEX</code> components which are based on foreign key relationships can now be set by an editor. Further information can be found in chapter “Input components: <code>FS_INDEX</code> : Manually Sorting Datasets”. | ContentCreator, Database, Input Components, SiteArchitect, Template Development | 5.2R17 |



| ID | Description | Categories | Version |
|--------|---|---|---------|
| 200630 | <p>As part of the refactoring for the module development in the so-called “Isolated mode” the integrated web server Jetty has been implemented as a module.</p> <p>Further information can be found in chapter “Administration: Isolated mode: Jetty web server is now also available as a module”.</p> | FirstSpirit Administrator, Integrated software, Isolated mode (BETA), Modules | 5.2R13 |
| 200638 | Improved behavior of the attribute <code>regex</code> of the <code><MATCHES/></code> tag in rules (functionality “Dynamic Forms”). | Developer, Dynamic Forms, Template Development | 5.2R12 |
| 200642 | Improved installation process for features that contain datasets. | Content Transport | 5.2R12 |
| 200648 | The detection of the file to be imported has been optimized when using the Import project function. | FirstSpirit Administrator, Project export / import | 5.2R13 |
| 200678 | If a filtered data source is used in conjunction with an FS_DATASET input component and <code>selectorMode="list"</code> , this filter will now also be used for dataset searches in the selection dialog. | Input Components, Search, SiteArchitect | 5.2R12 |
| 200681 | Improved performance of preview calculation. | Preview | 5.2R11 |
| 200690 | Improved display of values of the input component CMS_INPUT_PERMISSION in metadata forms. | ContentCreator | 5.2R10 |
| 200712 | The performance when saving forms with many database references has been improved. | SiteArchitect | 5.2R11 |
| 200726 | The evaluation of the configuration for the integrated preview has been improved. | SiteArchitect | 5.2R14 |
| 200735 | In rare cases, erroneous behavior could occur when displaying the reference graph of a root node. | SiteArchitect | 5.2R11 |
| 200738 | In very rare cases, erroneous behavior could occur in Template Wizard. | Template Wizard | 5.2R12 |
| 200743 | Improved performance of storing and writing revision data. | Performance, Repository | 5.2R12 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 200757 | The logging has been improved when a rule (“dynamic forms”) is erroneous. | Dynamic Forms | 5.2R13 |
| 200764 | In the input component CMS_INPUT_NUMBER, erroneous input will now trigger display of an error message. | SiteArchitect | 5.2R16 |
| 200899 | <p>The current FirstSpirit version now archives revisions and tags whose tag name ends with the , such as revisions and tags created automatically during generation or other Scheduler entries.</p> <p>Further information can be found in chapter “Administration: Archiving: Tagged revisions are now partly taken into account”.</p> | Archiving, FirstSpirit API, FirstSpirit Administrator | 5.2R13 |
| 200941 | In very rare cases, it was possible that not all external references were observed during archiving. | Archiving | 5.2R12 |
| 200994 | Performance improvements related to use of the input component CMS_INPUT_COMBOBOX. | Input Components, SiteArchitect | 5.2R11 |
| 201064 | When restoring an old dataset version, 1:N relationships were erroneously not regarded. | Content Store | 5.2R15 |
| 201109 | Optimized roll-out of web applications during start-up of the FirstSpirit server. | FirstSpirit Administrator | 5.2R15 |
| 201164 | When using cluster generation, an error could arise if user-specific services were used. | Generation, Modules, Services | 5.2R12 |
| 201174 | Improved deletion of elements for which edit mode is activated. | SiteArchitect | 5.2R14 |
| 201198 | Improved observation of own values in the input component CMS_INPUT_COMBOBOX (attribute <code>editable</code>). | Input Components, SiteArchitect | 5.2R12 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 201211 | <p>Identification of objects now uses GIDs (“global IDs”) instead of UIDs. This allows for better matching of objects from a source project to objects in a target project and thus more stable behavior when exporting and importing objects via the functionality “External Synchronization”.</p> <p>Further information can be found in chapter “External Synchronization: External Synchronization: More stable identification of objects (using GIDs)”.</p> | Developer, External synchronization | 5.2R12 |
| 201269 | By implementing Data Access Plug-Ins, external sources can be integrated into FS_INDEX input components. The snippet display for referenced objects has been optimized. | ContentCreator | 5.2R12 |
| 201326 | Improved evaluation of rules within the input component FS_LIST (type DATABASE). | Dynamic Forms, SiteArchitect | 5.2R12 |
| 201348 | In “Multi Perspective Preview” (MPP), optimized the layout of the integrated preview. | Multi Perspective Preview, SiteArchitect | 5.2R15 |
| 201349 | Optimized log messages of the browser engines used for internal preview. | SiteArchitect | 5.2R12 |
| 201358 | Generation on a cluster node could lead to erroneous behavior. | FirstSpirit Administrator, Generation | 5.2R12 |
| 201384 | <p>Passwords in FirstSpirit configuration files can now be encrypted.</p> <p>Further information can be found in chapter “Administration: Encryption of passwords in FirstSpirit configuration files”.</p> | FirstSpirit Administrator, Security | 5.2R16 |
| 201391 | In very rare cases, not all values were copied when creating a copy of a dataset. | ContentCreator | 5.2R12 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 201458 | <p>The behavior of the HTTP header “X-Frame-Options” is now configurable for the FirstSpirit web applications <code>fs5root</code> (start page and SiteArchitect) and <code>fs5webmon</code> (ServerMonitoring). It can be controlled via the parameter <code>frameOptionsHeader</code> in the configuration file <code>fs-server.conf</code>. The new parameter changes the previous default behavior. If embedding of the FirstSpirit web applications (or LiveEdit) into frames of another host should be allowed or if such embedding should generally be prohibited, the configuration parameter must now be set to the appropriate value.</p> <p>Further information can be found in chapter “Security: Behavior of the HTTP header “X-Frame-Options” is now configurable for the FirstSpirit web applications <code>fs5root</code> and <code>fs5webmon</code>”.</p> | FirstSpirit Administrator, FirstSpirit home page, Security, Server Administrator, Server-Monitoring | 5.2R12 |
| 201493 | Improved performance related to media uploads. | ContentCreator, SiteArchitect | 5.2R12 |
| 201502 | When deleting elements using project-specific workflows, the database write protection was incorrectly not taken into account. | Database, Workflow | 5.2R13 |
| 201510 | In rare cases, erroneous behavior could occur when using ContentCreator in Apache Tomcat. | ContentCreator | 5.2R12 |
| 201517 | In very rare cases, erroneous behavior could arise during identification of the page template upon which the Project Settings page is based. | Global settings | 5.2R12 |
| 201532 | Creating a media folder in the Media Store has been improved. | ContentCreator | 5.2R13 |
| 201632 | Improved performance related to the use of many ACL databases. | Performance | 5.2R12 |
| 201679 | In rare cases, erroneous behavior could occur when opening the selection dialog of the input component <code>FS_INDEX</code> . | Input Components, SiteArchitect | 5.2R13 |
| 201690 | Improved start-up of Launcher with proxy settings. | Launcher, SiteArchitect | 5.2R12 |



| ID | Description | Categories | Version |
|--------|---|---|---------|
| 201807 | In SiteArchitect, using the keyboard shortcut <code>Ctrl + Shift + F2</code> in the input components <code>CMS_INPUT_DOM</code> and <code>CMS_INPUT_DOMTABLE</code> will cause the contents of the input component to be written to the SiteArchitect client log with log level "info" (see menu item "Help / View log"). | Input Components, SiteArchitect | 5.2R18 |
| 201881 | New method <code>getServiceConfig</code> in interface <code>ModuleAdminAgent</code> . Further information can be found in chapter "Module Development, Scripts, API: New method "getServiceConfig" in interface "ModuleAdminAgent". | Developer, FirstSpirit API, Module development | 5.2R12 |
| 201906 | Malfunions may have occurred when changing the project description in the project properties. | ServerManager | 5.2R14 |
| 201920 | If an external web application is to be used for the preview in FirstSpirit (a Single Page Application, "SPA", for example), the respective URL can be entered into the "External Preview URL" text field in the FirstSpirit ServerManager under "Project / Properties / ContentCreator settings". Further information can be found in chapter "Administration: Using preview applications in the ContentCreator (TPP)". | ContentCreator, FirstSpirit Administrator, FirstSpirit Third Party Preview, Preview | 5.2R16 |
| 201922 | As of the current FirstSpirit version, it is possible to react via API to page navigation events in ContentCreator. Further information can be found in chapter "Module Development, Scripts, API: Reacting to page navigation events in ContentCreator". | ContentCreator, Developer, FirstSpirit API | 5.2R13 |
| 201926 | Security improvements related to generation. | Generation | 5.2R15 |
| 201949 | When archiving a project, contents of databases that were marked "read-only" were erroneously archived as well. | Archiving, Database, Tasks | 5.2R12 |
| 201974 | When browsing the "Deleted objects" dialog, malfunions could occur if a project has been archived beforehand. | Archiving, SiteArchitect | 5.2R13 |
| 201978 | Remote project configurations have been optimized to take account of deactivated projects. | Remote access | 5.2R13 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 201996 | In rare cases, erroneous behavior could occur while editing scripts. | SiteArchitect, Template Development | 5.2R12 |
| 202049 | In the input component FS_INDEX, improved the consideration of parameters from external data access plugins during auto-completion. | Template Development | 5.2R19 |
| 202051 | While editing list entries in the input components FS_CATALOG or FS_LIST, erroneous behavior could occur when using drag-and-drop from a report. | ContentCreator, Reports | 5.2R13 |
| 202101 | Not maintaining language-dependent media for all languages could lead to malfunctions during the generation process. | Generation | 5.2R13 |
| 202109 | The server configuration layout has been improved. | ServerMonitoring | 5.2R13 |
| 202112 | As of the current version of FirstSpirit, the new interface SearchIndexAgent (package de.espirit.firstspirit.agency, FirstSpirit Developer API) allows project-specific configuration of indexing depth of referenced datasets. Further information can be found in chapter “Search: Project-specific configuration of indexing for referenced datasets”. | Content Store, Developer, FirstSpirit API, Indexing, Input Components, Performance, Search | 5.2R15 |
| 202127 | It is now not possible to import a project with a template set which is missing on the destination server. The import will fail. Further information can be found in chapter “Administration: Importing a project with missing presentation channel”. | Project export / import | 5.2R13 |
| 202175 | When creating a new dataset in a data source the consideration of the edit mode while saving has been improved. | SiteArchitect | 5.2R13 |
| 202264 | In “External Synchronization”, optimized observation of structure variables. | External synchronization | 5.2R14 |
| 202407 | Optimized evaluation of invalid references when saving datasets. | SiteArchitect | 5.2R14 |
| 202425 | In rules (templates), auto-completion mistakenly did not work at locations following a multi-line XML comment. | Template Development | 5.2R17 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 202437 | Synchronizing group definitions which may be transported within the project properties has been improved. | External synchronization | 5.2R13 |
| 202492 | <p>To identify a FirstSpirit element in a certain project language, a new function <code>previewId()</code> similar to the <code>editorId()</code> function has been introduced. The <code>editorId()</code> function has also been expanded to include an additional <code>details</code> parameter.</p> <p>An agent has been implemented as part of the API to analyze the return value.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Expansion of functions for communication between client-side Single Page Application (SPA) and ContentCreator (TPP)”.</p> | ContentCreator, Developer, FirstSpirit API, FirstSpirit Third Party Preview, Module development, Preview, Template Development | 5.2R16 |
| 202504 | Multiple reflexive configurations for remote projects in a project could lead to erroneous behavior in the selection dialog of the input component <code>FS_REFERENCE</code> . | SiteArchitect | 5.2R13 |
| 202510 | The persistence of web components used in global web applications (<code>fs5root</code> , <code>fs5preview</code> , <code>fs5staging</code> , <code>fs5webedit</code>) after a server start has been improved. | FirstSpirit Administrator | 5.2R13 |
| 202600 | <p>The current FirstSpirit version does not transmit information about layers used by the project anymore.</p> <p>Further information can be found in chapter “External Synchronization / Content Transport: Export of database schema information has been modified”.</p> | Content Transport, External synchronization | 5.2R13 |
| 202603 | Optimized consideration of invalid references during reference recalculation. | Content Store, FirstSpirit Administrator | 5.2R17 |
| 202606 | The rule evaluation in combination with the time of execution <code>ONSAVE</code> for the input component <code>FS_LIST</code> (Type <code>SERVICE</code>) has been optimized for ContentCreator. | ContentCreator, Dynamic Forms | 5.2R13 |
| 202640 | Refreshing preview images in templates has been optimized for External Synchronization. | External synchronization | 5.2R13 |



| ID | Description | Categories | Version |
|--------|--|------------------------------|---------|
| 202644 | Optimized synchronization of edit status between different views of the same dataset. | Content Store, SiteArchitect | 5.2R14 |
| 202680 | Selecting a different template for a page (context menu "Extras / Select another template") has been improved. | SiteArchitect | 5.2R13 |
| 202704 | Under Microsoft Windows, when using the Google Chrome browser engine, the required files were rolled out into a wrong user directory. | Preview | 5.2R20 |
| 202716 | With certain constellations of move, release, and delete actions, importing a previously deleted element anew could lead to erroneous behavior. | External synchronization | 5.2R15 |
| 202737 | Improved use of images in snippets in conjunction with user privileges. | SiteArchitect | 5.2R18 |
| 202781 | Deactivating the package property "Changeable" in a master project (removing write permissions) will now also be visualized in subscribing projects. Further information can be found in chapter "Modules: Corporate Content: Removal of write permissions in subscribing projects ("Changeable")". | Corporate Content | 5.2R15 |
| 202888 | The new FirstSpirit Developer API interface <code>de.espirit.firstspirit.agency.ProjectMembersAgent</code> now provides access to information about users and groups of a project. Further information can be found in chapter "Module Development, Scripts, API: New API interface "ProjectMembersAgent" provides information about users and groups". | Developer, FirstSpirit API | 5.2R15 |
| 202897 | The display of search results containing quoted HTML code was optimized. | ContentCreator | 5.2R19 |
| 202921 | When trying to import a new schema into a project without specifying a suitable layer mapping, an error message is output. Additionally, the import will now also be aborted at the correct time. | External synchronization | 5.2R14 |



| ID | Description | Categories | Version |
|--------|---|---|---------|
| 202938 | Recalculation of references has been optimized for slower systems. | FirstSpirit Administrator | 5.2R16 |
| 202949 | In rare cases, it was possible that the reference name of a node was not released after that node was deleted and the delete operation was released. | Release, SiteArchitect | 5.2R15 |
| 202959 | Optimized uploading of files of type <code>.json</code> . | SiteArchitect | 5.2R14 |
| 202965 | The display of controls has been optimized for use with Google Chrome browser in version 61 and higher. | ContentCreator | 5.2R13 |
| 203002 | Optimized observance of validation errors when releasing a FirstSpirit element using the option “Check only - do not release”. | Dynamic Forms, Release | 5.2R15 |
| 203023 | Optimized consideration of privileges which are defined on the data source when editing datasets in the input component FS_LIST (type DATABASE). | ContentCreator | 5.2R17 |
| 203032 | When creating a new page via the dialog “Create new page”, the name of the page can be added and edited only in the name area but not in the navigation area. | ContentCreator | 5.2R15 |
| 203113 | When using “isolated mode”, subsequent changes to URLs in “URL Settings” were mistakenly not observed. | SiteArchitect | 5.2R15 |
| 203183 | Optimized storage handling during project archival. Further information can be found in chapter “Administration: Project archiving: Abort archival due to insufficient available storage space”. | Archiving | 5.2R15 |
| 203190 | As of the current FirstSpirit version, FirstSpirit SiteArchitect requires at least 1024MB of free main memory, as opposed to the previously required 768MB. Further information can be found in chapter “General: Main memory requirements for FirstSpirit SiteArchitect”. | FirstSpirit Administrator, Server Administrator | 5.2R15 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 203220 | <p>When running on the operating system macOS High Sierra (macOS version 10.13), erroneous behavior could occur during use of the integrated preview.</p> <p>An update of the integrated Chrome browser engine “JxBrowser” to version 6.15 corrected this issue.</p> <p>Further information can be found in chapter “System: Integrated software”.</p> | Preview, SiteArchitect | 5.2R14 |
| 203249 | When copying objects from a package in the destination project errors could occur, when the subscription was not marked as “changeable”. | Corporate Content | 5.2R19 |
| 203254 | Optimization for mass data requests on datasets. | Database, Performance | 5.2R16 |
| 203314 | In very rare cases, SiteArchitect could be displayed in an erroneous fashion. | SiteArchitect | 5.2R15 |
| 203340 | Erroneous behavior could arise when deleting a folder in the Page Templates section of the Templates store. | SiteArchitect | 5.2R18 |
| 203352 | While displaying objects included in a feature, erroneous behavior could occur. | Content Transport | 5.2R16 |
| 203364 | <p>The browser engine “JxBrowser”, used to integrate “Google Chrome”, has been updated to version 6.18. This corrected an issue which could occur during use of “Multi Perspective Preview” (MPP).</p> <p>Further information can be found in chapter “System: Updated third-party software”.</p> | Editor, Integrated software, Multi Perspective Preview, SiteArchitect | 5.2R18 |
| 203380 | <p>Contents from metadata which are defined explicitly on a given element may now be output in snippet definitions using the new system object <i>#meta</i>.</p> <p>Further information can be found in chapter “SiteArchitect / ContentCreator: Snippets: Outputting Metadata”.</p> | Developer, Snippets | 5.2R18 |
| 203385 | Improvements of the module “FirstSpirit BasicSearch”. | Isolated mode (BETA) | 5.2R16 |



| ID | Description | Categories | Version |
|----------------------------|--|---|---------|
| 203454 | <p>As of the current FirstSpirit version, FirstSpirit provides a new option related to project generation. In the generation schedule action, the option “Generate release version” now allows specification of whether the action should generate the release version (checkbox marked; default setting) or the current state (checkbox unmarked) of the project.</p> <p>Further information can be found in chapter “Administration: Schedule management, action “Execute generation”: New setting - Generate release version or current state”.</p> | FirstSpirit Administrator, Generation, Release, Server-Manager, Tasks | 5.2R15 |
| 203465 | Optimized rendering of the input component CMS_INPUT_PERMISSION. | ContentCreator | 5.2R16 |
| 203508 | In proprietary modules, circular dependencies will now be identified in a timely fashion and logged accordingly. Circular references remain unsupported. | Developer | 5.2R15 |
| 203517 | Optimized connection establishment to the cluster slave node after a restart of the cluster master server. | Clustering | 5.2R16 |
| 203522 | Clustering: In the current version of FirstSpirit, problems were resolved that could arise during activation of cluster nodes, especially following an update of the master server. | Clustering, Server Administrator, Server-Manager | 5.2R16 |
| 203556 198194 204356 | <p>As of FirstSpirit version 5.2R18, support for Java 9 (for FirstSpirit Server and Clients) will be part of the early access program.</p> <p>Further information can be found in chapter “System: Using Java 9 (EAP)”.</p> | FirstSpirit Administrator | 5.2R18 |
| 203585 | <p>FS_INDEX: multiple selection possible in selection dialog</p> <p>Further information can be found in chapter “ContentCreator: FS_INDEX: multiple selection possible in selection dialog”.</p> | ContentCreator | 5.2R20 |
| 203695 | In “External Synchronization”, optimized observance of references to elements without UID. | External synchronization | 5.2R15 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 203760 | Optimized display of inner, multi-language forms in FS_LIST, FS_INDEX, and FS_CATALOG. Further information can be found in chapter “Input components: FS_LIST, FS_INDEX, FS_CATALOG: Optimization of Multi-Language Display”. | Editor, Languages, SiteArchitect | 5.2R19 |
| 203797 | When moving several elements via drag-and-drop in the input component FS_LIST, the sort order was erroneously not observed. | SiteArchitect | 5.2R15 |
| 203818 | When the server was restarted, global customer-specific web applications were erroneously always rolled out anew. | ServerManager | 5.2R16 |
| 203835 | Optimized status display when updating a dataset using the functionality “ContentTransport”. | Content Transport | 5.2R16 |
| 203860 | Optimized behavior when canceling an archival task. | Archiving | 5.2R16 |
| 203870 | When using Google Chrome as a browser engine for the integrated preview, opening selection dialogs could seldomly lead to erroneous behavior. | SiteArchitect | 5.2R15 |
| 203884 | Optimized roll-out of web applications during restart of the FirstSpirit server. | Server Administrator | 5.2R16 |
| 203895 | Improved performance of image media creation during feature installation. | Content Transport, Media Store | 5.2R16 |
| 203910 | The current FirstSpirit version provides new MBeans. Further information can be found in chapter “Administration: New MBeans”. | FirstSpirit Administrator | 5.2R15 |
| 203962 | As of the current FirstSpirit version, the configuration possibilities for information displays in ContentCreator have been extended: <code>WE_API.Common.showMessage(String title, String text)</code> Further information can be found in chapter “Module Development, Scripts, API: ContentCreator: Extended configuration possibilities for information displays (WE_API)”. | ContentCreator, Developer, FirstSpirit API | 5.2R15 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 204026 | Improved refreshing of detail views (content projection page). | ContentCreator | 5.2R19 |
| 204052 | <p>The new interface <code>RenderingAgent</code> (package <code>de.espirit.firstspirit.agency</code>, FirstSpirit Developer API) is available as of the current FirstSpirit version.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: API Extension: <code>RenderingAgent</code> - Generating FirstSpirit content via API”.</p> | Developer, FirstSpirit API, Module development | 5.2R15 |
| 204098 | <p>As of the current version of FirstSpirit, custom project properties (“custom properties”) may now be synchronized using “FirstSpirit External Synchronization”.</p> <p>Further information can be found in chapter “External Synchronization: Consideration of Custom Properties in External Synchronization”.</p> | External synchronization, FirstSpirit API | 5.2R17 |
| 204125 | In the input component <code>CMS_INPUT_IMAGE_MAP</code> , certain conditions could lead to used images not being considered in the reference graph. | Input Components | 5.2R15 |
| 204178 | Optimized error handling for missing table templates of data sources. | ContentCreator | 5.2R16 |
| 204213 | When using the method <code>urlFactory(String)</code> of the interface <code>RenderingAgent.Renderer</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.agency</code>), erroneous behavior could occur. | Developer | 5.2R16 |
| 204241 | <p>With the current FirstSpirit version repository conversions from Oracle Berkeley DB version 3 to version 5 are executed faster.</p> <p>Further information can be found in chapter “Repository: Faster migration from Oracle Berkeley DB 3 to 5”.</p> | FirstSpirit Administrator, Integrated software, Performance, Repository, Server Administrator, Server-Manager | 5.2R16 |



| ID | Description | Categories | Version |
|--------|--|--|---------|
| 204247 | In the current FirstSpirit version, updated internally used software. Further information can be found in chapter “System: Update of libraries”. | SiteArchitect | 5.2R16 |
| 204281 | The display of user sessions in FirstSpirit ServerMonitoring was intermittently erroneous due to incorrectly stored graph data. Further information can be found in chapter “Administration: FirstSpirit ServerMonitoring: Display of user sessions”. | ServerMonitoring | 5.2R16 |
| 204283 | Optimized check for new FirstSpirit versions in the Health Center of FirstSpirit ServerMonitoring. | Health Center | 5.2R18 |
| 204490 | In order to allow better problem analysis on workflows, logging was extended. | Workflow | 5.2R18 |
| 204526 | Optimized consideration of erroneous revision metadata during archiving. | Archiving, Backup | 5.2R18 |
| 204544 | Different validation behavior for different languages. Further information can be found in chapter “SiteArchitect / ContentCreator: Different Validation Behavior for Different Languages”. | Developer, Dynamic Forms, Editor, FirstSpirit API, Languages, Server-Manager | 5.2R19 |
| 204557 | Misconfiguration of the Permission Service could lead to erroneous behavior. | Server Administrator | 5.2R16 |
| 204577 | The interface <code>RenderingAgent</code> (package <code>de.espirit.firstspirit.agency</code> , FirstSpirit Developer API) supports remote links as well as of the current FirstSpirit version. Further information can be found in chapter “Module Development, Scripts, API: RenderingAgent supports remote links”. | Developer, FirstSpirit API, Module development | 5.2R16 |
| 204586 | Improved e-mail dispatch. | SiteArchitect, Workflow | 5.2R17 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 204594 | Integrity checking of Jar files on FirstSpirit startup was improved. | Server Administrator | 5.2R19 |
| 204644 | Related to the functionality “Multi Perspective Preview” (MPP), improved scrolling behavior in the preview. | ContentCreator | 5.2R18 |
| 204653 | Performance improvements related to the integrated preview when using Google Chrome as browser engine. | Performance, SiteArchitect | 5.2R17 |
| 204665 | Under macOS, windows were in rare cases not opened in the foreground. | ServerManager, SiteArchitect | 5.2R17 |
| 204688 | Optimized method <code>getStartNodes()</code> of the interface <code>GenerateTask</code> (FirstSpirit Access API, package <code>de.espirit.firstspirit.access.schedule</code>). | Developer, FirstSpirit API | 5.2R17 |
| 204762 | Global system web apps can now also be retrieved with the new method <code>getGlobalWebApps(boolean includeSystem)</code> in the interface <code>ModuleAdminAgent</code> (package <code>de.espirit.firstspirit.agency</code> , FirstSpirit Developer API). Further information can be found in chapter “Module Development, Scripts, API: Retrieving global system web apps”. | Developer, FirstSpirit API, Module development | 5.2R20 |
| 204764 | Improved status display for released pages. | ContentCreator | 5.2R19 |
| 204784 | Erroneous behavior could occur in the display of customer-specific action buttons in the toolbar. | SiteArchitect | 5.2R17 |
| 204795 | Erroneous behavior could arise when changing action settings while the associated server schedule task was running. | ServerManager | 5.2R19 |
| 204870 | Oracle Berkeley DB 7 can be used for project repositories as of the current FirstSpirit version. Further information can be found in chapter “Repository: Oracle Berkeley DB 7 (EAP)”. | Repository | 5.2R18 |
| 204910 | In rare cases, when restoring deleted objects, the dialog was not displayed. | SiteArchitect | 5.2R17 |



| ID | Description | Categories | Version |
|--------|--|-------------------------------------|---------|
| 204958 | When using OpenJDK 8, erroneous behavior could arise during roll-out of web applications. | Server Administrator | 5.2R17 |
| 205151 | Security improvements in the Media Store in ContentCreator. | Security | 5.2R17 |
| 205152 | Security improvements in FirstSpirit ServerManager. | Security | 5.2R17 |
| 205154 | Security improvements in FirstSpirit ServerMonitoring. | Security | 5.2R17 |
| 205155 | Security improvements for the search functionality in Content-Creator. | Security | 5.2R17 |
| 205156 | Security improvements in FirstSpirit ServerMonitoring. | Security | 5.2R17 |
| 205164 | Erroneous behavior could arise when opening forms which are defined in schedule tasks. | Isolated mode (BETA) | 5.2R20 |
| 205182 | Changes regarding the class <code>AccessControlDb</code> (package <code>de.espirit.firstspirit.acl.db</code>). Please see Chapter 3. | Developer, FirstSpirit API, Modules | 5.2R17 |
| 205227 | Under macOS, windows were in rare cases not opened in the foreground. | ServerManager, SiteArchitect | 5.2R18 |
| 205265 | In the database-linked input component <code>CMS_INPUT_CHECKBOX</code> , optimized display of checked values. | SiteArchitect | 5.2R18 |
| 205268 | Optimized the compatibility module. | Isolated mode (BETA) | 5.2R17 |
| 205289 | Erroneous behavior could arise when streams were used in a service. | Module development | 5.2R19 |
| 205290 | Optimized method <code>install(InputStream, boolean)</code> of the interface <code>ModuleAdminAgent</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.agency</code>). | Developer, FirstSpirit API | 5.2R17 |
| 205315 | Optimized consideration of FirstSpirit build number in the file <code>Project.xml</code> in order to improve mergeability. | External synchronization | 5.2R18 |
| 205316 | During export, unmapped IDs will now be logged with a warning. | External synchronization | 5.2R18 |
| 205339 | Intermittently, references between the API documentations for FirstSpirit Access API and FirstSpirit Developer API were not rendered correctly. | Developer, FirstSpirit API | 5.2R17 |



| ID | Description | Categories | Version |
|--------|---|--|---------|
| 205556 | <p>The latest version of FirstSpirit provides a conversion tool (currently still the Early Access Program (“EAP”)) that can be used for the simple conversion of all data stored in Berkeley DBs on existing FirstSpirit servers to Berkeley DB 7 format by entering just a few commands in the command line (“project repositories” and “internal repositories”).</p> <p>Further information can be found in chapter “Administration: Conversion of the Oracle Berkeley DB (EAP)”.</p> | FirstSpirit Administrator, Integrated software, Repository | 5.2R19 |
| 205574 | Related to the functionality “FirstSpirit ContentTransport”, a meaningful error message will now be displayed if elements of the Templates store cannot be added to the feature. | Content Transport | 5.2R18 |
| 205624 | Optimized editing of the configuration file for server start options (<code>fs-wrapper.conf</code>) via ServerMonitoring. | Isolated mode (BETA) | 5.2R18 |
| 205672 | Performance optimizations related to loading database-based content. | Performance | 5.2R18 |
| 205712 | Optimized method <code>getOperation(OperationType<P>)</code> in interface <code>OperationAgent</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.agency</code>). | FirstSpirit API | 5.2R18 |
| 205713 | <p>An error has been fixed which could lead to incorrect evaluation of group and user information in ContentCreator forms which were opened using the interface <code>ShowFormDialogOperation</code> (package <code>de.espirit.firstspirit.ui.operations</code>, FirstSpirit Developer API).</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Extended functionality for FS_BUTTON scripts”.</p> | Developer, FirstSpirit API | 5.2R18 |



| ID | Description | Categories | Version |
|------------------|---|--|---------|
| 205721 205744 | As of the current version of FirstSpirit, the interface <code>RenderingAgent</code> (package <code>de.espirit.firstspirit.agency</code> , FirstSpirit Developer API) also supports passing of FirstSpirit templates and thus the opportunity to render output channel source code as desired. Furthermore, you can now determine whether or not project settings (in FirstSpirit SiteArchitect under “Global settings”) should be considered during generation. Further information can be found in chapter “Module Development, Scripts, API: Extension of the interface “RenderingAgent””. | FirstSpirit API | 5.2R18 |
| 205727 | In some rare cases, URLs created with the <code>RenderingAgent</code> for media from the same project and from remote projects were not correct. | Generation, Template Development | 5.2R19 |
| 205728 | Erroneous behavior could occur when using the ContentCreator JavaScript API in combination with the <code>RenderingAgent</code> and the <code>fsbutton(...)</code> function. | ContentCreator, FirstSpirit API, Template Development | 5.2R19 |
| 205787 | Erroneous behavior could arise when displaying related elements. | ContentCreator | 5.2R18 |
| 205814 | In rare cases, display of the “favicon” of the FirstSpirit start page was erroneous. | FirstSpirit home page | 5.2R18 |
| 205819 206024 | As of FirstSpirit version 5.2R18 the module <code>fs-jetty.fsm</code> can also be used with FirstSpirit servers that are not operated in “isolated mode” but in “legacy mode”. Further information can be found in chapter “System: Using Jetty as a module (EAP)”. | FirstSpirit Administrator, Integrated software, Modules, ServerManager | 5.2R18 |
| 205823 203733 | Improved visualization of modified sections. | ContentCreator | 5.2R18 |



| ID | Description | Categories | Version |
|------------------|---|--|---------|
| 205846 | <p>The interface <code>ScheduleStorage</code> (package <code>de.espirit.firstspirit.access.schedule</code>, FirstSpirit Access API) was extended with the method <code>createScheduleEntry(String name, Project project)</code>, and the privilege evaluation for creation of schedule entries via the method <code>createScheduleEntry(String)</code> was improved.</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Extension of the interface “ScheduleStorage””.</p> | FirstSpirit API, FirstSpirit Administrator | 5.2R18 |
| 205861 | Optimized installation of FirstSpirit servers in <i>Isolated mode</i> (“RISO”) on Linux operating systems as the <code>root</code> user. | Isolated mode (BETA), Server Administrator | 5.2R18 |
| 205866 | In rare cases, erroneous behavior could arise when editing contents of an <code>FS_LIST</code> (type <code>DATABASE</code>) input component. | SiteArchitect | 5.2R18 |
| 205868 | Optimized display of the page status which can be visualized using the plugin <code>WebeditStatusNotePlugin</code> . | ContentCreator | 5.2R18 |
| 205881 | When generating pages in a <code>ContentCreator</code> context via the interface <code>RenderingAgent</code> (package <code>de.espirit.firstspirit.agency</code> , FirstSpirit Developer API), subsessions will now be considered. | Developer, FirstSpirit API | 5.2R18 |
| 205964 | <p>The FirstSpirit server allows creation of several LDAP configurations (so-called “sections”). Each section contains at least one entry for an LDAP server which provisions LDAP data. If a server fails or takes too long to answer (>30 seconds), timeouts (of the LDAP connection and of login to the root web application) may arise. The time span after which a timeout occurs may now be increased via the parameters <code>web.login.timeout</code> and <code>LDAP.TIMEOUT</code> (default value: 30).</p> <p>Further information can be found in chapter “Administration: New Configuration Opportunity for Timeouts in LDAP Sections and for Login to the Root Web Application (<code>fs-server.conf</code>)”.</p> | FirstSpirit Administrator, ServerManager | 5.2R20 |
| 206024 205819 | Eliminated problems when using the internal Jetty | FirstSpirit Administrator, Integrated software | 5.2R18 |



| ID | Description | Categories | Version |
|--------------------------------------|--|--|---------|
| 206061 205256 206060 206951 | Rebrush for FirstSpirit graphical user interfaces: improvements and optimizations. Further information can be found in chapter “SiteArchitect / ContentCreator: Rebrush for FirstSpirit graphical user interfaces”. | ContentCreator, FirstSpirit home page, SiteArchitect | 5.2R19 |
| 206115 | For files whose MIME type cannot be recognized (e. g. files with the file extension “rfa” or “oft”), the file extension “doc” was mistakenly used. In the FirstSpirit configuration file “fs-server.conf”, corresponding MIME types can be defined for certain file types (e. g. “mime.types.additional=application/octet-stream:rfa; application/octet-stream:oft”), in case automatic detection is not possible. Temporarily, this information was not correctly taken into account when importing into the media management system. | Generation | 5.2R19 |
| 206154 | Optimized schedule management. Further information can be found in chapter “Administration: Optimization in Schedule Management”. | FirstSpirit Administrator, ServerManager, Tasks | 5.2R18 |
| 206156 | New API for password encryption Further information can be found in chapter “Module Development, Scripts, API: Interface “PasswordAgent”: encrypt passwords through the API”. | FirstSpirit API, FirstSpirit Administrator, Security | 5.2R19 |
| 206161 | Optimized interpretation of configuration files of “PermissionService” (module “Permission”). | Modules | 5.2R20 |
| 206164 | Optimized parameters for garbage collector logging of FirstSpirit server. | Developer | 5.2R18 |
| 206229 | Erroneous behavior could arise when opening module configuration dialogs. | FirstSpirit Administrator, ServerManager | 5.2R18 |
| 206289 | When deleting sections no new version (entry in the version history) was created, erroneously. | ContentCreator | 5.2R19 |



| ID | Description | Categories | Version |
|--------|--|---|---------|
| 206299 | <p>There are now additional setting options for the FirstSpirit start page. Applications can be shown or hidden via groups / permissions on the start page.</p> <p>Further information can be found in chapter “SiteArchitect / ServerManager: Configuration of the FirstSpirit start page”.</p> | FirstSpirit Administrator, FirstSpirit home page, Server Administrator, ServerManager | 5.2R19 |
| 206317 | Erroneous behavior could arise when recursively calling the method <code>render()</code> of the interface <code>RenderingAgent.Renderer</code> (package <code>de.espirit.firstspirit.agency</code> , FirstSpirit Developer API). | Developer | 5.2R18 |
| 206326 | Improved initialization of remote logging for web applications when using an external Jetty web server or the Jetty module. | Server Administrator | 5.2R19 |
| 206363 | When using Microsoft Internet Explorer 11, displaying EasyEdit buttons could have been erroneous. | ContentCreator | 5.2R19 |
| 206508 | <p>New method <code>createDataset()</code> in the interface <code>DatasetProvider</code> (package <code>de.espirit.firstspirit.access.store.contentstore</code>, FirstSpirit Access API)</p> <p>Further information can be found in chapter “Module Development, Scripts, API: Interface “DatasetProvider”: Creating a new dataset”.</p> | Content Store, Developer, FirstSpirit API | 5.2R19 |
| 206521 | Optimized consideration of changes in connection settings. | FirstSpirit home page | 5.2R18 |
| 206522 | Optimized display of action names in the keyboard shortcut list (menu: “Help / Keyboard shortcuts”). | SiteArchitect | 5.2R18 |
| 206555 | <p>The module providing the web server “Eclipse Jetty” (currently in the Early Access Program (“EAP”)) now supports encrypted connections via HTTPS. Configuration of the required keystore is done by using the configuration dialog of the module in ServerManager.</p> <p>Further information can be found in chapter “Administration / Modules: HTTPS Support for the Module “Eclipse Jetty” (EAP)”.</p> | FirstSpirit Administrator, Modules | 5.2R19 |



| ID | Description | Categories | Version |
|--------|---|---|---------|
| 206613 | Deletion of the search index (~firstSpirit\data\projects\project_123\index) when executing the schedule “Rebuild search index” has been modified. | FirstSpirit Administrator, ServerManager, Tasks | 5.2R19 |
| 206634 | The editing of nested data in content projections has been improved. Moreover, when creating list entries in FS_CATALOG, FS_INDEX or FS_LIST (with type DATABASE or INLINE) via so called “NewListEntryExecutables” (de.espirit.firstspirit.webedit.server.executables.NewListEntryExecutable, see also <i>FirstSpirit Online Documentation</i> , “Template development / ContentCreator / Functional scope”), the corresponding preview page will be refreshed (instead of showing the preview page which is defined for the related table template). | ContentCreator | 5.2R19 |
| 206802 | Optimized evaluation of restrictions when searching in the selection dialog of an input component (e.g. FS_REFERENCE). | ContentCreator | 5.2R19 |
| 206839 | For new actions, the option “Execute even in case of error” is turned off by default. Further information can be found in chapter “Administration: Schedule Tasks: Option “Execute even in case of error” is turned off by default”. | FirstSpirit Administrator, ServerManager, Tasks | 5.2R19 |
| 206876 | The display of the FirstSpirit startpage in Microsoft Internet Explorer 10 has been improved. | FirstSpirit home page | 5.2R19 |
| 206903 | Adjusted cluster configuration (files fs-wrapper.slave.conf and fs-wrapper.isolated.slave.conf) for Java 9. | Clustering, FirstSpirit Administrator | 5.2R19 |
| 206949 | The display in Microsoft Internet Explorer 10 has been improved. | ContentCreator | 5.2R19 |
| 206954 | Erroneous behavior could arise when inputting a time into the input component CMS_INPUT_DATE if the FirstSpirit server was configured with a different time zone than that of the client in which the time input was carried out. | ContentCreator | 5.2R20 |



| ID | Description | Categories | Version |
|--------------------------------------|---|--|---------|
| 207009 | An error could occur in the ContentCreator when using the module "FirstSpirit Security". | FirstSpirit Administrator, Modules | 5.2R19 |
| 207167 | The installation of local feature files has been improved. | Content Transport | 5.2R20 |
| 207267 | Fixed a problem with the possible use of illegal filenames in the repository back-end under Windows. | FirstSpirit Administrator, Repository | 5.2R19 |
| 207297 | The use of SEO URLs in conjunction with parallel generation actions has been improved. | Tasks | 5.2R20 |
| 207348 | When using the Jetty module, the handling of web applications was optimized when restarting the server. | Server Administrator | 5.2R20 |
| 207377 208105 208149 | <p>Various improvements have been made to the conversion tool provided with FirstSpirit version 5.2R19. This tool can be used for the simple conversion of all data stored in Berkeley DBs on existing FirstSpirit servers to Berkeley DB 7 format by entering just a few commands in the command line, and it is still in "EAP" state (early access program).</p> <p>Further information can be found in chapter "Administration: Conversion of the Oracle Berkeley DB (EAP)".</p> | FirstSpirit Administrator, Integrated software, Repository | 5.2R20 |
| 207392 | User principals were not correctly regarded when using multiple login modules in sequence. | FirstSpirit Administrator | 5.2R20 |
| 207420 | <p>In the current FirstSpirit version, updated internally used software.</p> <p>Further information can be found in chapter "System: Integrated Software".</p> | Integrated software | 5.2R19 |
| 207446 207489 207504 207892 | <p>In the current FirstSpirit version, updated internally used software.</p> <p>Further information can be found in chapter "System: Integrated Software".</p> | Integrated software | 5.2R20 |
| 207450 | Optimized adoption via API of values in the input component FS_CATALOG between projects with different language sets. | SiteArchitect | 5.2R20 |



| ID | Description | Categories | Version |
|------------------|--|--|---------|
| 207452 | Optimized refresh of the integrated preview when switching between languages while editing inner entries of the input component FS_CATALOG. | Preview, SiteArchitect | 5.2R20 |
| 207501 | Elements of the <code>WebeditStatusNotePlugin</code> may have been displayed incorrectly when activating Multi Perspective Preview (MPP). | ContentCreator | 5.2R19 |
| 207573 | The option “All permissions” for modules is better accounted for. | Isolated mode (BETA) | 5.2R19 |
| 207662 | New TPP-API functions improve ContentCreator integration of TPP WebApps. Further information can be found in chapter “Module Development, Scripts, API: New functions in “WE-API””. | Developer, FirstSpirit API, Module development, Modules, Third Party Preview (TPP) | 5.2R20 |
| 207665 208005 | Berkeley DB 7 now checks for sufficient available storage space and prohibits further write operations if storage space is insufficient. Further information can be found in chapter “Repository: Berkeley DB 7: Optimizations”. | Integrated software, Repository, Security | 5.2R20 |
| 207731 | In ContentCreator, erroneous behavior could arise in the display of preview images in editing dialogs. | Isolated mode (BETA) | 5.2R20 |
| 207787 | The identification of the java version which is used by FirstSpirit was optimized. | Integrated software | 5.2R20 |
| 207794 | With the current FirstSpirit version you can, using the “WE_API”, register for events that are fired when creating a new page, when changing the navigation, or when using workflows within the current session. Further information can be found in chapter “Module Development, Scripts, API: “WE_API” has new events”. | Developer, FirstSpirit API, Module development, Modules, Third Party Preview (TPP) | 5.2R20 |
| 207808 | Design touch-ups and optimizations related to SiteArchitect. | SiteArchitect | 5.2R20 |



| ID | Description | Categories | Version |
|------------------|--|--|---------|
| 207818 207377 | <p>When publishing via the FirstSpirit publication servlet (module: "FirstSpirit Security"), an error message is now output if the target side attempts to communicate with an unusable access control database. Use of this change requires an update of the module "FirstSpirit Security" in the web application on the target side.</p> <p>Further information can be found in chapter "Modules: Security: Improved Problem Recognition When Accessing an Access Control Database".</p> | Modules, Security, Server Administrator, ServerManager | 5.2R20 |
| 207899 | In cluster operations, improved use of write-protected mounted directories. | Clustering | 5.2R20 |
| 207945 | <p>The module <code>fs-jetty.fsm</code> is available as system module as of the current FirstSpirit version.</p> <p>Further information can be found in chapter "Administration: Web server "Jetty" is now system module".</p> | FirstSpirit Administrator, Integrated software, Modules, Server Administrator, ServerManager | 5.2R20 |
| 207979 | Erroneous behavior could arise during project export and import. | Project export / import | 5.2R20 |
| 208171 | Erroneous behavior could arise during output of nested data in content projections via <code>"\$CMS_VALUE(_dataset.formData)\$"</code> . | Developer | 5.2R20 |
| 208214 | Optimized consideration of preferred display language in workflow forms. | SiteArchitect, Workflow | 5.2R20 |
| 208229 | Erroneous behavior could arise when jumping to a template (within a <code>CMS_RENDER</code> statement) via <code>Ctrl + LEFT CLICK</code> . | Developer | 5.2R20 |
| 208310 | Optimized permission management in the interface <code>ModuleAdminAgent</code> (FirstSpirit Developer API, package <code>de.espirit.firstspirit.agency</code>). | FirstSpirit API, Permissions | 5.2R20 |
| 208401 | Optimized error handling for syntactically incorrect regular expressions (e.g. when searching within an output channel). | Developer | 5.2R20 |

